




LED line





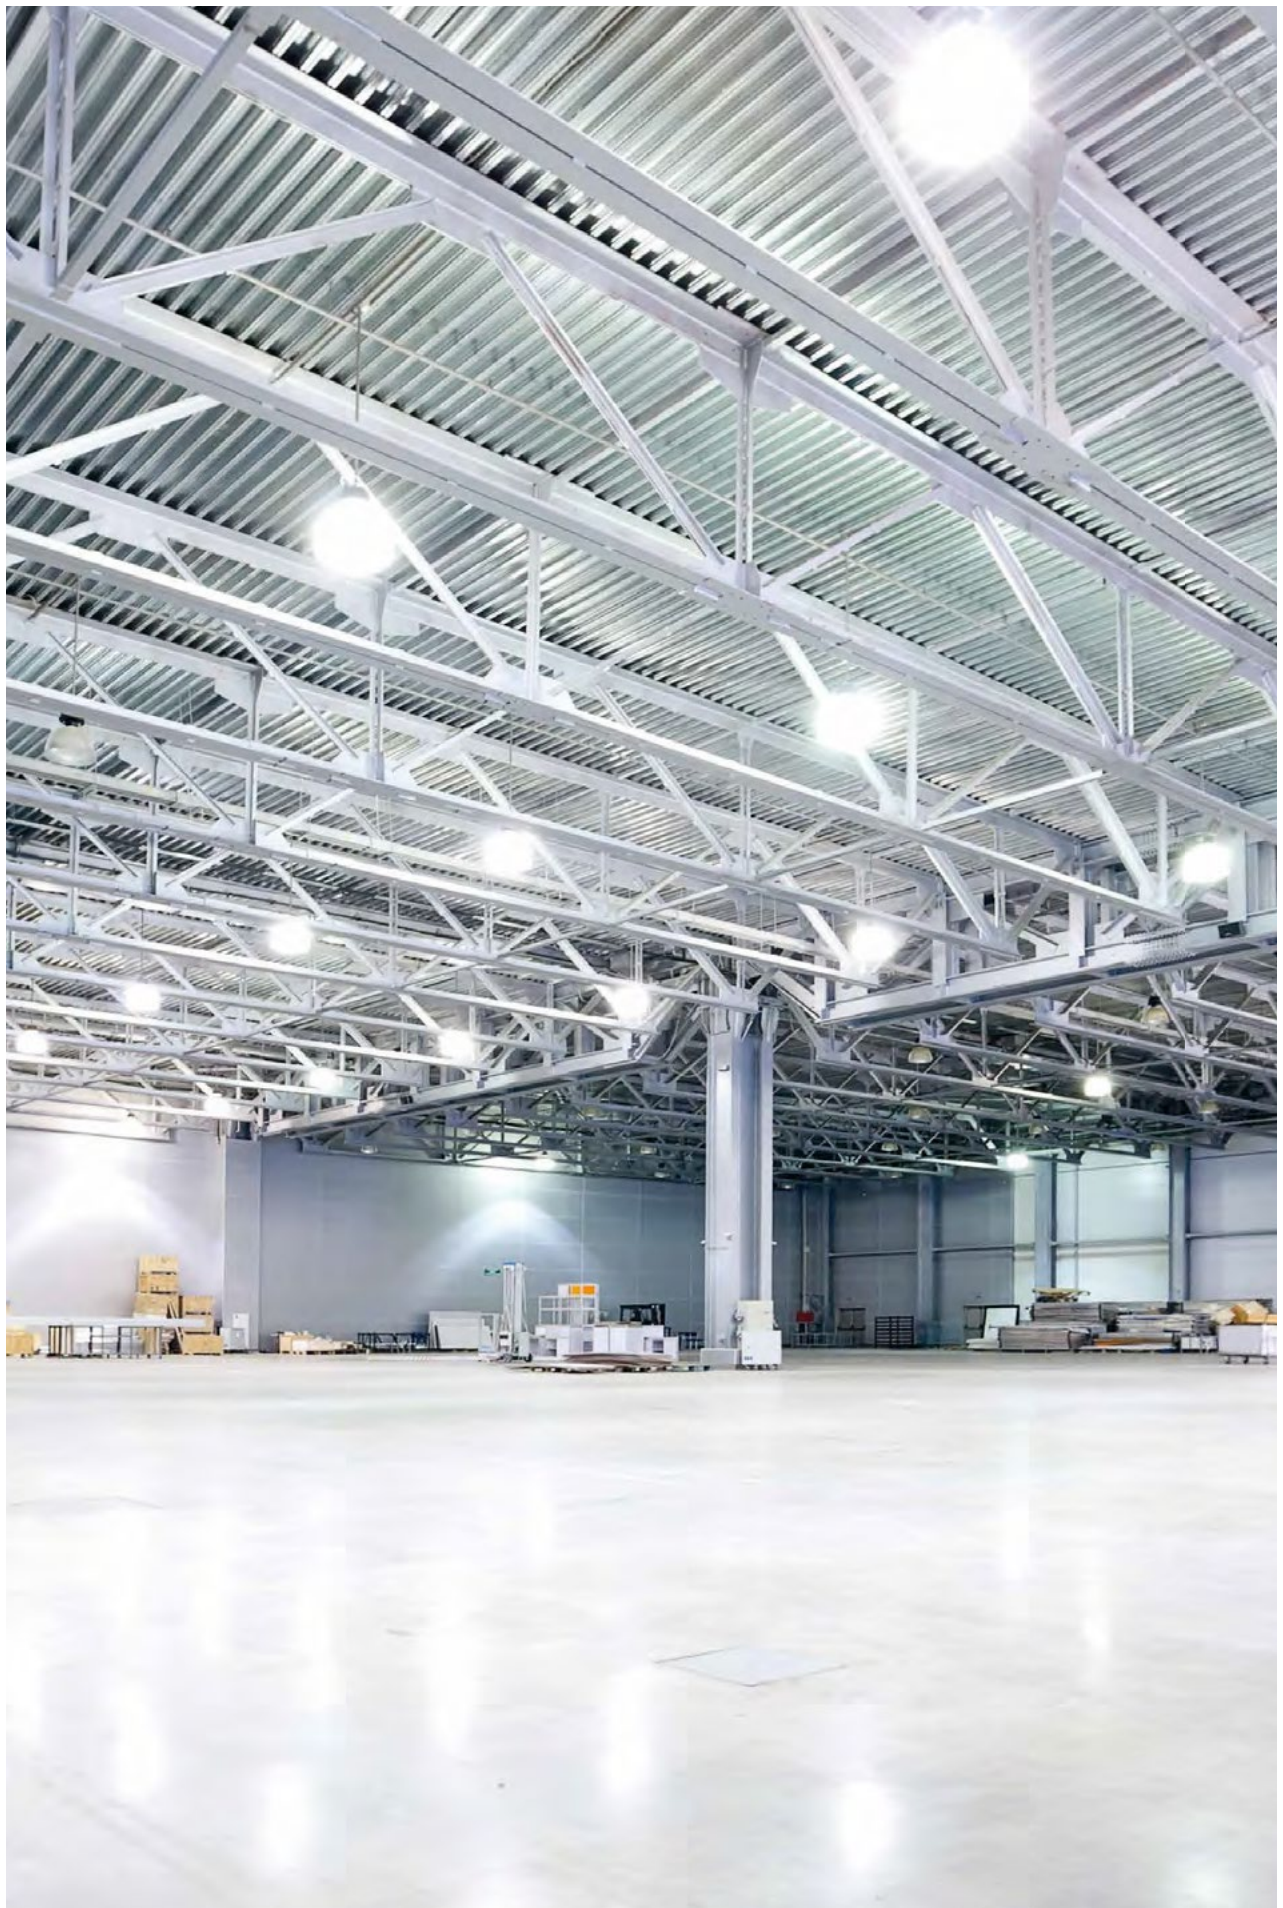














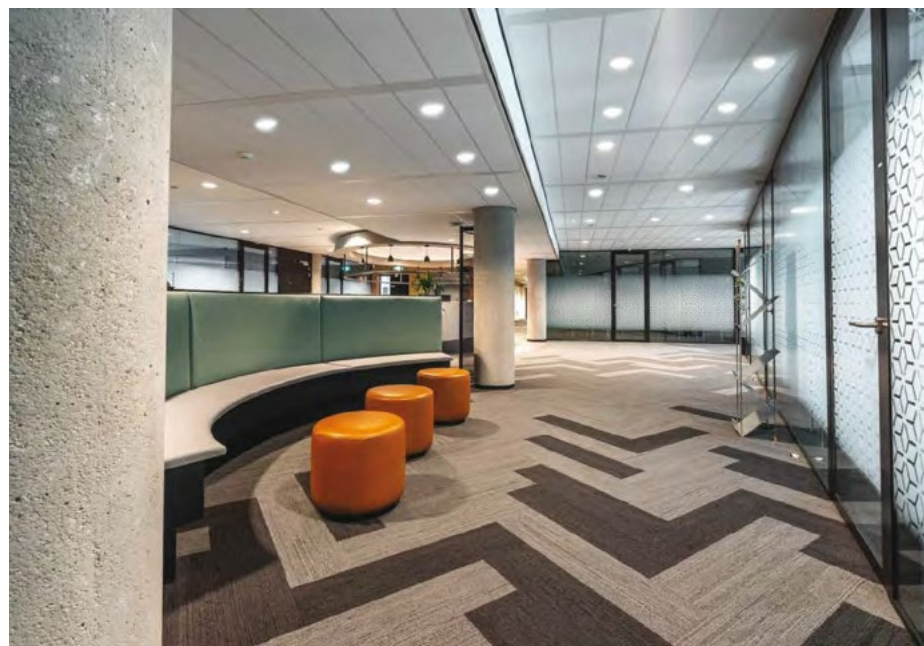





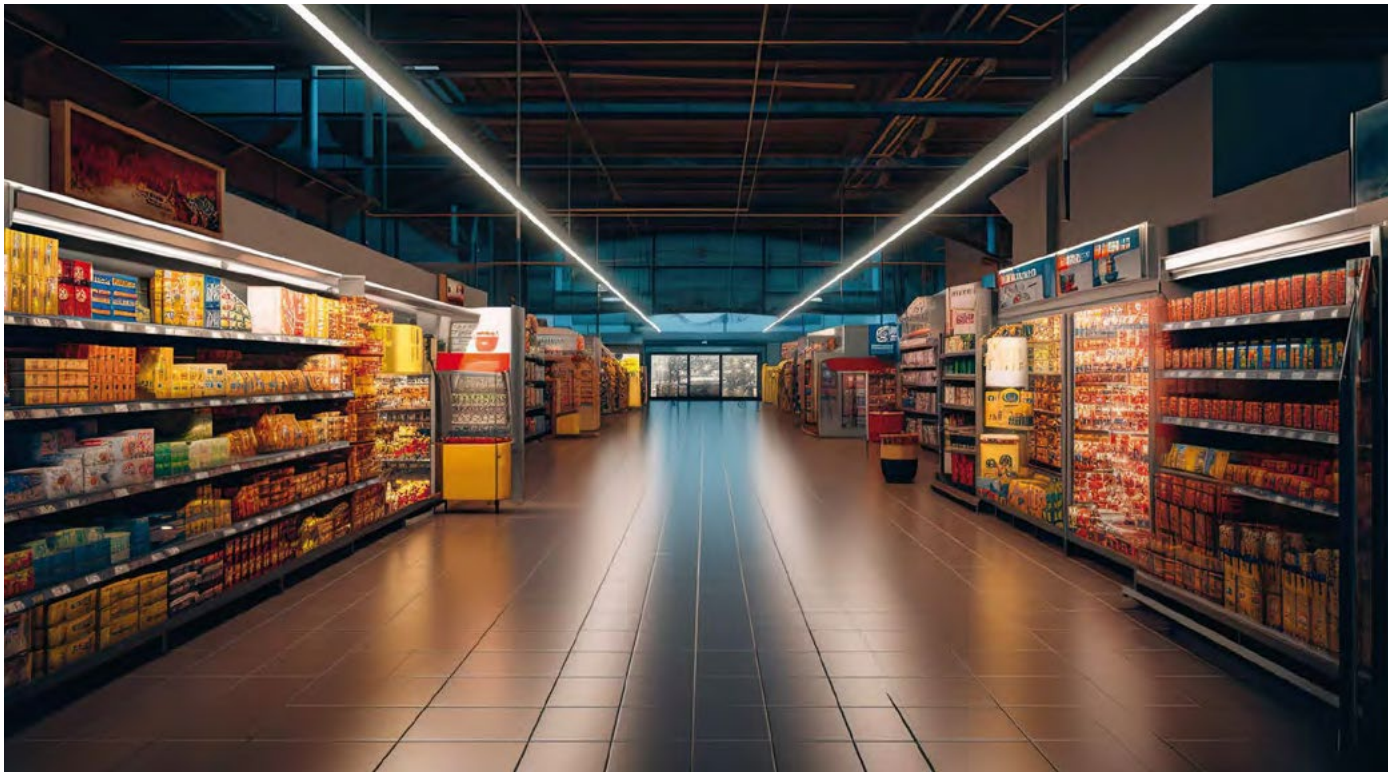

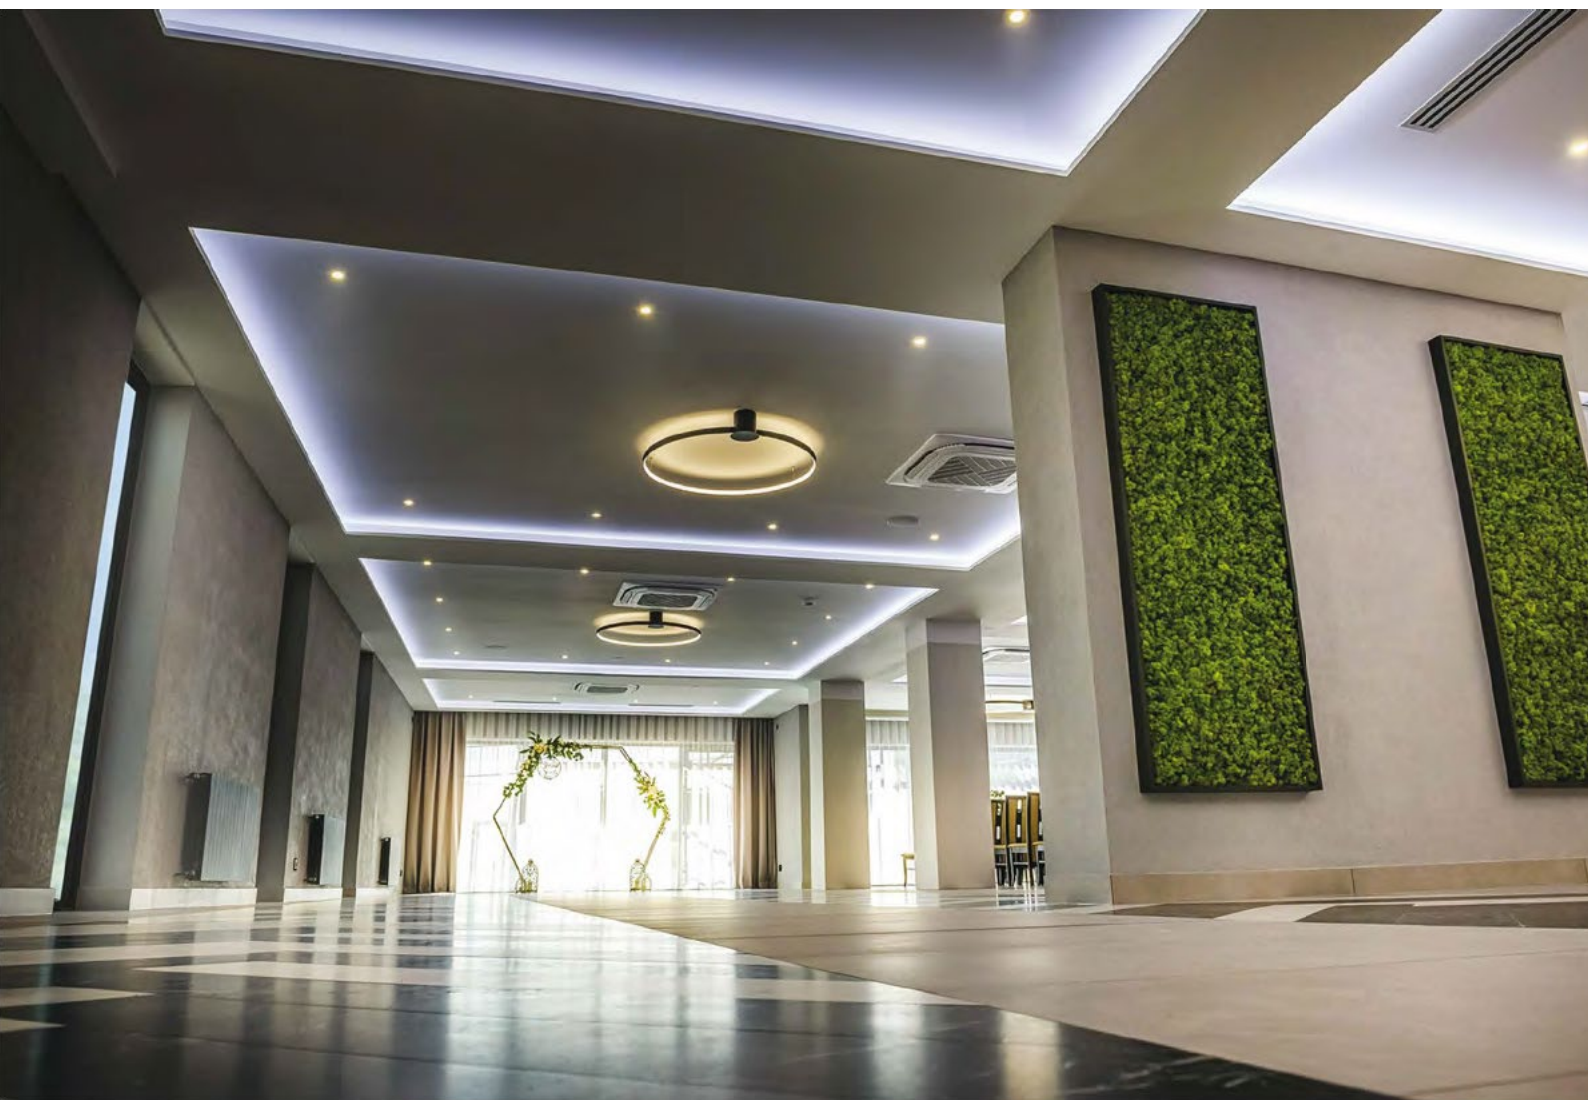












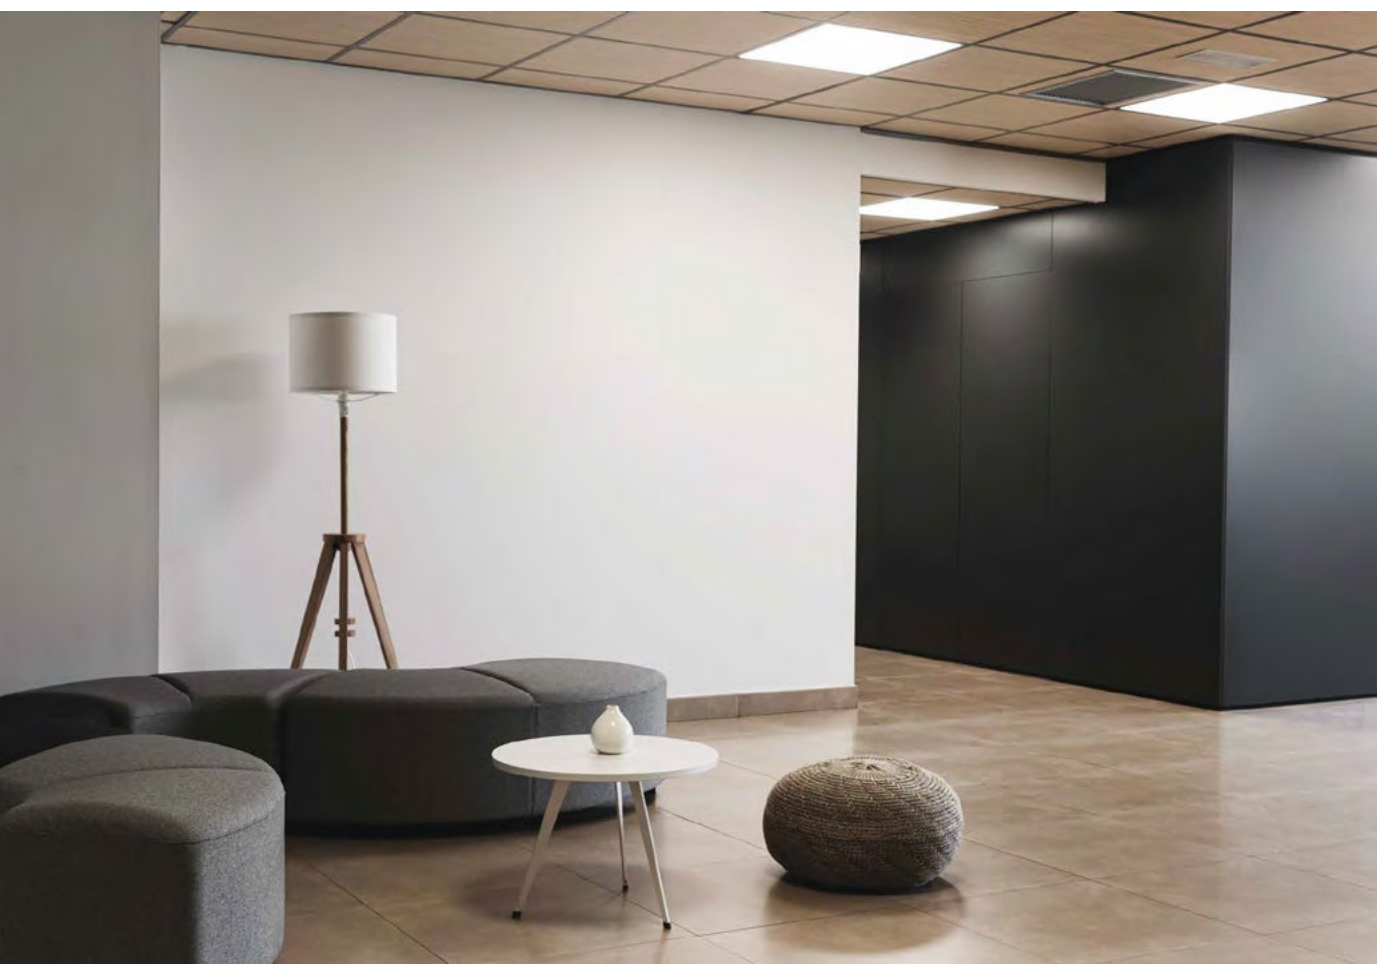



CATEGORY INDEX

FLOODLIGHT



FLOODLIGHT
28



PHOTON
33



LUMINO
39

HIGH BAY



PHANTOM
44



RAIDER
48



ECOBEBAM
50



STREAKBAY
52

CEILING LAMP



LUNAR
55



ACTON
58



PLAFON IP44
60



LINEAR
66

BULKHEADS



PLAFOND
68

TRI-PROOF



RANGER
70



LINKER
72



TRI-PROOF
76

ROAD LUMINAIRES



ELIDA
78



CAMINO
80



FLAMINGO
82



STREETLITE
86

OUTDOOR WALL LUMINAIRE



CUBE/CILINDER
88

LINEAR LAMP



FUSION
90

LED STRIPS



COB
101



EXPERT
105



CLASSIC
108



WATERPROOF
113



ACCESSORIES
117

LED PANELS



DIORA
124



PANEL 2in1
126



PANEL SLIM
130




BACKLIT
132



ACCESSORIES
136

DOWNLIGHT



QUANTUM
140




CALMOS
142




EASY FIX PRO
144



EASY FIX
147



MOLLY
152



FRAMELESS
158


LED LIGHT SOURCE



CERAMIC
162




GLASS
174




FILAMENT
179



BASIC
184



T8 LED
190



ACCESSORIES
192

DECORATIVE




TAZA
198



CAMELIA
200



RIWIA
202



JUTE
204

LED SPOTLIGHTS



PIPE
160



CLASSIC
206



WATERPROOF
212



ROLLO
216



CUBO
218


LED MODULES



EXPERT

220

LED DRIVERS



CONTROLLERS

223



WATERPROOF

229



MULTIPOWER

234

LED PROFILES



LED PROFILES


238

ICONS

	Energy efficiency class		Beam angle		ENEC 18
	Manufacturer issues a X-year warranty for this product.		X-axis angle regulation		Fast connector
	The luminaire is dimmable in the range of X-X V		Angle regulation streetlighting		Product designed for quick installation
	Y-axis angle regulation		Certified by the Polish Institute of Hygiene		Flicker free
	Cube 0-120°		Boke driver		The structural design of this product ensures effective heat dissipation
	LED quantity (lm)		Brushed finish of the downlight fixture		High Colour Rendering Index
	2in1 flush and surface		CCT		IEC protection class I for power supplies
	3CCT controller		Cutting section		IEC protection class II for power supplies
	Type of adhesive tape		The Strip is based on SPI protocol and WS2811 component		IEC protection class III for power supplies
	The colour temperature range of the product falls within X steps of MacAdam formula		DIM TO WARM		Photometric files are available based on photometric tests
	6 lenses		The STEP DIMMABLE function		For indoor use
	Material (housing)		Distance from illuminated surface		For indoor and outdoor use
	Adjustable downlight fixture		Possible installation methods: recessed and surface		IP protection class
	Adjustable bracket		LED type		LED quantity
	LGP		Laminate (thickness)		Stand by
	Luminous efficacy		High quality material which is resistant to yellowing degeneration caused by UV		LED type

	High quality LIFUD branded driver		Power factor		Voltage range and voltage type
	Light sensor		This product is suitable for recessed installation		Surface-mounted installation
	Extended life span of the product		Product vertically and horizontally adjustable		TRIDONIC driver
	Low-UGR		RF 2.4GHz		TUV
	Product with decreased voltage drop		RF 20m		Controlling the light with the use of smartphone via IoT TUYA system
	Product coated with a matt paint finish		RF Remote		Compatible with VARIANTE controllers with the TUYA system
	Ambient temperature suitable for operation		This LED strip produces light from RGB colour palette		Controlling the light with the use of smartphone via IoT TUYA system
	Sensor type		RGB colour palette and additional „W” chip		Type of surface suitable for installation
	Motion detection angle		Mounting hole diameter		ULOR - a percentage value showing the percentage of light sent into the upper hemisphere
	Easy assembly without the need to disassemble the arm		Mounting hole diameter		Ultra slim
	Colour temperature from the range between 3000K and 6500K		High user-safety guaranteed		High resistance to mechanical damage and vandalism
	Narrow Beam Angle		Sanded finish of the downlight fixture		Variante Max A
	Number of on/off cycles		The slim design		Variante voltage AC
	High quality XXXX branded LEDs		Lamp's diameter		Variante voltage AC
	High degree of IP protection		The durability of LED luminaires is determined using the LxBy indicator		IK protection rating
	Twilight sensor				

efficiency 140lm/W CCT version 6 types 30°, 60°, 90°, 120°, T2, T3 waterproof IP66 color temperature 3000K - 5000K tempered glass diffuser






housing:
aluminium
die cast

precise
adjustment
every 15°



FLOODLIGHT FLOODLIGHT




FLOODLIGHT 30W 4200lm

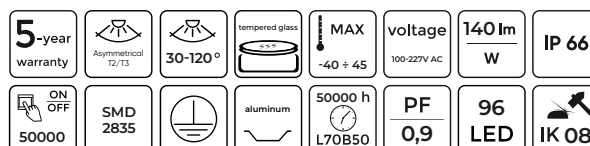

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
200203	Floodlight 30W 4000K 4200lm 120°	120°	30W	4000K	4200lm
200289	Floodlight 30W 4000K 4200lm 90°	90°	30W	4000K	4200lm
200272	Floodlight 30W 4000K 4200lm 60°	60°	30W	4000K	4200lm
200265	Floodlight 30W 4000K 4200lm 30°	120°	30W	4000K	4200lm
202566	Floodlight 30W 4000K 4200lm T2	70°*155°	30W	4000K	4200lm
202559	Floodlight 30W 4000K 4200lm T3	105°*155°	30W	4000K	4200lm
202726	Floodlight 30W CCT 4200lm 120°	120°	30W	3000-5000K	4200lm
202900	Floodlight 30W CCT 4200lm 30°	30°	30W	3000-5000K	4200lm
202733	Floodlight 30W 3000-5000K 4200lm T2	120°	30W	3000-5000K	4200lm



FLOODLIGHT 50W 7000lm

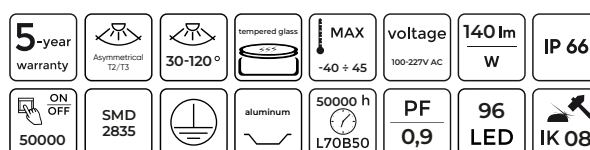

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
200210	Floodlight 50W 4000K 7000lm 120°	120°	50W	4000K	7000lm
200319	Floodlight 50W 4000K 7000lm 90°	90°	50W	4000K	7000lm
200302	Floodlight 50W 4000K 7000lm 60°	60°	50W	4000K	7000lm
200296	Floodlight 50W 4000K 7000lm 30°	30°	50W	4000K	7000lm
202443	Floodlight 50W 4000K 7000lm T2	70°*155°	50W	4000K	7000lm
202542	Floodlight 50W 4000K 7000lm T3	105°*155°	50W	4000K	7000lm
202757	Floodlight 50W CCT 7000lm 120°	120°	50W	3000-5000K	7000lm
202948	Floodlight 50W CCT 7000lm 30°	30°	50W	3000-5000K	7000lm
202740	Floodlight 50W CCT 7000lm T2	70°*155°	50W	3000-5000K	7000lm

FLOODLIGHT 100W 14000lm





5-year warranty	Asymmetrical T2/T3	30-120°	tempered glass	MAX -40 ÷ 45	voltage 100-227V AC	140 lm W	IP 66
ON OFF 50000	SMD 2835		aluminum	50000 h L70B50	PF 0,9	216 LED	IK 08

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
200227	Floodlight 100W 4000K 14000lm 120°	120°	100W	4000K	14000lm
200340	Floodlight 100W 4000K 14000lm 90°	90°	100W	4000K	14000lm
200333	Floodlight 100W 4000K 14000lm 60°	60°	100W	4000K	14000lm
200326	Floodlight 100W 4000K 14000lm 30°	30°	100W	4000K	14000lm
202450	Floodlight 100W 4000K 14000lm T2	70*155°	100W	4000K	14000lm
202528	Floodlight 100W 4000K 14000lm T3	105*155°	100W	4000K	14000lm
202764	Floodlight 100W CCT 14000lm 120°	120°	100W	3000-5000K	14000lm
202986	Floodlight 100W CCT 14000lm 30°	30°	100W	3000-5000K	14000lm
202771	Floodlight 100W CCT 14000lm T2	70*155°	100W	3000-5000K	14000lm

FLOODLIGHT 150W 21000lm





5-year warranty	Asymmetrical T2/T3	30-120°	tempered glass	MAX -40 ÷ 45	voltage 100-227V AC	140 lm W	IP 66
ON OFF 50000	SMD 2835		aluminum	50000 h L70B50	PF 0,9	360 LED	IK 08

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
200647	Floodlight 150W 4000K 21000lm 120°	120°	150W	4000K	21000lm
202610	Floodlight 150W 4000K 21000lm 90°	90°	150W	4000K	21000lm
200654	Floodlight 150W 4000K 21000lm 60°	60°	150W	4000K	21000lm
202603	Floodlight 150W 4000K 21000lm 30°	30°	150W	4000K	21000lm
202580	Floodlight 150W 4000K 21000lm T2	70*155°	150W	4000K	21000lm
202627	Floodlight 150W 4000K 21000lm T3	105*155°	150W	4000K	21000lm
202788	Floodlight 150W CCT 21000lm 120°	120°	150W	3000-5000K	21000lm
203020	Floodlight 150W CCT 21000lm 30°	30°	150W	3000-5000K	21000lm
202795	Floodlight 150W CCT 21000lm T2	70*155°	150W	3000-5000K	21000lm

FLOODLIGHT 200W 28000lm



CO - C180
C90 - C270
200241 [cd/klm]





5-year warranty	Asymmetrical T2/T3	30-120°	tempered glass	MAX -40 ÷ 45	voltage 100-227V AC	140 lm W	IP 66
ON OFF 50000	SMD 2835		aluminum	50000 h L70B50	PF 0,9	360 LED	IK 08

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
200234	Floodlight 200W 4000K 28000lm 120°	120°	200W	4000K	28000lm
200371	Floodlight 200W 4000K 28000lm 90°	90°	200W	4000K	28000lm
200364	Floodlight 200W 4000K 28000lm 60°	60°	200W	4000K	28000lm
200357	Floodlight 200W 4000K 28000lm 30°	30°	200W	4000K	28000lm
202467	Floodlight 200W 4000K 28000lm T2	70°155°	200W	4000K	28000lm
202535	Floodlight 200W 4000K 28000lm T3	105°155°	200W	4000K	28000lm
202801	Floodlight 200W CCT 28000lm 120°	120°	200W	3000-5000K	28000lm
203068	Floodlight 200W CCT 28000lm 30°	30°	200W	3000-5000K	28000lm
202818	Floodlight 200W CCT 28000lm T2	70°155°	200W	3000-5000K	28000lm

FLOODLIGHT 400W 56000lm



CO - C180
C90 - C270
200241 [cd/klm]





5-year warranty	Asymmetrical T2/T3	30-120°	tempered glass	MAX -40 ÷ 45	voltage 100-227V AC	140 lm W	IP 66
ON OFF 50000	SMD 2835		aluminum	50000 h L70B50	PF 0,9	720 LED	IK 08

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
200241	Floodlight 400W 4000K 56000lm 120°	120°	400W	4000K	56000lm
202689	Floodlight 400W 4000K 56000lm 90°	90°	400W	4000K	56000lm
202672	Floodlight 400W 4000K 56000lm 90°	90°	400W	4000K	56000lm
202665	Floodlight 400W 4000K 56000lm 30°	30°	400W	4000K	56000lm
200401	Floodlight 400W 4000K 56000lm T2	T2	400W	4000K	56000lm
202696	Floodlight 400W 4000K 56000lm T3	T3	400W	4000K	56000lm

FLOODLIGHT 600W 84000lm



C0 - C180 C90 - C270 [cd/klm]
200258



5-year warranty

Asymmetrical T2/T3

30-120°

tempered glass

MAX -40 ÷ 45

voltage 100-227V AC

140lm W

IP 66

ON OFF 50000

SMD 2835

aluminum

50000 h L70B50

PF 0,9

720 LED

IK 08




LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
200258	Floodlight 600W 4000K 84000lm 120°	120°	600W	4000K	84000lm
202658	Floodlight 600W 4000K 84000lm 90°	90°	600W	4000K	84000lm
202641	Floodlight 600W 4000K 84000lm 60°	60°	600W	4000K	84000lm
202634	Floodlight 600W 4000K 84000lm 30°	30°	600W	4000K	84000lm
202597	Floodlight 600W 4000K 84000lm T2	T2	600W	4000K	84000lm
202696	Floodlight 600W 4000K 84000lm T3	T3	600W	4000K	84000lm



FLOODLIGHT PHOTON




Floodlight PHOTON 10W 1000lm 4000K



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203495	Floodlight PHOTON 10W 4000K 1000lm	120°	10W	4000K	1000lm




Floodlight PHOTON 20W 2000lm 4000K

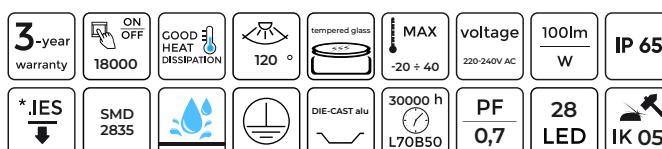

LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203518	Floodlight PHOTON 20W 4000K 2000lm	120°	20W	4000K	2000lm




Floodlight PHOTON 30W 3000lm 4000K

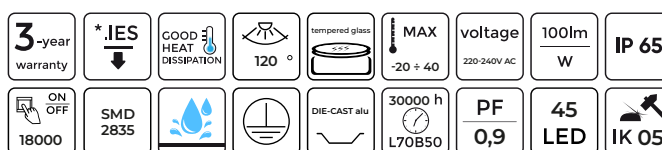

LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203525	Floodlight PHOTON 30W 4000K 3000lm	120°	30W	4000K	3000lm




Floodlight PHOTON 50W 5000lm 4000K



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203549	Floodlight PHOTON 50W 4000K 5000lm	120°	50W	4000K	5000lm




Floodlight PHOTON 100W 10000lm 4000K



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203563	Floodlight PHOTON 100W 4000K 10000lm	120°	100W	4000K	10000lm




Floodlight PHOTON 10W 1000lm 4000K PIR sensor



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203501	Floodlight PHOTON 10W 4000K 1000lm with motion sensor	120°	10W	4000K	1000lm




Floodlight PHOTON 20W 4000K 2000lm with motion sensor



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203488	Floodlight PHOTON 20W 4000K 2000lm with motion sensor	120°	20W	4000K	2000lm




Floodlight PHOTON 30W 4000K 3000lm with motion sensor

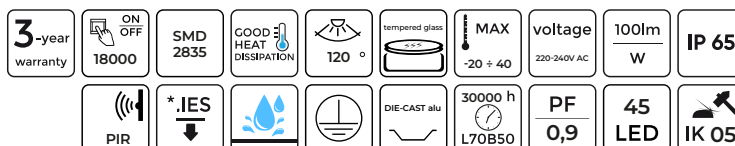

LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203532	Floodlight PHOTON 30W 4000K 3000lm with motion sensor	120°	30W	4000K	3000lm

Floodlight PHOTON 50W 4000K 5000lm with motion sensor





LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203556	Floodlight PHOTON 50W 4000K 5000lm with motion sensor	120°	50W	4000K	5000lm

**Floodlight PHOTON 100W 4000K
10000lm with motion sensor**

3-year warranty	ON OFF 18000	SMD 2835	GOOD HEAT DISSIPATION	120°	tempered glass	MAX -20 ÷ 40	voltage 220-240V AC	100lm W	IP 65
PIR	*.IES				DIE-CAST alu	30000 h L70B50	PF 0,9	150 LED	IK 05





LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203747	Floodlight PHOTON 100W 4000K 10000lm with motion sensor	120°	100W	4000K	10000lm

Floodlight PHOTON 50W AC RGB

3-year warranty	RGB			120°	tempered glass	MAX -20 ÷ 40	voltage 220-240V AC	IP 65
ON OFF 50000					DIE-CAST alu	25000 h L70B50	PF 0,9	70 LED IK 06





LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER
470492	Floodlight PHOTON 50W RGB	120°	50W

**Floodlight PHOTON 10W 800lm
4000K AC PIR**




3-year warranty	ON OFF 50000	GOOD HEAT DISSIPATION	120°	tempered glass	MAX -20 ÷ 40	voltage 220-240V AC	80 lm W	IP 65
PIR	*.IES				DIE-CAST alu	25000 h L70B50	PF 0,7	15 LED IK 06



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
470447	Floodlight PHOTON 10W 800lm 4000K PIR	120°	10W	4000K	800lm




Floodlight PHOTON 10W 6000K 800lm/w 220-240V AC PIR



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
476999	PHOTON 10W 6000K 80lm/w 220-240V AC PIR	120°	10W	6000K	800lm




Floodlight PHOTON 30W 6000K 80lm/w 2400lm AC PIR

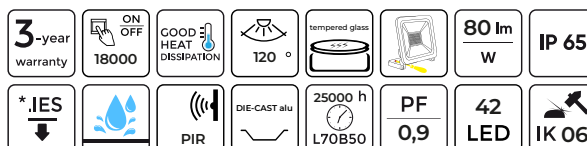

LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
477019	PHOTON 30W 6000K 80lm/w 220-240V AC PIR	120°	30W	6000K	2400lm

Floodlight PHOTON 50W 4000K 4000lm AC PIR



LED line LITE



SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
477026	PHOTON 50W 6000K 80lm/w 220-240V AC PIR	120°	50W	6000K	4000lm



FLOODLIGHT
LUMINO

Floodlight LUMINO 10W 1000lm 4000K

3-year warranty	110°	tempered glass	MAX -20 ÷ +40	voltage 220-240V AC	100lm W	IP 65
SMD LED		DIE-CAST alu	25000 h L70B50	PF 0,9	15 LED	IK 05





LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203280	LUMINO Floodlight 10W 4000K 1000lm	110°	10W	4000K	1000lm

Floodlight LUMINO 20W 2000lm 4000K

3-year warranty	110°	tempered glass	MAX -20 ÷ +40	voltage 220-240V AC	100lm W	IP 65
SMD LED		DIE-CAST alu	25000 h L70B50	PF 0,9	28 LED	IK 05





LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203297	LUMINO Floodlight 20W 4000K 2000lm	110°	20W	4000K	2000lm



Floodlight LUMINO 30W 3000lm 4000K

3-year warranty	110°	tempered glass	MAX -20 ÷ +40	voltage 220-240V AC	100lm W	IP 65
SMD LED		DIE-CAST alu	25000 h L70B50	PF 0,9	28 LED	IK 05





LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203303	LUMINO Floodlight 30W 4000K 3000lm	110°	30W	4000K	3000lm

Floodlight LUMINO 50W 5000lm 4000K




LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203310	LUMINO Floodlight 50W 4000K 5000lm	110°	50W	4000K	5000lm

Floodlight LUMINO 100W 10000lm 4000K


LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203327	LUMINO Floodlight 100W 4000K 10000lm	110°	100W	4000K	10000lm

Floodlight LUMINO 150W 15000lm 4000K


LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203334	LUMINO Floodlight 150W 4000K 15000lm	110°	150W	4000K	15000lm



3-year warranty	110°	tempered glass	MAX -20 ÷ +40	voltage 220-240V AC	100lm W	IP 65
SMD LED		DIE-CAST alu	25000 h L70B50	PF 0,9	56 LED	IK 05

3-year warranty	110°	tempered glass	MAX -20 ÷ +40	voltage 220-240V AC	100lm W	IP 65
SMD LED		DIE-CAST alu	25000 h L70B50	PF 0,9	112 LED	IK 05

3-year warranty	110°	tempered glass	MAX -20 ÷ +40	voltage 220-240V AC	100lm W	IP 65
SMD LED		DIE-CAST alu	25000 h L70B50	PF 0,9	168 LED	IK 05

Floodlight LUMINO 200W 20000lm 4000K

3-year warranty	110°	tempered glass	MAX -20 ÷ 40	voltage 220-240V AC	100lm W	IP 65
SMD LED		DIE-CAST alu	25000 h L70B50	PF 0,9	224 LED	IK 05





LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203341	LUMINO Floodlight 200W 4000K 20000lm	110°	200W	4000K	20000lm

Floodlight LUMINO 10W 1000lm 4000K with motion sensor

 PIR	 3-year warranty	 110°	 tempered glass  MAX -20 ÷ 40	 voltage 220-240V AC	 100lm W	 IP44
 SMD LED	 DIE-CAST alu	 25000 h L70B50	 PF 0,9	 15 LED	 IK 05	





LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203358	LUMINO Floodlight 10W 4000K 1000lm with motion sensor	110°	10W	4000K	1000lm




Floodlight LUMINO 20W 2000lm 4000K with motion sensor

 PIR	 3-year warranty	 110°	 tempered glass  MAX -20 ÷ 40	 voltage 220-240V AC	 100lm W	 IP44
 SMD LED	 DIE-CAST alu	 25000 h L70B50	 PF 0,9	 28 LED	 IK 05	






LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203365	LUMINO Floodlight 20W 4000K 2000lm with motion sensor	110°	20W	4000K	2000lm

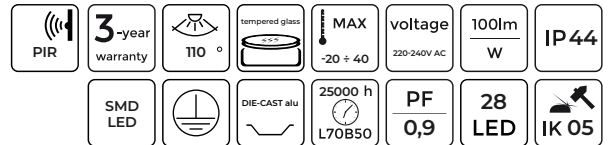Floodlight LUMINO 30W 3000lm 4000K with motion sensor


LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203372	LUMINO Floodlight 30W 4000K 3000lm with motion sensor	110°	30W	4000K	3000lm

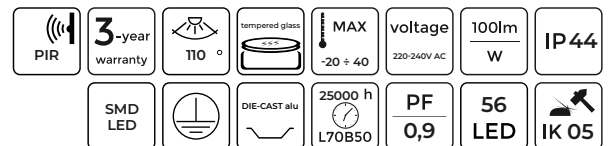Floodlight LUMINO 50W 5000lm 4000K with motion sensor


LED line LITE



SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203389	LUMINO Floodlight 50W 4000K 5000lm with motion sensor	110°	50W	4000K	5000lm



HIGH BAY PHANTOM



High bay PHANTOM 70W 19000lm 4000K 1-10V





5-year warranty	polycarbonate	60-120°	250 mm	MAX -30 ÷ 45	voltage 100-277V AC	190 lm W	IP 65
DALI optionally	SMD 2835	ON OFF 50000		aluminum	100000 h L70B50	PF 0,95	320 LED

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
206588	High bay PHANTOM 190 70W 4000K 13300lm 1-10V	120°	70W	4000K	13300lm
206595	High bay PHANTOM 190 70W 4000K 13300lm 1-10V	90°	70W	4000K	13300lm
206601	High bay PHANTOM 190 70W 4000K 13300lm 1-10V	60°	70W	4000K	13300lm

High bay PHANTOM 100W 19000lm 4000K 1-10V





5-year warranty	polycarbonate	60-120°	250 mm	MAX -30 ÷ 45	voltage 100-277V AC	190 lm W	IP 65
DALI optionally	SMD 2835	ON OFF 50000		aluminum	100000 h L70B50	PF 0,95	320 LED

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203143	High bay PHANTOM 190 100W 4000K 19000lm 1-10V	120°	100W	4000K	19000lm
203150	High bay PHANTOM 190 100W 4000K 19000lm 1-10V	90°	100W	4000K	19000lm
203167	High bay PHANTOM 190 100W 4000K 19000lm 1-10V	60°	100W	4000K	19000lm

High bay PHANTOM 150W 28500lm 4000K 1-10V





5-year warranty	polycarbonate	60-120°	290 mm	MAX -30 ÷ 45	voltage 100-277V AC	190 lm W	IP 65
DALI optionally	SMD 2835	ON OFF 50000		aluminum	100000 h L70B50	PF 0,95	480 LED

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203181	High bay PHANTOM 190 150W 4000K 28500lm 1-10V	90°	150W	4000K	28500lm
203198	High bay PHANTOM 190 150W 4000K 28500lm 1-10V	60°	150W	4000K	28500lm
203174	High bay PHANTOM 190 150W 4000K 28500lm 1-10V	120°	150W	4000K	28500lm



High bay PHANTOM 200W 38000lm 4000K 1-10V



LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203204	High bay PHANTOM 190 200W 4000K 38000lm 1-10V	120°	200W	4000K	38000lm
203211	High bay PHANTOM 190 200W 4000K 38000lm 1-10V	90°	200W	4000K	38000lm
203228	High bay PHANTOM 190 200W 4000K 38000lm 1-10V	60°	200W	4000K	38000lm



High Bay PHANTOM 100W 19000lm 4000K 1-10V with sensor



LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
207004	High bay PHANTOM 190 100W 4000K 19000lm 1-10V with sensor	120°	100W	4000K	19000lm
207011	High bay PHANTOM 190 100W 4000K 19000lm 1-10V with sensor	90°	100W	4000K	19000lm
207028	High bay PHANTOM 190 100W 4000K 19000lm 1-10V with sensor	60°	100W	4000K	19000lm

High bay PHANTOM 150W 28500lm 4000K 1-10V with sensor





LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
207035	High bay PHANTOM 190 150W 4000K 28500lm 1-10V with sensor	120°	150W	4000K	28500lm
207042	High bay PHANTOM 190 150W 4000K 28500lm 1-10V with sensor	90°	150W	4000K	28500lm
207059	High bay PHANTOM 190 150W 4000K 28500lm 1-10V with sensor	60°	150W	4000K	28500lm

**High bay PHANTOM 200W 38000lm
4000K 1-10V with sensor**

5-year warranty	ON OFF 50000	polycarbonate	60-120°	MAX -30 ÷ 45	voltage 100-277V AC	190 lm W	IP 65
DALI optionally	SMD 2835	aluminum	100000 h L70B50	PF 0,95	640 LED		



LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
207066	High Bay PHANTOM 190 200W 4000K 38000lm 1-10V with sensor	120°	200W	4000K	38000lm
207073	High Bay PHANTOM 190 200W 4000K 38000lm 1-10V with sensor	90°	200W	4000K	38000lm
207080	High Bay PHANTOM 190 200W 4000K 38000lm 1-10V with sensor	60°	200W	4000K	38000lm





HIGH BAY
RAIDER

High bay UFO RAIDER 100W 13000lm 4000K



5-year warranty	LED provided by LUMILEDS	120°	250 mm	MAX -40 ÷ 45	voltage 100-277V AC	130lm W	IP 65
SMD 3030	*.IES ↓		aluminum	50000 h L70B50	PF 0,95	144 LED	IK 08





LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
470935	High bay UFO RAIDER 130 100W 130lm/W 4000K	120°	100W	4000K	13000lm

High bay UFO RAIDER 150W 19500lm 4000K



5-year warranty	LED provided by LUMILEDS	120°	250 mm	MAX -40 ÷ 45	voltage 100-277V AC	130lm W	IP 65
*.IES ↓			aluminum	50000 h L70B50	PF 0,95	200 LED	IK 08



LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
470966	High bay UFO RAIDER 150W 130lm/W 4000K	120°	150W	4000K	19500lm
470942	High bay UFO RAIDER 130 150W 130lm/W 4000K	60°	150W	4000K	19500lm

best price
on the market



tempered
glass


beam angle:
110°

power
100 - 200W


waterproof
IP65

HIGH BAY ECOBEBAM

High bay ECOBEAM 100W 10000lm 4000K




3-year warranty	110°	polycarbonate	MAX -40 ÷ 50	voltage 220-240V AC	100 lm W	IP 65
SMD LED		DIE-CAST alu	36000 h L70B50	PF 0,95	IK 08	




LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203396	High ECOBEAM 100W 4000K 10000lm	110°	100W	4000K	10000lm

High bay ECOBEAM 150W 15000lm 4000K




3-year warranty	110°	tempered glass	MAX -20 ÷ 40	voltage 220-240V AC	100 lm W	IP 65
SMD LED		DIE-CAST alu	25000 h L70B50	PF 0,9	IK 05	




LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203402	High bay ECOBEAM 150W 4000K 15000lm	110°	150W	4000K	15000lm

High bay ECOBEAM 200W 20000lm 4000K



3-year warranty	110°	tempered glass	MAX -20 ÷ 40	voltage 220-240V AC	100 lm W	IP 65
SMD LED		DIE-CAST alu	25000 h L70B50	PF 0,9	IK 05	




LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203419	High bay ECOBEAM 200W 4000K 20000lm	110°	200W	4000K	20000lm



HIGH BAY
STREAKBAY

High bay STREAKBAY 50W 10000lm 4000K




3-year warranty	polycarbonate	120X60°	MAX -40 ÷ 50	voltage 220-240V AC	100 lm W	IP 65
SMD LED		DIE-CAST alu	36000 h L70B50	PF 0,95	216 LED	IK 08



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
206748	High bay STREAKBAY 50W 4000K 10000lm	120x60°	50W	4000K	5000lm

High bay STREAKBAY 100W 10000lm 4000K




3-year warranty	polycarbonate	120X60°	MAX -40 ÷ 50	voltage 220-240V AC	100 lm W	IP 65
SMD LED		DIE-CAST alu	36000 h L70B50	PF 0,95	216 LED	IK 08



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
206755	High bay STREAKBAY 100W 4000K 10000lm	120x60°	100W	4000K	10000lm

High bay STREAKBAY 150W 15000lm 4000K




3-year warranty	polycarbonate	120X60°	MAX -40 ÷ 50	voltage 220-240V AC	100 lm W	IP 65
SMD LED		DIE-CAST alu	36000 h L70B50	PF 0,95	216 LED	IK 08



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
206762	High bay STREAKBAY 150W 4000K 15000lm	120x60°	150W	4000K	15000lm

High bay luminaire STREAKBAY 150W
15000lm 4000K



3-year warranty

polycarbonate

120X60°

MAX
-40 ÷ 50

voltage
220-240V AC

100 lm
W

IP 65

SMD LED

DIE-CAST alu

36000 h
L70B50

PF
0,95


216 LED

IK 08





LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
206779	High bay STREAKBAY 200W 4000K 20000lm	120x60°	200W	4000K	20000lm


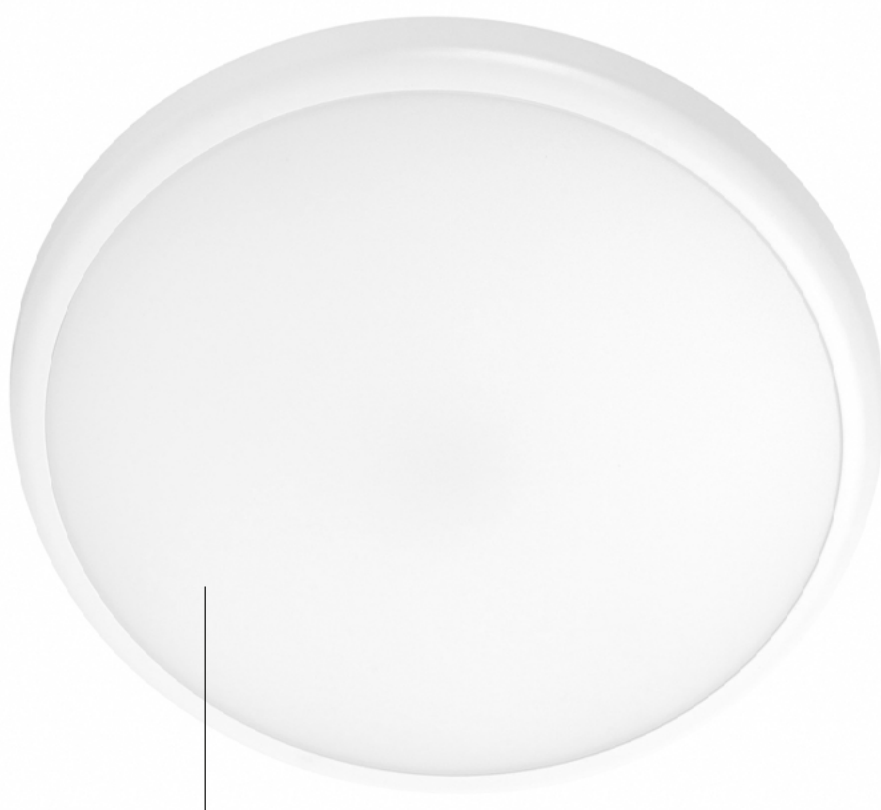


Fast mounting
push & click

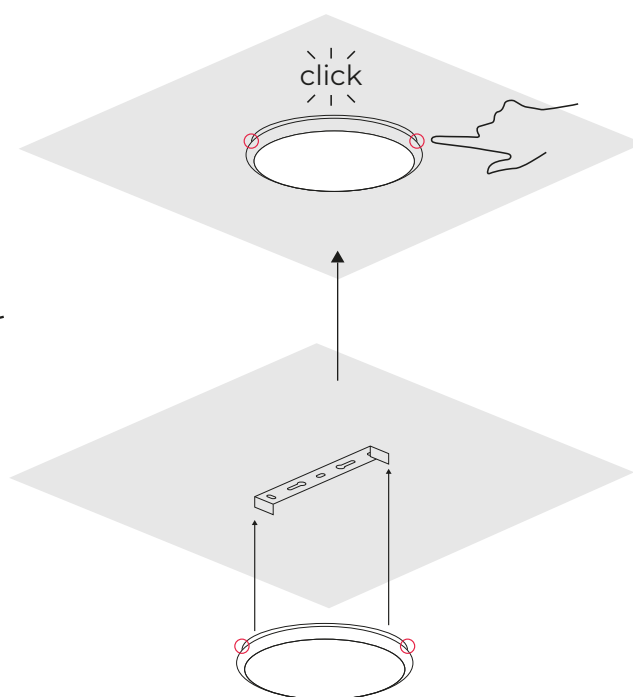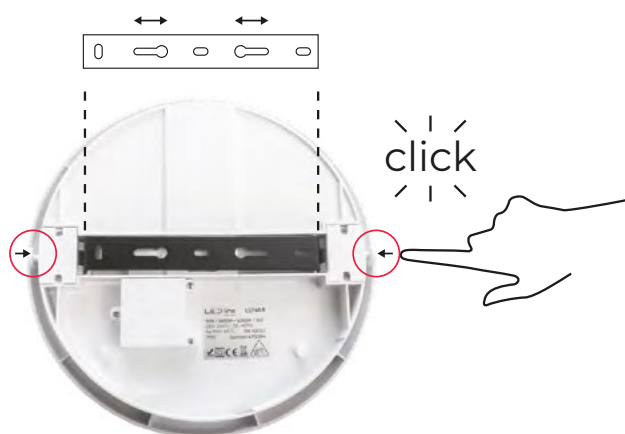


CEILING LAMP
LUNAR

Ceiling lamp LUNAR 16W 1360lm 4000K





LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
470577	Ceiling lamp LUNAR 16W 1360lm 4000K round	120°	16W	4000K	1360lm

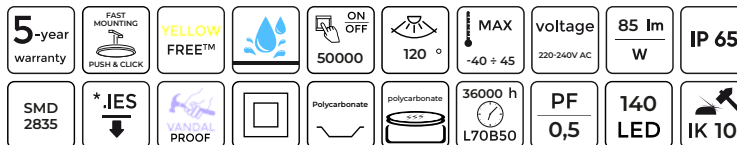


Ceiling lamp LUNAR 22W 1870lm 4000K





LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
470591	Ceiling lamp LUNAR 22W 1870lm 4000K round	120°	22W	4000K	1870lm

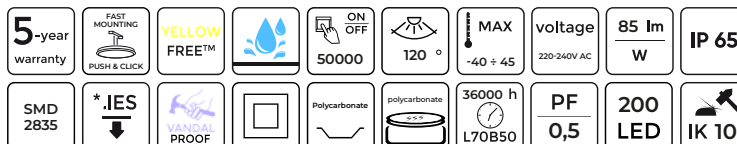


Ceiling lamp LUNAR 16W 1360lm 4000K Motion sensor



LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
470584	Ceiling lamp LUNAR 16W 1360lm 4000K Motion sensor	120°	16W	4000K	1360lm

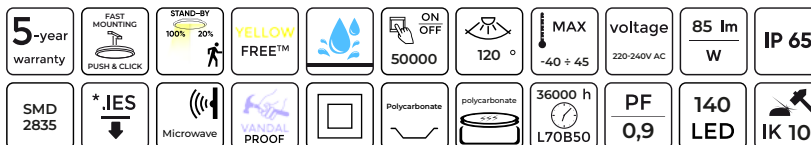

Ceiling lamp LUNAR 22W
1870lm 4000K Motion sensor



5-year warranty

FAST MOUNTING
PUSH & CLICK

STAND-BY
100% 20%

YELLOW FREE™

ON OFF
50000

120°

MAX
-40 ÷ 45

voltage
220-240V AC

85 lm
W

IP 65

SMD 2835

* IES
↓

Microwave

WASHABLE PROOF



Polycarbonate

polycarbonate

36000 h
L70B50

PF
0,9

200 LED



LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
470607	Ceiling lamp LUNAR 22W 1870lm 4000K Motion sensor	120°	22W	4000K	1870lm

microvawe motion
sensor 360°, 8m

indoor and
outdoor use

IP54

3000K, 4000K
versions




CEILING LAMP **ACTON**

safety wire

click

„click” latches




Ceiling lamp ACTON IP54 round

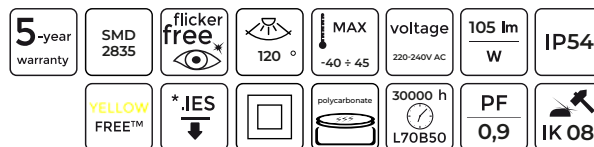

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
201095	Ceiling lamp ACTON 18W 1900lm 3000K IP54 round	120°	18W	3000K	1900lm
201101	Ceiling lamp ACTON 18W 1900lm 3000K IP54 round with motion sensor	120°	18W	3000K	1900lm
201118	Ceiling lamp ACTON 18W 2000lm 4000K IP54 round	120°	18W	4000K	2000lm
201125	Ceiling lamp ACTON 18W 2000lm 4000K IP54 round with motion sensor	120°	18W	4000K	2000lm
201132	Ceiling lamp ACTON 24W 2600lm 4000K IP54 round	120°	24W	4000K	2600lm
201149	Ceiling lamp ACTON 24W 2600lm 4000K IP54 round with motion sensor	120°	24W	4000K	2600lm

Ceiling lamp ACTON IP54 square

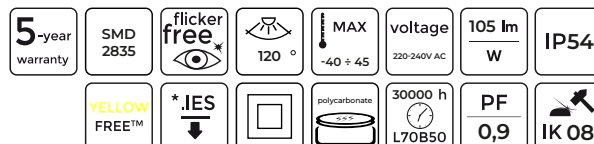

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
201156	Ceiling lamp ACTON 18W 1900lm 3000K IP54 square	120°	18W	3000K	1900lm
201163	Ceiling lamp ACTON 18W 1900lm 3000K IP54 square with motion sensor	120°	18W	3000K	1900lm
201170	Ceiling lamp ACTON 18W 2000lm 4000K IP54 square	120°	18W	4000K	2000lm
201187	Ceiling lamp ACTON 18W 2000lm 4000K IP54 square with motion sensor	120°	18W	4000K	2000lm





CEILING LAMP

PLAFON IP44

**Ceiling lamp PLAFON IP44 12W
900lm 3000K**

3-year warranty	260 mm	120°	voltage 220-240V AC	75 lm W	IP44
SMD 2835	flicker free	MAX -20 ÷ 40		30000 h L70B50	14 LED





LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
201354	Ceiling lamp PLAFON 12W 3000K 900lm IP44	120°	12W	3000K	900lm

**Ceiling lamp PLAFON IP44 12W
900lm 3000K with motion sensor**

3-year warranty	flicker free	120°	voltage 220-240V AC	75 lm W	IP44
	Microwave	MAX -20 ÷ 40		30000 h L70B50	14 LED





LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
201361	Ceiling lamp PLAFON 12W 3000K 900lm IP44 with motion sensor	120°	12W	3000K	900lm

**Ceiling lamp PLAFON IP44 12W
960lm 4000K**




3-year warranty	260 mm	120°	voltage 220-240V AC	80 lm W	IP44
SMD 2835	flicker free	MAX -20 ÷ 40		30000 h L70B50	14 LED



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
201378	Ceiling lamp PLAFON 12W 4000K 960lm IP44	120°	12W	4000K	960lm




Ceiling lamp PLAFON IP44 12W 9600lm 4000K with motion sensor

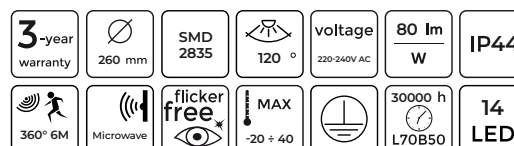

LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
201385	Ceiling lamp PLAFON 12W 4000K 960lm IP44 with motion sensor	120°	12W	4000K	960lm




Ceiling lamp PLAFON IP44 18W 1450lm 3000K



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
201392	Ceiling lamp PLAFON 18W 3000K 1450lm IP44	120°	18W	3000K	1450lm




Ceiling lamp PLAFON IP44 18W 1450lm 3000K with motion sensor

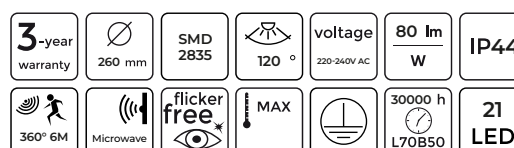

LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
201408	Ceiling lamp PLAFON 18W 3000K 1450lm IP44 with motion sensor	120°	18W	3000K	1450lm




**Ceiling lamp PLAFON IP44 18W
1550lm 3000K**



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
201415	Ceiling lamp PLAFON 18W 4000K 1550lm IP44	120°	18W	4000K	1550lm




**Ceiling lamp PLAFON IP44 18W
1550lm 3000K**

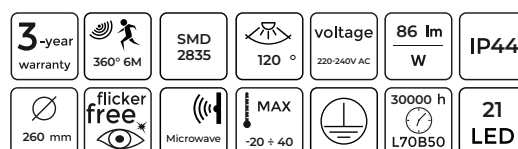

LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
201422	Ceiling lamp PLAFON 18W 4000K 1550lm IP44 with motion sensor	120°	18W	4000K	1550lm




**Ceiling lamp PLAFON IP44 24W
1950lm 3000K**

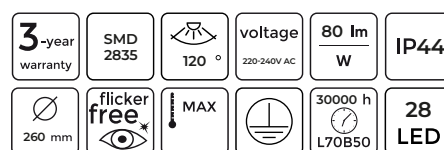

LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
201439	Ceiling lamp PLAFON 24W 4000K 1950lm IP44	120°	24W	4000K	1950lm

Ceiling lamp PLAFON IP44 24W
1550lm 3000K with motion sensor

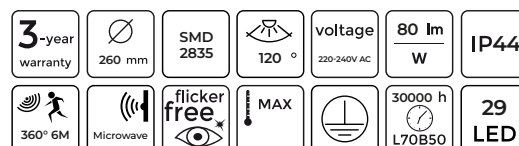


LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
201446	Ceiling lamp PLAFON 24W 4000K 1950lm IP44 with motion sensor	120°	24W	4000K	1950lm




CEILING LAMP
LINEAR

Ceiling lamp LINEAR 40W 5200lm 4000K



5-year warranty	SMD 2839	120°	polycarbonate	130 lm W	IP20
PF 0,95	ON OFF 50000	PVC	50000 h L70B50	288 LED	



LED line PRIME



SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
477682	LINEAR 40W 4000K 130lm/w 200-240V AC	120°	40W	4000K	5200lm



BULKHEADS
PLAFOND

Ceiling lamp PLAFOND 12W 960lm 4000K

3-year warranty	160°	voltage 220-240V AC	100 lm W	IP20
SMD 2839	ON OFF 50000	260 mm	50000 h L70B50	15 LED




LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
470669	LED PLAFOND 12W 4000K 960lm 220-240V	160°	12W	4000K	960lm

Ceiling lamp BULKHEAD 4000K SMD5730 Oval

3-year warranty	SMD 5730	*.IES	120°	polycarbonate	voltage 220-240V AC	70 lm W	IP54
ON OFF 50000	PF 0,5	MAX -40 ÷ 45	50000 h L70B50	14 LED			



LED line LITE



SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
244971	BULKHEAD 6W 4000K 220-240V oval SMD5730	120°	6W	4000K	420lm
245497	BULKHEAD 12W 4000K 220-240V oval SMD5730	120°	12W	4000K	840lm



TRI-PROOF RANGER




TRI-PROOF RANGER C lamp
40W 5600lm 4000K IP66



LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
471109	RANGER C TRI-PROOF lamp 40W 4000K 140lm/W IP66	120°	40W	4000K	5600lm


TRI-PROOF RANGER C lamp
40W 5600lm 4000K IP66



LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
471116	RANGER C TRI-PROOF lamp 40W 4000K 140lm/W IP66 1-10V	120°	40W	4000K	5600lm

TRI-PROOF RANGER C 40W
6800lm 4000K 1-10V



LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
201262	RANGER C 40W 4000K 170 lm/W 1-10V	120°	40W	4000K	6800lm



through - connection



efficiency
150lm/W

L70B50
100,000h

IK08
polycarbonate
diffuser

waterproof
IP65


black version



many variants 21-80W,
4000-5000K

TRI-PROOF LINKER




Tri-proof LINKER 21W 3150lm 4000K IP65 60cm

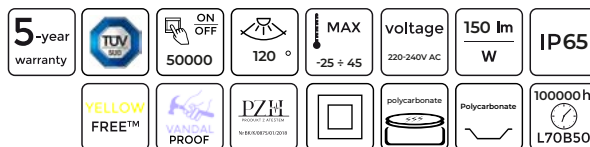

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
479587	LINKER tri-proof 21W 4000K 150lm/W 220-240V IP65	120°	21W	4000K	3150lm



Tri-proof LINKER 30W 4500lm 4000K IP65



LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203709	LINKER tri-proof 30W 4000K 150lm/W 220-240V IP65	120°	30W	4000K	4500lm




Tri-proof LINKER 40W 6000lm 4000K IP65

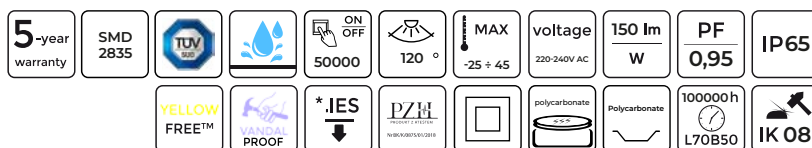

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
479594	LINKER tri-proof 40W 4000K 150lm/W 220-240V IP65	120°	40W	4000K	6000lm



Tri-proof LINKER 40W 6000lm 5000K IP65

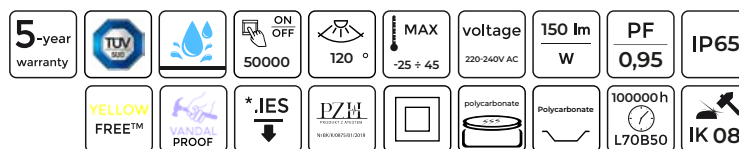

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
201279	LINKER tri-proof 40W 5000K 150lm/W IP65	120°	40W	5000K	6000lm




Tri-proof LINKER 40W 6000lm 4000K IP65 black



LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203754	LINKER tri-proof 40W 4000K 150lm/W IP65 black	120°	40W	4000K	6000lm

Tri-proof LINKER 30W 4500lm 4000K IP65



LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203709	LINKER tri-proof 30W 4000K 150lm/W IP65	120°	30W	4000K	4500lm

Tri-proof LINKER 80W
12000lm 4000K IP65

5-year warranty

50000

120°

MAX
-25 + 45

voltage
220-240V AC

150 lm
W

PF
0,95

IP 65

YELLOW
FREE™

* IES
↓



ANTI-VANDAL
PROOF

PZH
14.06.15/05.01.2019

polycarbonate

polycarbonate

100000 h
L70B50



LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
201057	LINKER tri-proof 80W 4000K 150lm/W IP65	120°	80W	4000K	12000lm



TRI-PROOF
TRI-PROOF

TRI-PROOF 4000K IP65
with motion sensor



3-year warranty

FAST CONNECTOR

flicker free

120°

MAX
-20 ÷ 40

voltage
220-240V AC

120 lm
W

PF
0,9

IP 65

sensor


ON OFF
20000

polycarbonate

polycarbonate


35000 h
L70B50

IK 08




LED line LITE


SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
477606	TRI-PROOF 30W 4000K 650mm	120°	30W	4000K	3600lm
477644	TRI-PROOF 30W 4000K 650mm PIR	120°	30W	4000K	3600lm
477613	TRI-PROOF 40W 4000K 1250mm	120°	40W	4000K	4800lm
477651	TRI-PROOF 40W 4000K 1250mm PIR	120°	40W	4000K	4800lm
477620	TRI-PROOF 70W 4000K 1550mm	120°	70W	4000K	8400lm
477637	TRI-PROOF 90W 4000K 1550mm	120°	90W	4000K	10800lm



477606
477644



477613
477651



477620
477637





ROAD LUMINAIRE
ELIDA

Street light ELIDA 40W IP65



5-year warranty

SMD LED 2835

Asymmetrical T3

MAX -40 ÷ 50

voltage 100-277V

120 lm W

PF 0,95

IP 65

ULOR 0%


tempered glass

aluminum

64 LED


50000 h L70B50

IK 08




LED line PRIME



SYMBOL	NAME	POWER	CCT	LUMINOUS
475473	Elida 40W 4000K 120lm/W 100-277V AC T3	40W	4000K	4800lm
478498	Elida 70W 4000K 120lm/W 100-277V AC T3	70W	4000K	8400lm



475473



478498

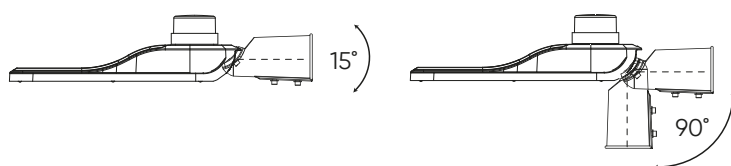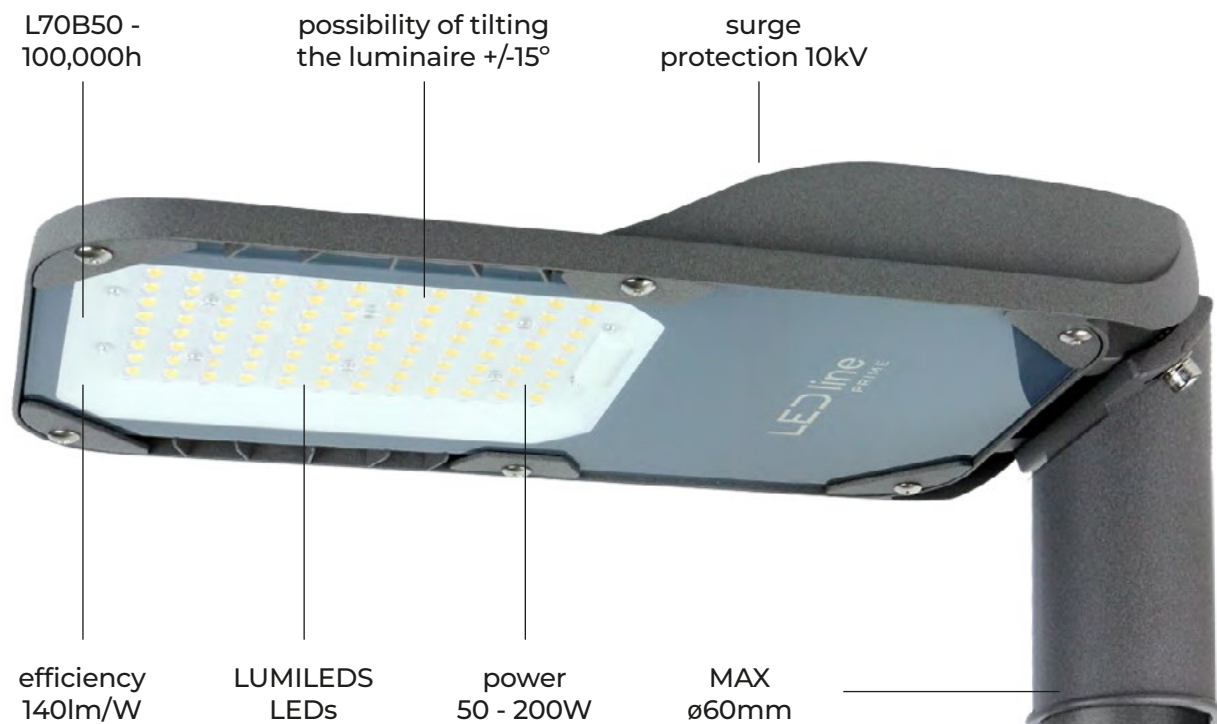


ROAD LUMINAIRE **CAMINO**

Road luminaire CAMINO IP66




5-year warranty	150x110°	MAX -40 ÷ 50	voltage 220-240V AC	140 lm W	PF 0,9	IP 66
LUMILEDS 2835	ULOR 0%		tempered glass	aluminum	100000h L70B50	IK 08




LED line PRIME


SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203105	Road luminaire CAMINO 50W 4000K 7000lm	150 x 110°	50W	4000K	7000lm
206564	Road luminaire CAMINO 50W 3000K 6500lm	150 x 110°	50W	3000K	6500lm
203112	Road luminaire CAMINO 100W 4000K 14000lm	150 x 110°	100W	4000K	14000lm
206571	Road luminaire CAMINO 100W 3000K 13000lm	150 x 110°	100W	3000K	13000lm
203129	Road luminaire CAMINO 150W 4000K 21000lm	150 x 110°	150W	4000K	21000lm
203136	Road luminaire CAMINO 200W 4000K 28000lm	150 x 110°	200W	4000K	28000lm




203105
206564



203112
206571



203129



203136

lightweight
construction


power
30 - 100W

easy mounting on
pole or wall

possibility of tilting
the luminaire +/-15°

minimalistic
design

ø60mm

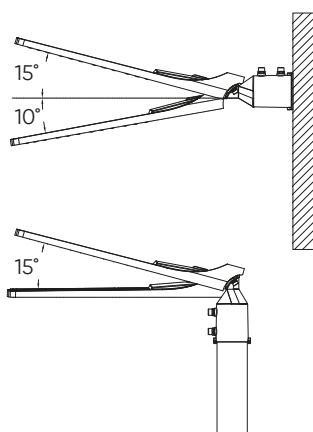



twilight sensor
available

ROAD LUMINAIRE FLAMINGO




black color
available

Road luminaire FLAMINGO grey

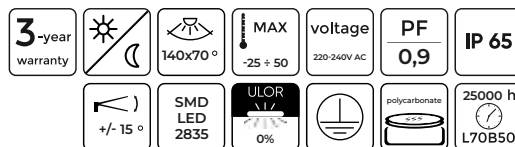


LED line LITE


SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203785	Road luminaire FLAMINGO 30W 4000K 3000lm grey	140 x 70°	30W	4000K	3000lm
206960	Road luminaire FLAMINGO 30W 4000K 3000lm with twilight sensor grey	140 x 70°	30W	4000K	3000lm
203792	Road luminaire FLAMINGO 50W 4000K 5000lm grey	140 x 70°	50W	4000K	5000lm
206977	Road luminaire FLAMINGO 50W 4000K 5000lm with twilight sensor grey	140 x 70°	50W	4000K	5000lm
203808	Road luminaire FLAMINGO 100W 4000K 10000lm grey	140 x 70°	100W	4000K	10000lm
206984	Road luminaire FLAMINGO 100W 4000K 10000lm with twilight sensor grey	140 x 70°	100W	4000K	10000lm



203785
203815
206960



203792
203822
206977



203839
203808
206984

Road luminaire FLAMINGO black

3-year warranty

 140x70°

 MAX
-25 + 50

 voltage
220-240V AC

 PF
0,9

 IP 65



 +/- 15°

 SMD LED

 ULOR
0%


 polycarbonate

 25000 h
L70B50




LED line LITE


SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203815	Road luminaire FLAMINGO 30W 4000K 3000lm black	140 x 70°	30W	4000K	3000lm
203822	Road luminaire FLAMINGO 50W 4000K 5000lm black	140 x 70°	50W	4000K	5000lm
203839	Road luminaire FLAMINGO 100W 4000K 10000lm black	140 x 70°	100W	4000K	10000lm



203815



203822



203839




ROAD LUMINAIRE
STREETLITE

Road luminaire STREETLITE grey




LED line LITE


3-year warranty	SMD LED 2835	130x75°	MAX -40 ÷ 50°C	voltage 220-240V AC	100 lm W	IP 65
ULOR 0%			aluminum	polycarbonate	PF 0,9	36000 h L70B50




SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
201064	Road luminaire STREETLITE 50W 4000K 5000lm grey	130 x 75°	50W	4000K	5000lm
201071	Road luminaire STREETLITE 100W 4000K 10000lm grey	130 x 75°	100W	4000K	10000lm
201088	Road luminaire STREETLITE 150W 4000K 15000lm grey	130 x 75°	150W	4000K	15000lm



201064



201071




201088

Road luminaire STREETLITE black




LED line LITE


3-year warranty	SMD LED 2835	130x75°	MAX -40 ÷ 50°C	voltage 220-240V AC	100 lm W	IP 65
ULOR 0%			aluminum	polycarbonate	PF 0,9	36000 h L70B50



SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203716	Road luminaire STREETLITE 50W 4000K 5000lm black	130 x 75°	50W	4000K	5000lm
203723	Road luminaire STREETLITE 100W 4000K 10000lm black	130 x 75°	100W	4000K	10000lm



203716





203723



OUTDOOR WALL LUMINAIRE
CUBE
CILINDER


Outdoor wall lamp CUBE 2x3W IP54

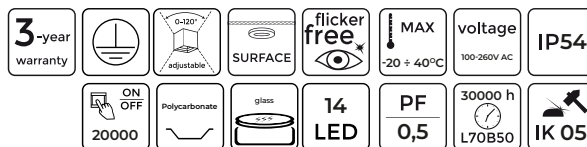

LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
478146	CUBE wall lamp 2x3W 3000K 450lm black	0 ÷ 120 °	2x3W	3000K	450lm
478153	CUBE wall lamp 2x3W 3000K 450lm white	0 ÷ 120 °	2x3W	3000K	450lm
478160	CUBE wall lamp 2x3W 3000K 450lm grey	0 ÷ 120 °	2x3W	3000K	450lm
478177	CUBE wall lamp 2x3W 4000K 450lm black	0 ÷ 120 °	2x3W	4000K	450lm
478184	CUBE wall lamp 2x3W 4000K 450lm white	0 ÷ 120 °	2x3W	4000K	450lm
478191	CUBE wall lamp 2x3W 4000K 450lm grey	0 ÷ 120 °	2x3W	4000K	450lm

Outdoor wall lamp CILINDER 2x3W IP54

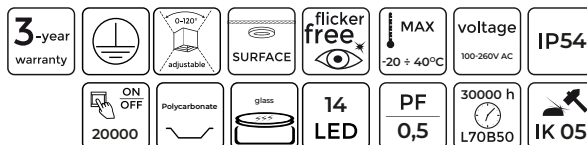




LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
475510	CILINDER wall lamp 2x3W 3000K 450lm black	0 ÷ 120 °	2x3W	3000K	450lm
475527	CILINDER wall lamp 2x3W 3000K 450lm white	0 ÷ 120 °	2x3W	3000K	450lm
475534	CILINDER wall lamp 2x3W 3000K 450lm grey	0 ÷ 120 °	2x3W	3000K	450lm
475541	CILINDER wall lamp 2x3W 4000K 450lm black	0 ÷ 120 °	2x3W	4000K	450lm
475558	CILINDER wall lamp 2x3W 4000K 450lm white	0 ÷ 120 °	2x3W	4000K	450lm
475565	CILINDER wall lamp 2x3W 4000K 450lm grey	0 ÷ 120 °	2x3W	4000K	450lm




LINEAR LAMP
FUSION



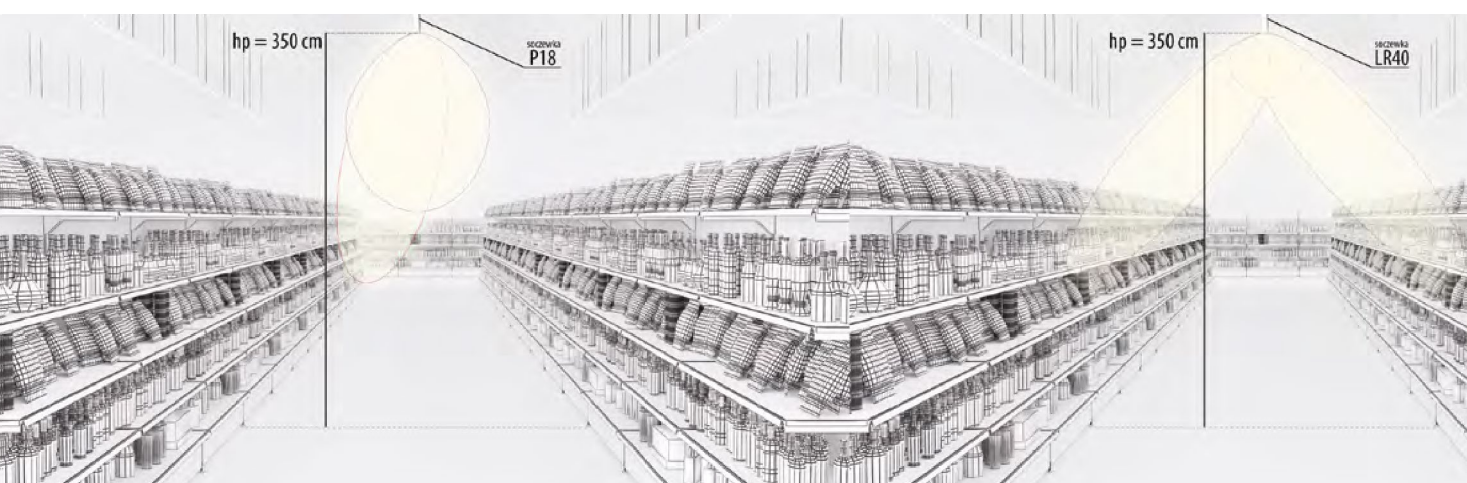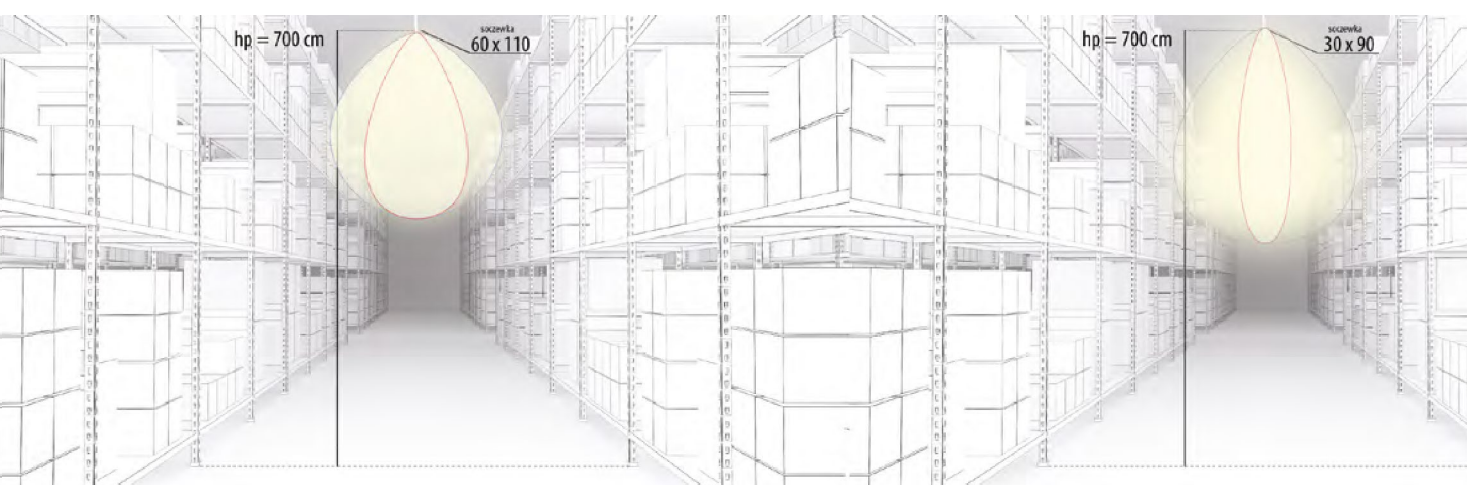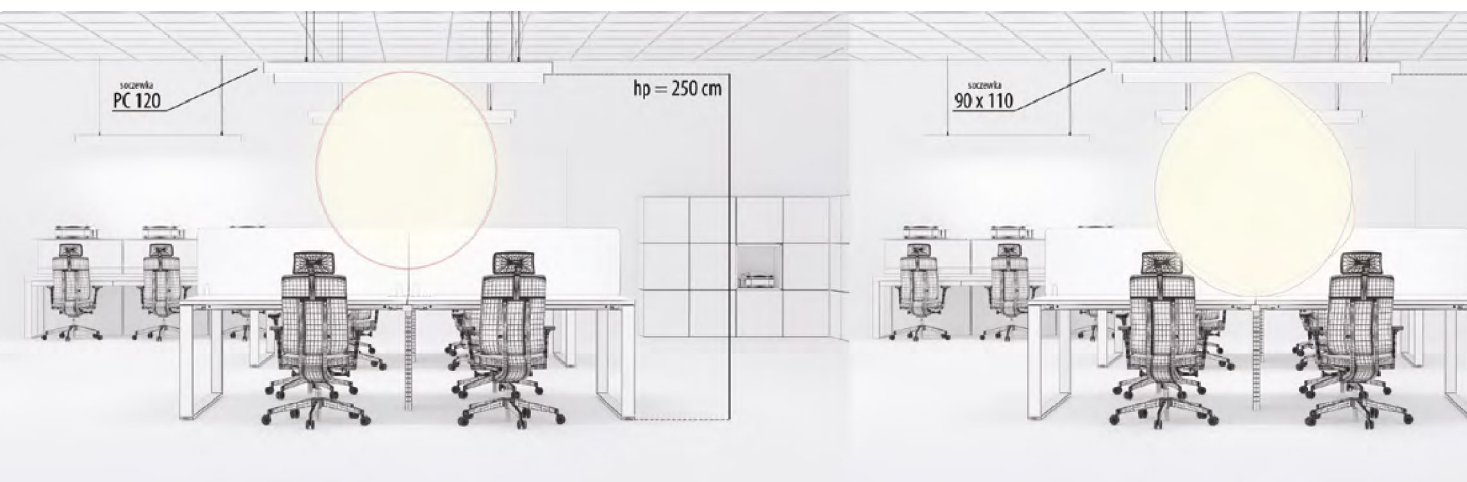



60 - 150cm
luminaire length



anti-glare shield
UGR<19



angle connector
90-270°




max. 60m






- white
- grey
- black




tool-free
connection

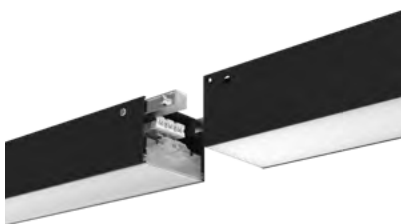

create various
shapes



Linear lamp FUSION 20W 60cm






475466



LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
475466	FUSION linear lamp 20W 4000K 2600lm PC Cover 120° black	120°	20W	4000K	2600lm
475480	FUSION linear lamp 20W 4000K 2600lm 30°*90° black	30°*90°	20W	4000K	2600lm
475497	FUSION linear lamp 20W 4000K 2600lm 60°*110° black	60°*110°	20W	4000K	2600lm
475503	FUSION linear lamp 20W 4000K 2600lm 90°*110° black	90°*110°	20W	4000K	2600lm
475602	FUSION linear lamp 20W 4000K 2600lm 120°*120° black	120°*120°	20W	4000K	2600lm
475619	FUSION linear lamp 20W 4000K 2600lm LR40 black	LR40	20W	4000K	2600lm
475626	FUSION linear lamp 20W 4000K 2600lm P18 black	P18	20W	4000K	2600lm

Linear lamp FUSION 20W 0-10V 60cm

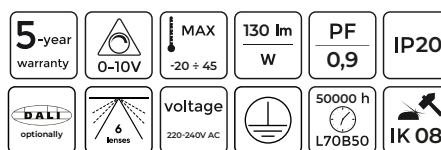




475633



LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
475633	FUSION linear lamp 20W 4000K 2600lm 0-10V PC Cover 120° black	120°	20W	4000K	2600lm
475640	FUSION linear lamp 20W 4000K 2600lm 0-10V 30°*90° black	30°*90°	20W	4000K	2600lm
475657	FUSION linear lamp 20W 4000K 2600lm 0-10V 60°*110° black	60°*110°	20W	4000K	2600lm
475664	FUSION linear lamp 20W 4000K 2600lm 0-10V 90°*110° black	90°*110°	20W	4000K	2600lm
475701	FUSION linear lamp 20W 4000K 2600lm 0-10V 120°*120° black	120°*120°	20W	4000K	2600lm
475718	FUSION linear lamp 20W 4000K 2600lm 0-10V LR40 black	LR40	20W	4000K	2600lm
475725	FUSION linear lamp 20W 4000K 2600lm 0-10V P18 black	P18	20W	4000K	2600lm

Linear lamp FUSION 40W 120cm






475732

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
475732	FUSION linear lamp 40W 4000K 5200lm PC Cover 120° black	120°	40W	4000K	5200lm
475749	FUSION linear lamp 40W 4000K 5200lm 30°*90° black	30°*90°	40W	4000K	5200lm
475756	FUSION linear lamp 40W 4000K 5200lm 60°*110° black	60°*110°	40W	4000K	5200lm
475763	FUSION linear lamp 40W 4000K 5200lm 90°*110° black	90°*110°	40W	4000K	5200lm
475800	FUSION linear lamp 40W 4000K 5200lm 120°*120° black	120°*120°	40W	4000K	5200lm
475817	FUSION linear lamp 40W 4000K 5200lm LR40 black	LR40	40W	4000K	5200lm
475824	FUSION linear lamp 40W 4000K 5200lm P18 black	P18	40W	4000K	5200lm

Linear lamp FUSION 40W 0-10V 120cm


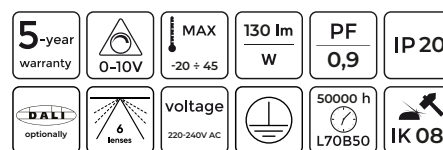



475831

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
475831	FUSION linear lamp 40W 4000K 5200lm 0-10V PC Cover 120° black	120°	40W	4000K	5200lm
475848	FUSION linear lamp 40W 4000K 5200lm 0-10V 30°*90° black	30°*90°	40W	4000K	5200lm
475855	FUSION linear lamp 40W 4000K 5200lm 0-10V 60°*110° black	60°*110°	40W	4000K	5200lm
475862	FUSION linear lamp 40W 4000K 5200lm 0-10V 90°*110° black	90°*110°	40W	4000K	5200lm
475909	FUSION linear lamp 40W 4000K 5200lm 0-10V 120°*120° black	120°*120°	40W	4000K	5200lm
475916	FUSION linear lamp 40W 4000K 5200lm 0-10V LR40 black	LR40	40W	4000K	5200lm
475923	FUSION linear lamp 40W 4000K 5200lm 0-10V P18 black	P18	40W	4000K	5200lm




Linear lamp FUSION 60W 145cm



LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
475930	FUSION linear lamp 60W 4000K 7800lm PC Cover 120° black	120°	60W	4000K	7800lm
475947	FUSION linear lamp 60W 4000K 7800lm 30°90° black	30°90°	60W	4000K	7800lm
475954	FUSION linear lamp 60W 4000K 7800lm 60°110° black	60°110°	60W	4000K	7800lm
475961	FUSION linear lamp 60W 4000K 7800lm 90°110° black	90°110°	60W	4000K	7800lm
476012	FUSION linear lamp 60W 4000K 7800lm 120°120° black	120°120°	60W	4000K	7800lm
476029	FUSION linear lamp 60W 4000K 7800lm LR40 black	LR40	60W	4000K	7800lm
478962	FUSION linear lamp 60W 4000K 7800lm P18 black	P18	60W	4000K	7800lm


Linear lamp FUSION 60W 0-10V 145cm




LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
478979	FUSION linear lamp 60W 4000K 7800lm 0-10V PC Cover 120° black	120°	60W	4000K	7800lm
478986	FUSION linear lamp 60W 4000K 7800lm 0-10V 30°90° black	30°90°	60W	4000K	7800lm
478993	FUSION linear lamp 60W 4000K 7800lm 0-10V 60°110° black	60°110°	60W	4000K	7800lm
479006	FUSION linear lamp 60W 4000K 7800lm 0-10V 90°110° black	90°110°	60W	4000K	7800lm
479662	FUSION linear lamp 60W 4000K 7800lm 0-10V 120°120° black	120°120°	60W	4000K	7800lm
479679	FUSION linear lamp 60W 4000K 7800lm 0-10V LR40 black	LR40	60W	4000K	7800lm
479686	FUSION linear lamp 60W 4000K 7800lm 0-10V P18 black	P18	60W	4000K	7800lm

Linear lamp FUSION 20W 60cm



5-year warranty	MAX -20 ÷ 45	130 lm W	PF 0,9	IP 20
DALI optionally	6 lenses	voltage 220-240V AC	50000 h L70B50	




203259


LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203259	FUSION linear lamp 20W 4000K 2600lm PC Cover 120° white	120°	20W	4000K	2600lm
203983	FUSION linear lamp 20W 4000K 2600lm 30°*90° white	30°*90°	20W	4000K	2600lm
203990	FUSION linear lamp 20W 4000K 2600lm 60°*110° white	60°*110°	20W	4000K	2600lm
204003	FUSION linear lamp 20W 4000K 2600lm 90°*110° white	90°*110°	20W	4000K	2600lm
204010	FUSION linear lamp 20W 4000K 2600lm 120°*120° white	120°*120°	20W	4000K	2600lm
204027	FUSION linear lamp 20W 4000K 2600lm LR40 white	LR40	20W	4000K	2600lm
204034	FUSION linear lamp 20W 4000K 2600lm P18 white	P18	20W	4000K	2600lm

Linear lamp FUSION 20W 0-10V 60cm



5-year warranty	0-10V	MAX -20 ÷ 45	130 lm W	PF 0,9	IP 20
DALI optionally	6 lenses	voltage 220-240V AC	50000 h L70B50	IK 08	






204041

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
204041	FUSION linear lamp 20W 4000K 2600lm 0-10V PC Cover 120° white	120°	20W	4000K	2600lm
204508	FUSION linear lamp 20W 4000K 2600lm 0-10V 30°*90° white	30°*90°	20W	4000K	2600lm
204058	FUSION linear lamp 20W 4000K 2600lm 0-10V 60°*110° white	60°*110°	20W	4000K	2600lm
204065	FUSION linear lamp 20W 4000K 2600lm 0-10V 90°*110° white	90°*110°	20W	4000K	2600lm
204072	FUSION linear lamp 20W 4000K 2600lm 0-10V 120°*120° white	120°*120°	20W	4000K	2600lm
204089	FUSION linear lamp 20W 4000K 2600lm 0-10V LR40 white	LR40	20W	4000K	2600lm
204096	FUSION linear lamp 20W 4000K 2600lm 0-10V P18 white	P18	20W	4000K	2600lm




Linear lamp FUSION 40W 120cm



LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203266	FUSION linear lamp 40W 4000K 5200lm PC Cover 120° white	120°	40W	4000K	5200lm
204102	FUSION linear lamp 40W 4000K 5200lm 30°*90° white	30°*90°	40W	4000K	5200lm
204119	FUSION linear lamp 40W 4000K 5200lm 60°*110° white	60°*110°	40W	4000K	5200lm
204126	FUSION linear lamp 40W 4000K 5200lm 90°*110° white	90°*110°	40W	4000K	5200lm
204133	FUSION linear lamp 40W 4000K 5200lm 120°*120° white	120°*120°	40W	4000K	5200lm
204140	FUSION linear lamp 40W 4000K 5200lm LR40 white	LR40	40W	4000K	5200lm
204157	FUSION linear lamp 40W 4000K 5200lm P18 white	P18	40W	4000K	5200lm




Linear lamp FUSION 40W 0-10V 120cm

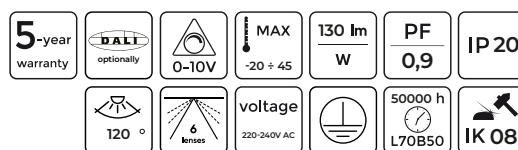

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
205574	FUSION linear lamp 40W 4000K 5200lm 0-10V PC Cover 120° white	120°	40W	4000K	5200lm
204164	FUSION linear lamp 40W 4000K 5200lm 0-10V 30°*90° white	30°*90°	40W	4000K	5200lm
204171	FUSION linear lamp 40W 4000K 5200lm 0-10V 60°*110° white	60°*110°	40W	4000K	5200lm
204188	FUSION linear lamp 40W 4000K 5200lm 0-10V 90°*110° white	90°*110°	40W	4000K	5200lm
204195	FUSION linear lamp 40W 4000K 5200lm 0-10V 120°*120° white	120°*120°	40W	4000K	5200lm
204201	FUSION linear lamp 40W 4000K 5200lm 0-10V LR40 white	LR40	40W	4000K	5200lm
204218	FUSION linear lamp 40W 4000K 5200lm 0-10V P18 white	P18	40W	4000K	5200lm




Linear lamp FUSION 60W 145cm



LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
203273	FUSION linear lamp 60W 4000K 7800lm PC Cover 120° white	120°	60W	4000K	7800lm
204225	FUSION linear lamp 60W 4000K 7800lm 30°*90° white	30°*90°	60W	4000K	7800lm
204232	FUSION linear lamp 60W 4000K 7800lm 60°*110° white	60°*110°	60W	4000K	7800lm
204249	FUSION linear lamp 60W 4000K 7800lm 90°*110° white	90°*110°	60W	4000K	7800lm
204256	FUSION linear lamp 60W 4000K 7800lm 120°*120° white	120°*120°	60W	4000K	7800lm
204263	FUSION linear lamp 60W 4000K 7800lm LR40 white	LR40	60W	4000K	7800lm
204270	FUSION linear lamp 60W 4000K 7800lm P18 white	P18	60W	4000K	7800lm

Linear lamp FUSION 60W 0-10V 145cm



LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
205581	FUSION linear lamp 60W 4000K 7800lm 0-10V PC Cover 120° white	120°	60W	4000K	7800lm
204287	FUSION linear lamp 60W 4000K 7800lm 0-10V 30°*90° white	30°*90°	60W	4000K	7800lm
204294	FUSION linear lamp 60W 4000K 7800lm 0-10V 60°*110° white	60°*110°	60W	4000K	7800lm
204300	FUSION linear lamp 60W 4000K 7800lm 0-10V 90°*110° white	90°*110°	60W	4000K	7800lm
204317	FUSION linear lamp 60W 4000K 7800lm 0-10V 120°*120° white	120°*120°	60W	4000K	7800lm
204324	FUSION linear lamp 60W 4000K 7800lm 0-10V LR40 white	LR40	60W	4000K	7800lm
204331	FUSION linear lamp 60W 4000K 7800lm 0-10V P18 white	P18	60W	4000K	7800lm



FUSION anti glare shield



LED line PRIME

SYMBOL	NAME	COMPATIBLE PRODUCTS
203587	FUSION ANTI GLARE SHIELD UGR<19 black	FUSION 20W/40W/60W
203570	FUSION ANTI GLARE SHIELD UGR<19 white	FUSION 20W/40W/60W

FUSION adjustable connector

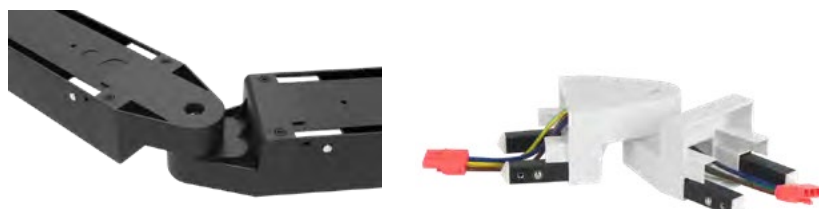

LED line PRIME

SYMBOL	NAME	COMPATIBLE PRODUCTS	ANGLE
479709	FUSION ADJUSTABLE CONNECTOR black	FUSION 20W/40W/60W	-90° ÷ +90°




FUSION L connector






LED line PRIME

SYMBOL	NAME	COMPATIBLE PRODUCTS	ANGLE
204553	FUSION L CONNECTOR black	FUSION 20W/40W/60W	90°
204560	FUSION L CONNECTOR white	FUSION 20W/40W/60W	90°

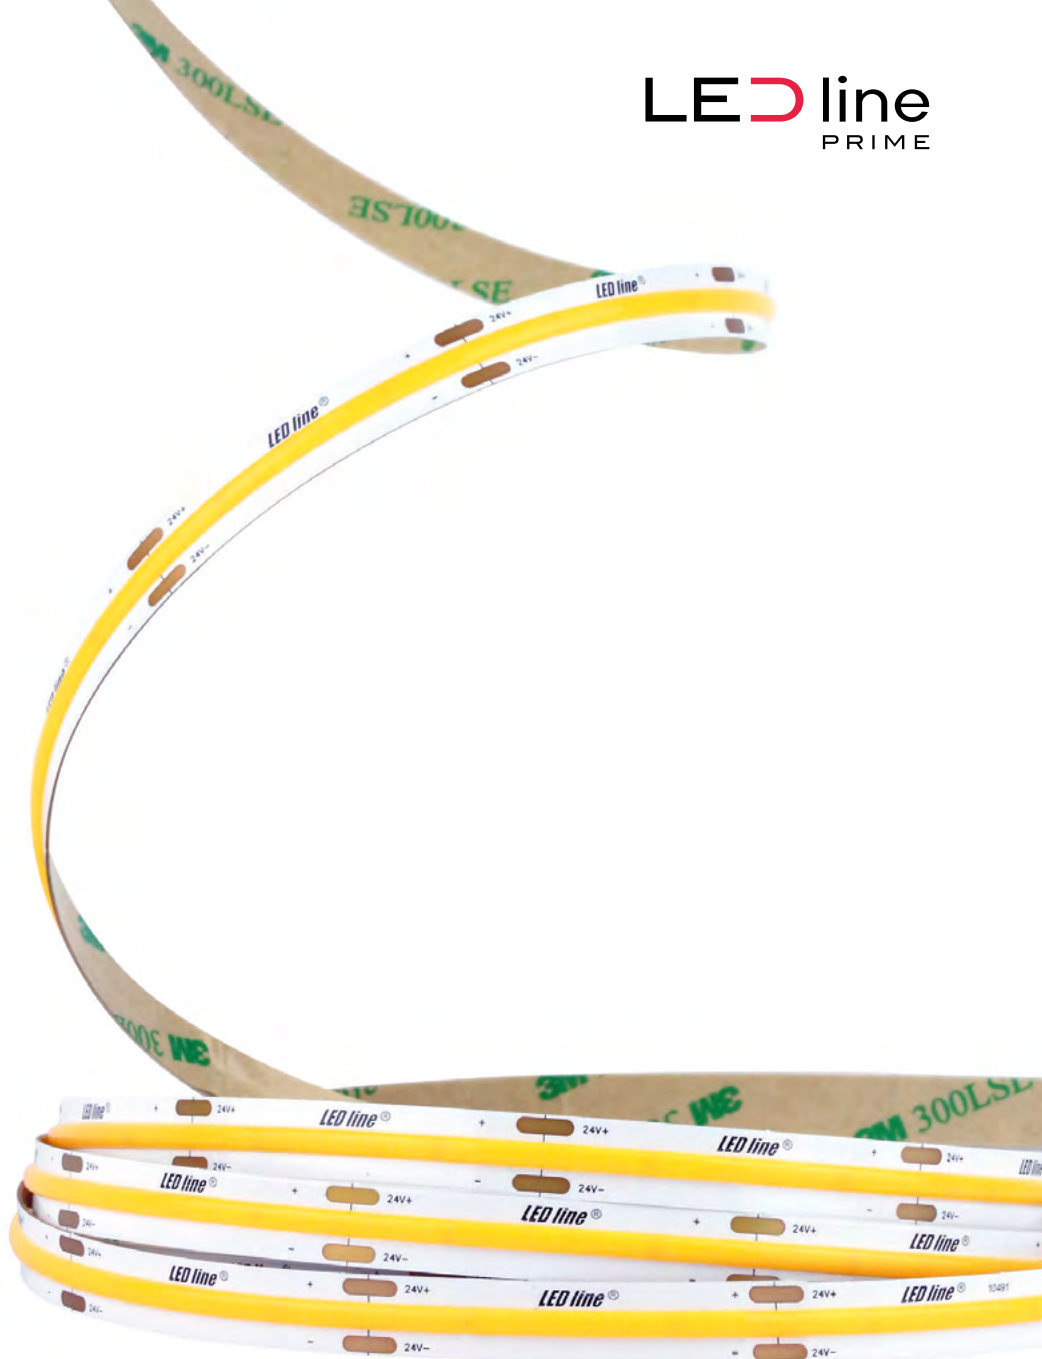

LED STRIPS COB

LED Strip COB 24V white IP20





LED line PRIME

SYMBOL	NAME	POWER	CCT	LUMINOUS	REEL	VOLTAGE	LED
476821	LED line PRIME LED strip 320 COB 24V 2700K 8W	8 [W/m]	2700K	800 [lm/m]	5M	24V DC	COB
476838	LED line PRIME LED strip 320 COB 24V 4000K 8W	8 [W/m]	4000K	800 [lm/m]	5M	24V DC	COB
476845	LED line PRIME LED strip 320 COB 24V 6500K 8W	8 [W/m]	6500K	800 [lm/m]	5M	24V DC	COB
479754	LED line PRIME LED strip 320 COB 24V 2700K 8W 30m	8 [W/m]	2700K	800 [lm/m]	30M	24V DC	COB
479761	LED line PRIME LED strip 320 COB 24V 4000K 8W 30m	8 [W/m]	4000K	800 [lm/m]	30M	24V DC	COB
479778	LED line PRIME LED strip 320 COB 24V 6500K 8W 30m	8 [W/m]	6500K	800 [lm/m]	30M	24V DC	COB
479785	LED line PRIME LED strip 480 COB 24V 2700K 11W	11 [W/m]	2700K	1100 [lm/m]	5M	24V DC	COB
479792	LED line PRIME LED strip 480 COB 24V 4000K 11W	11 [W/m]	4000K	1100 [lm/m]	5M	24V DC	COB
479808	LED line PRIME LED strip 480 COB 24V 6500K 11W	11 [W/m]	6000K	1100 [lm/m]	5M	24V DC	COB
200005	LED line PRIME LED strip 480 COB 24V 2700K 11W 30m	11 [W/m]	2700K	1100 [lm/m]	30M	24V DC	COB
200012	LED line PRIME LED strip 480 COB 24V 4000K 11W 30m	11 [W/m]	4000K	1100 [lm/m]	30M	24V DC	COB
200029	LED line PRIME LED strip 480 COB 24V 6500K 11W 30m	11 [W/m]	6000K	1100 [lm/m]	30M	24V DC	COB
479785	LED line PRIME LED strip 480 COB 24V 2700K 11W	11 [W/m]	2700K	1100 [lm/m]	5M	24V DC	COB
479792	LED line PRIME LED strip 480 COB 24V 4000K 11W	11 [W/m]	4000K	1100 [lm/m]	5M	24V DC	COB
479808	LED line PRIME LED strip 480 COB 24V 6500K 11W	11 [W/m]	6000K	1100 [lm/m]	5M	24V DC	COB
200005	LED line PRIME LED strip 480 COB 24V 2700K 11W 30m	11 [W/m]	2700K	1100 [lm/m]	30M	24V DC	COB
200012	LED line PRIME LED strip 480 COB 24V 4000K 11W 30m	11 [W/m]	4000K	1100 [lm/m]	30M	24V DC	COB
200029	LED line PRIME LED strip 480 COB 24V 6500K 11W 30m	11 [W/m]	6000K	1100 [lm/m]	30M	24V DC	COB
478245	LED line PRIME LED strip 480 COB 24V 2700K 18W	18 [W/m]	2700K	1440 [lm/m]	5M	24V DC	COB
478269	LED line PRIME LED strip 480 COB 24V 4000K 18W	18 [W/m]	4000K	1520 [lm/m]	5M	24V DC	COB
478313	LED line PRIME LED strip 480 COB 24V 6500K 18W	18 [W/m]	6500K	1520 [lm/m]	5M	24V DC	COB
200098	LED line PRIME LED strip 480 COB 24V 2700K 18W 30m	18 [W/m]	2700K	1800 [lm/m]	30M	24V DC	COB
200104	LED line PRIME LED strip 480 COB 24V 4000K 18W 30m	18 [W/m]	4000K	1800 [lm/m]	30M	24V DC	COB
200111	LED line PRIME LED strip 480 COB 24V 6500K 18W 30m	18 [W/m]	6000K	1800 [lm/m]	30M	24V DC	COB

LED Strip 576 COB 24V RGB IP20

5-year warranty	YELLOW FREE™	ON OFF 50000	180°	voltage 24V DC	100 lm W	2880 LED	IP20
6,25 cm	5	576 1m	COB	*.IES ↓	MAX -30 ÷ 45	50000 h L70B50	PCB 2 oz





LED line PRIME

SYMBOL	NAME	POWER	COLOUR / WAVELENGTH	REEL	VOLTAGE	LED
479907	LED line PRIME LED strip 576 COB 24V RGB 10W	10 [W/m]	RGB/620nm, 520nm, 465nm	5M	24V DC	COB
479921	LED line PRIME LED strip 576 COB 24V RGB 10W 30m	10 [W/m]	RGB/620nm, 520nm, 465nm	30M	24V DC	COB

LED Strip 840 COB 24V RGCCT IP20



5-year warranty	3-step MacAdam	YELLOW FREE™	ON OFF 50000	180°	voltage 24V DC	80 lm W	4200 LED	IP20
4,16 cm	3M 300 LSE	5	840 1m	COB	*.IES ↓	MAX -30 ÷ 45	50000 h L70B50	PCB 2 oz



LED line PRIME

SYMBOL	NAME	POWER	CCT	LUMINOUS	REEL	VOLTAGE	LED
200173	LED line PRIME LED strip 840 COB 24V RGCCT 18W	18 [W/m]	2700-6500K	720 [lm/m]	5M	24V DC	COB



LED Strip COB 24V white IP66

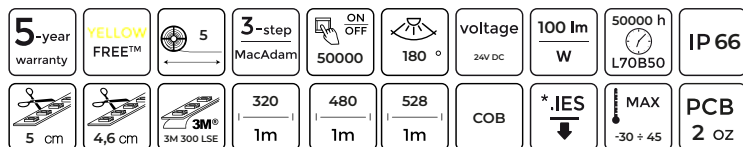

LED line PRIME

SYMBOL	NAME	POWER	CCT	LUMINOUS	REEL	VOLTAGE	LED
479723	LED line PRIME LED strip 320 COB 24V 2700K 8W IP66	8 [W/m]	2700K	800 [lm/m]	5M	24V DC	COB
479730	LED line PRIME LED strip 320 COB 24V 4000K 8W IP66	8 [W/m]	4000K	800 [lm/m]	5M	24V DC	COB
479747	LED line PRIME LED strip 320 COB 24V 6500K 8W IP66	8 [W/m]	6500K	800 [lm/m]	5M	24V DC	COB
479815	LED line PRIME LED strip 480 COB 24V 2700K 11W IP66	11 [W/m]	2700K	1100 [lm/m]	5M	24V DC	COB
479822	LED line PRIME LED strip 480 COB 24V 4000K 11W IP66	11 [W/m]	4000K	1100 [lm/m]	5M	24V DC	COB
479839	LED line PRIME LED strip 480 COB 24V 6500K 11W IP66	11 [W/m]	6000K	1100 [lm/m]	5M	24V DC	COB
479877	LED line PRIME LED strip 528 COB 24V 2700K 14W IP66	14 [W/m]	2700K	1400 [lm/m]	5M	24V DC	COB
479884	LED line PRIME LED strip 528 COB 24V 4000K 14W IP66	14 [W/m]	4000K	1400 [lm/m]	5M	24V DC	COB
479891	LED line PRIME LED strip 528 COB 24V 6500K 14W IP66	14 [W/m]	6000K	1400 [lm/m]	5M	24V DC	COB

LED Strip COB 24V white IP66

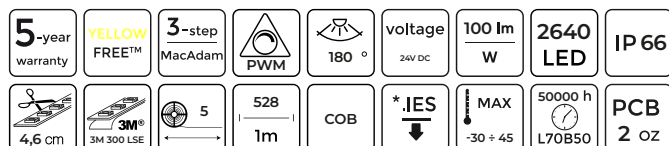



LED line PRIME

SYMBOL	NAME	POWER	CCT	REEL	VOLTAGE	LED
479891	LED line PRIME LED strip 528 COB 24V 6500K 14W IP66	14 [W/m]	RGB/620nm, 520nm, 465nm	5M	24V DC	COB



LED STRIPS
EXPERT




LED Strip SMD2835 24V white 160/200 lm/W IP20



LED line PRIME

SYMBOL	NAME	POWER	CCT	LUMINOUS	REEL	VOLTAGE	LED
479945	LED Strip 128 SMD2835 24V 2700K IP20 8,5W 160lm/W	8,5 [W/m]	2700K	1360 [lm/m]	5M	24V DC	SMD2835
479952	LED Strip 128 SMD2835 24V 4000K IP20 8,5W 160lm/W	8,5 [W/m]	4000K	1360 [lm/m]	5M	24V DC	SMD2835
479969	LED Strip 192 SMD2835 24V 2700K IP20 17,5W 160lm/W	17,5 [W/m]	2700K	2800 [lm/m]	5M	24V DC	SMD2835
479976	LED Strip 192 SMD2835 24V 4000K IP20 17,5W 160lm/W	17,5 [W/m]	4000K	2800 [lm/m]	5M	24V DC	SMD2835
479983	LED Strip 144 SMD2835 24V 2700K IP20 6,5W 200lm/W	6,5 [W/m]	2700K	1300 [lm/m]	5M	24V DC	SMD2835
479990	LED Strip 144 SMD2835 24V 4000K IP20 6,5W 200lm/W	6,5 [W/m]	4000K	1300 [lm/m]	5M	24V DC	SMD2835




LED Strip 300 SMD3528 12V MULTIwhite CCT IP20 9,6W



LED line PRIME

SYMBOL	NAME	POWER	CCT	LUMINOUS	REEL	VOLTAGE	LED
243714	LED Strip 300 SMD2835 12V MULTIwhite IP20 9,6W	9,6 [W/m]	3000K ÷ 6500K	800 [lm/m]	5M	12V DC	SMD2835
241819	LED Strip 300 SMD2835 24V MULTIwhite IP20 9,6W	8,5 [W/m]	3000K ÷ 6500K	800 [lm/m]	5M	24V DC	SMD2835



LED Strip 60 SMD2835 24V 4000K IP20 14W CRI98



LED line PRIME

SYMBOL	NAME	POWER	CCT	LUMINOUS	REEL	VOLTAGE	LED
479938	LED line PRIME LED strip 60 SMD 24V 4000K 14W CRI98	14 [W/m]	4000K	1200 [lm/m]	5M	24V DC	SMD2835



LED Strip 300 SMD5050 12V RGB 14.4 DIGITAL P943 CRI98

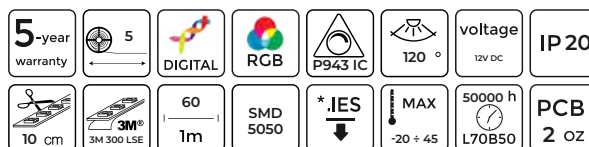

LED line PRIME

SYMBOL	NAME	POWER	COLOR / WAVELENGTH	REEL	VOLTAGE	LED
248238	LED line® strip 300 SMD 12V RGB 14,4W DIGITAL P943	14,4 [W/m]	RGB/ 620nm, 520nm, 465nm	5M	12V DC	SMD5050

LED Strip 600 SMD2216 12V 4000K IP20 5MM SLIM PCB 9,6W

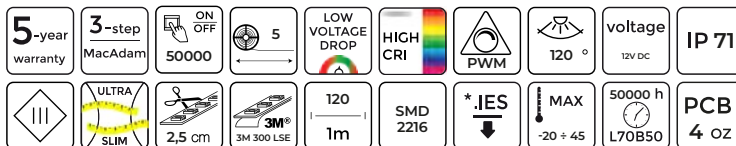




LED line PRIME

SYMBOL	NAME	POWER	CCT	LUMINOUS	REEL	VOLTAGE	LED
249167	LED line® strip 600 SMD 12V 4000K 9,6W 5mm WPCB	9,6 [W/m]	4000K	740 [lm/m]	5M	12V DC	SMD2216



LED STRIPS
CLASSIC




LED Strip 300 SMD3528 12V 4,8W white IP20

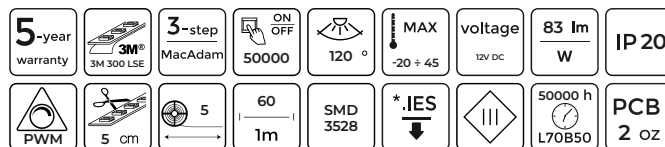

LED line LITE

SYMBOL	NAME	POWER	CCT	LUMINOUS	REEL	VOLTAGE	LED
246463	LED line® strip 300 SMD 12V 2400K 4,8W	4,8 [W/m]	2400K	400 [lm/m]	5M	12V DC	SMD3528
240164	LED line® strip 300 SMD 12V 3000K 4,8W	4,8 [W/m]	3000K	400 [lm/m]	5M	12V DC	SMD3528
249419	LED line® strip 300 SMD 12V 3000K 4,8W 30m	4,8 [W/m]	3000K	400 [lm/m]	30M	12V DC	SMD3528
477200	LED line® strip 300 SMD 12V 3000K 4,8W 50m	4,8 [W/m]	3000K	400 [lm/m]	50M	12V DC	SMD 3528
245602	LED line® strip 300 SMD 12V 4000K 4,8W	4,8 [W/m]	4000K	400 [lm/m]	5M	12V DC	SMD3528
249426	LED line® strip 300 SMD 12V 4000K 4,8W 30m	4,8 [W/m]	4000K	400 [lm/m]	30M	12V DC	SMD3528
477194	LED line® strip 300 SMD 12V 4000K 4,8W 50m	4,8 [W/m]	4000K	400 [lm/m]	50M	12V DC	SMD 3528
240188	LED line® strip 300 SMD 12V 6500K 4,8W	4,8 [W/m]	6500K	400 [lm/m]	5M	12V DC	SMD3528
249433	LED line® strip 300 SMD 12V 6500K 4,8W 30m	4,8 [W/m]	6500K	400 [lm/m]	30M	12V DC	SMD3528
477217	LED line® strip 300 SMD 12V 6500K 4,8W 50m	4,8 [W/m]	6500K	400 [lm/m]	50M	12V DC	SMD 3528
240195	LED line® strip 300 SMD 12V 11000K 4,8W	4,8 [W/m]	11000K	400 [lm/m]	5M	12V DC	SMD3528
249440	LED line® strip 300 SMD 12V 11000K 4,8W 30m	4,8 [W/m]	11000K	400 [lm/m]	30M	12V DC	SMD3528




LED Strip 300 SMD3528 24V 4,8W white IP20



LED line LITE

SYMBOL	NAME	POWER	CCT	LUMINOUS	REEL	VOLTAGE	LED
240645	LED line® strip 300 SMD 24V 3000K 4,8W	4,8 [W/m]	3000K	400 [lm/m]	5M	24V DC	SMD3528
241758	LED line® strip 300 SMD 24V 3000K 4,8W 30m	4,8 [W/m]	3000K	400 [lm/m]	30M	24V DC	SMD3528
240652	LED line® strip 300 SMD 24V 4000K 4,8W	4,8 [W/m]	4000K	400 [lm/m]	5M	24V DC	SMD3528
241765	LED line® strip 300 SMD 24V 4000K 4,8W 30m	4,8 [W/m]	4000K	400 [lm/m]	30M	24V DC	SMD3528
240676	LED line® strip 300 SMD 24V 6500K 4,8W	4,8 [W/m]	6500K	400 [lm/m]	5M	24V DC	SMD3528
241789	LED line® strip 300 SMD 24V 6500K 4,8W 30m	4,8 [W/m]	6500K	400 [lm/m]	30M	24V DC	SMD3528
240690	LED line® strip 300 SMD 24V 11000K 4,8W	4,8 [W/m]	11000K	400 [lm/m]	5M	24V DC	SMD3528
241796	LED line® strip 300 SMD 24V 11000K 4,8W 30m	4,8 [W/m]	11000K	400 [lm/m]	30M	24V DC	SMD3528




LED Strip 300 SMD3528 12V 4,8W COLOUR IP20

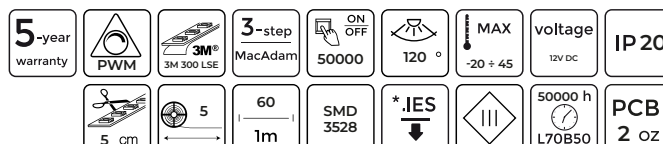

LED line LITE

SYMBOL	NAME	POWER	COLOUR / WAVELENGTH	REEL	VOLTAGE	LED
240201	LED line® strip 300 SMD 12V red 4,8W	4,8 [W/m]	RED/ 620	5M	12V DC	SMD3528
240225	LED line® strip 300 SMD 12V green 4,8W	4,8 [W/m]	GREEN / 520nm	5M	12V DC	SMD3528
240218	LED line® strip 300 SMD 12V blue 4,8W	4,8 [W/m]	BLUE / 465nm	5M	12V DC	SMD3528
240232	LED line® strip 300 SMD 12V yellow 4,8W	4,8 [W/m]	YELLOW / 590nm	5M	12V DC	SMD3528





LED Strip 600 SMD2835 12V 9,6W white IP20



LED line LITE

SYMBOL	NAME	POWER	CCT	LUMINOUS	REEL	VOLTAGE	LED
477132	LED line® strip 600 SMD 12V 2700K 9,6W	9,6 [W/m]	2700K	960 [lm/m]	5M	12V DC	SMD 2835
477262	LED line® strip 600 SMD 12V 2700K 9,6W 30m	9,6 [W/m]	2700K	960 [lm/m]	30M	12V DC	SMD 2835
477149	LED line® strip 600 SMD 12V 4000K 9,6W	9,6 [W/m]	4000K	960 [lm/m]	5M	12V DC	SMD 2835
477279	LED line® strip 600 SMD 12V 4000K 9,6W 30m	9,6 [W/m]	4000K	960 [lm/m]	30M	12V DC	SMD 2835
477156	LED line® strip 600 SMD 12V 6500K 9,6W	9,6 [W/m]	6500K	960 [lm/m]	5M	12V DC	SMD 2835
477118	LED line® strip 600 SMD 12V 4000K 9,6W	9,6 [W/m]	11000K	960 [lm/m]	5M	12V DC	SMD 2835




LED Strip 150/300 SMD5050 RGB IP20

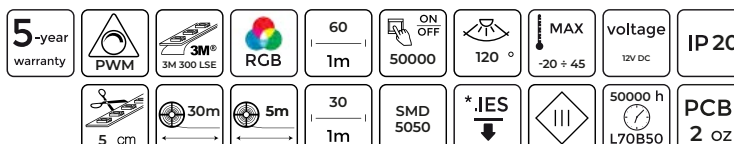

LED line LITE

SYMBOL	NAME	POWER	COLOUR / WAVELENGTH	REEL	VOLTAGE	LED
240140	LED line® strip 150 SMD 12V RGB 7,2W	7,2 [W/m]	RGB/ 620nm, 520nm, 465nm	5M	12V DC	SMD5050
240522	LED line® strip 300 SMD 12V RGB 14,4W	14,4 [W/m]	RGB/620nm, 520nm, 465nm	5M	12V DC	SMD5050
477255	LED line® strip 300 SMD 12V RGB 14,4W 30m	14,4 [W/m]	RGB/620nm, 520nm, 465nm	30M	12V DC	SMD5050
240539	LED line® strip 300 SMD 24V RGB 14,4W	14,4 [W/m]	RGB/620nm, 520nm, 465nm	5M	12V DC	SMD5050
477675	LED line® strip 300 SMD 24V RGB 14,4W 30m	14,4 [W/m]	RGB/620nm, 520nm, 465nm	30M	12V DC	SMD5050

LED Strip 300 SMD5050 RGBW IP20

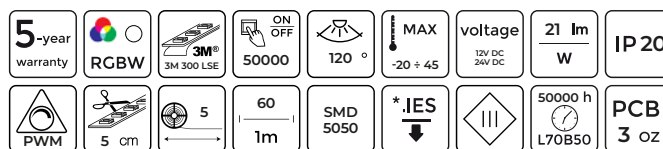




LED line LITE

SYMBOL	NAME	POWER	CCT	LUMINOUS	REEL	VOLTAGE	LED
247071	LED line® strip 300 SMD 12V 2700K RGBW 19,2W	19,2 [W/m]	2700K	400 [lm/m]	5M	12V DC	SMD5050
477231	LED line® strip 300 SMD 12V 2700K RGBW 19,2W 30m	19,2 [W/m]	2700K	400 [lm/m]	30M	12V DC	SMD 5050
477309	LED line® strip 300 SMD 12V 4000K RGBW 19,2W	19,2 [W/m]	4000K	400 [lm/m]	5M	12V DC	SMD 5050
245657	LED line® strip 300 SMD 12V 6500K RGBW 19,2W	19,2 [W/m]	6500K	400 [lm/m]	5M	12V DC	SMD5050
477248	LED line® strip 300 SMD 12V 6500K RGBW 19,2W 30m	19,2 [W/m]	6500K	400 [lm/m]	30M	12V DC	SMD 5050
241673	LED line® strip 300 SMD 24V 2700K RGBW 19,2W	19,2 [W/m]	2700K	400 [lm/m]	5M	24V DC	SMD5050
477316	LED line® strip 300 SMD 24V 4000K RGBW 19,2W	19,2 [W/m]	4000K	400 [lm/m]	5M	24V DC	SMD 5050
241680	LED line® strip 300 SMD 24V 6500K RGBW 19,2W	19,2 [W/m]	6500K	400 [lm/m]	5M	24V DC	SMD5050



LED STRIPS
WATERPROOF




LED Strip 300 SMD2835 12V 4,8W white IP65



LED line LITE

SYMBOL	NAME	POWER	CCT	LUMINOUS	REEL	VOLTAGE	LED
247774	LED line® strip 300 SMD 12V 2400K 4,8W IP65	4,8 [W/m]	2400K	400 [lm/m]	5M	12V DC	SMD3528
240249	LED line® strip 300 SMD 12V 3000K 4,8W IP65	4,8 [W/m]	3000K	400 [lm/m]	5M	12V DC	SMD3528
245619	LED line® strip 300 SMD 12V 4000K 4,8W IP65	4,8 [W/m]	4000K	400 [lm/m]	5M	12V DC	SMD3528
240256	LED line® strip 300 SMD 12V 6500K 4,8W IP65	4,8 [W/m]	6500K	400 [lm/m]	5M	12V DC	SMD3528
240263	LED line® strip 300 SMD 12V 11000K 4,8W IP65	4,8 [W/m]	11000K	400 [lm/m]	5M	12V DC	SMD3528




LED Strip 300 SMD3528 24V 4,8W white IP65



LED line LITE

SYMBOL	NAME	POWER	CCT	LUMINOUS	REEL	VOLTAGE	LED
240713	LED line® strip 300 SMD 24V 3000K 4,8W IP65	4,8 [W/m]	3000K	400 [lm/m]	5M	24V DC	SMD3528
240720	LED line® strip 300 SMD 24V 4000K 4,8W IP65	4,8 [W/m]	4000K	400 [lm/m]	5M	24V DC	SMD3528
240744	LED line® strip 300 SMD 24V 6500K 4,8W IP65	4,8 [W/m]	6500K	400 [lm/m]	5M	24V DC	SMD3528
241147	LED line® strip 300 SMD 24V 11000K 4,8W IP65	4,8 [W/m]	11000K	400 [lm/m]	5M	24V DC	SMD3528




LED Strip 300 SMD3528 24V 4,8W white IP67

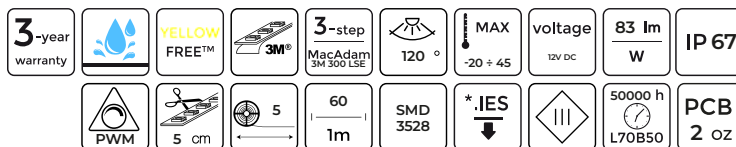

LED line LITE

SYMBOL	NAME	POWER	CCT	LUMINOUS	REEL	VOLTAGE	LED
241468	LED line® strip 300 SMD 12V 3000K 4,8W IP67	4,8 [W/m]	3000K	400 [lm/m]	5M	12V DC	SMD3528
245626	LED line® strip 300 SMD 12V 4000K 4,8W IP67	4,8 [W/m]	4000K	400 [lm/m]	5M	12V DC	SMD3528
241475	LED line® strip 300 SMD 12V 6500K 4,8W IP67	4,8 [W/m]	6500K	400 [lm/m]	5M	12V DC	SMD3528




LED Strip 300 SMD3528 12V 4,8W COLOUR IP65



LED line LITE

SYMBOL	NAME	POWER	CCT	LUMINOUS	REEL	VOLTAGE	LED
240270	LED line® strip 300 SMD 12V red 4,8W IP65	4,8 [W/m]	RED/ 620	400 [lm/m]	5M	12V DC	SMD3528
240294	LED line® strip 300 SMD 12V green 4,8W IP65	4,8 [W/m]	GREEN / 520nm	400 [lm/m]	5M	12V DC	SMD3528
240287	LED line® strip 300 SMD 12V blue 4,8W IP65	4,8 [W/m]	BLUE / 465nm	400 [lm/m]	5M	12V DC	SMD3528
240300	LED line® strip 300 SMD 12V yellow 4,8W IP65	4,8 [W/m]	YELLOW / 590nm	400 [lm/m]	5M	12V DC	SMD3528




LED Strip 600 SMD2835 12V 9,6W white IP65



LED line LITE

SYMBOL	NAME	POWER	CCT	LUMINOUS	REEL	VOLTAGE	LED
471345	LED line® strip 600 SMD 12V 2700K 9,6W IP65	9,6 [W/m]	2700K	960 [lm/m]	5M	12V DC	SMD 2835
477040	LED line® strip 600 SMD 12V 4000K 9,6W IP65	9,6 [W/m]	4000K	960 [lm/m]	5M	12V DC	SMD 2835
477057	LED line® strip 600 SMD 12V 6500K 9,6W IP65	9,6 [W/m]	6500K	960 [lm/m]	5M	12V DC	SMD 2835




LED Strip 300 SMD5050 12V 14,4W RGB IP67

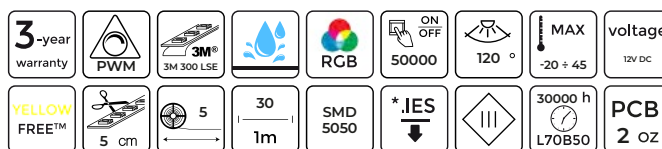

LED line LITE

SYMBOL	NAME	POWER	COLOUR / WAVELENGTH	REEL	VOLTAGE	LED
240157	LED line® strip 150 SMD 12V RGB 7,2W IP65	7,2 [W/m]	RGB/620nm, 520nm, 465nm	5M	12V DC	SMD5050
240614	LED line® strip 300 SMD 12V RGB 14,4W IP65	14,4 [W/m]	RGB/620nm, 520nm, 465nm	5M	12V DC	SMD5060
241741	LED line® strip 300 SMD 24V RGB 14,4W IP65	14,4 [W/m]	RGB/620nm, 520nm, 465nm	5M	24V DC	SMD5050

LED Strip 300 SMD5050 RGB IP67

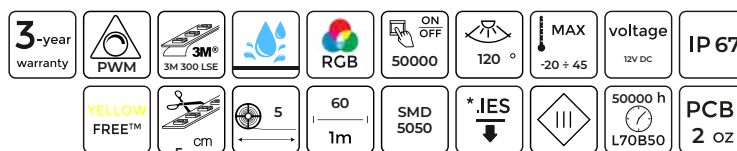

LED line LITE


SYMBOL	NAME	POWER	COLOUR / WAVELENGTH	REEL	VOLTAGE	LED
241451	LED line® strip 300 SMD 12V RGB 14,4W IP67	14,4 [W/m]	RGB/ 620nm, 520nm, 465nm	5M	12V DC	SMD5050



LED STRIPS
ACCESSORIES

LED line® COB strip CLICK CONNECTOR
single with wire 10 mm 2 PIN


COB



SYMBOL	NAME	TYPE	TYPE OF CONNCONNECTOR	LED STRIP WIDTH	LED
478351	COB Strip CLICK CONNECTOR single with wire 10 mm 2 PIN	2PIN	single + wire	10 mm	COB


LED line® COB strip CLICK CONNECTOR
double 10 mm 2 PIN with a cable

COB



SYMBOL	NAME	TYPE	TYPE OF CONNCONNECTOR	LED STRIP WIDTH	LED
478368	COB Strip CLICK CONNECTOR double 10 mm 2 PIN with a cable	2PIN	double + wire	10 mm	COB



LED line PRIME COB LED strip connector angular 2 PIN Type L



LED line PRIME

SYMBOL	NAME	TYPE	TYPE OF CONNECTOR	LED STRIP WIDTH	CCT	LED
200456	COB LED Strip connector angular 2700K 8mm 2 PIN Type L 8W	2PIN	L	8 mm	2700K	COB
200463	COB LED Strip connector angular 4000K 8mm 2 PIN Type L 8W	2PIN	L	8 mm	4000K	COB
200470	COB LED Strip connector angular 6500K 8mm 2 PIN Type L 8W	2PIN	L	8 mm	6500K	COB
200487	COB LED Strip connector angular 2700K 8mm 2 PIN Type L 11W	2PIN	L	8 mm	2700K	COB
200494	COB LED Strip connector angular 4000K 8mm 2 PIN Type L 11W	2PIN	L	8 mm	4000K	COB
200500	COB LED Strip connector angular 6500K 8mm 2 PIN Type L 11W	2PIN	L	8 mm	6500K	COB
200517	COB LED Strip connector angular 2700K 10mm 2 PIN Type L 14W	2PIN	L	10 mm	2700K	COB
200524	COB LED Strip connector angular 4000K 10mm 2 PIN Type L 14W	2PIN	L	10 mm	4000K	COB
200531	COB LED Strip connector angular 6500K 10mm 2 PIN Type L 14W	2PIN	L	10 mm	6500K	COB

LED line® COB strip CLICK CONNECTOR angular 2 PIN Type L



LED line PRIME

SYMBOL	NAME	TYPE	TYPE OF CONNECTOR	LED STRIP WIDTH	CCT	LED
478412	COB Strip CLICK CONNECTOR angular 2700K 10 mm 2 PIN Type L 18W	2PIN	L	10 mm	2700K	COB
478429	COB Strip CLICK CONNECTOR angular 4000K 10 mm 2 PIN Type L 18W	2PIN	L	10 mm	4000K	COB
478436	COB Strip CLICK CONNECTOR angular 6000K 10 mm 2 PIN Type L 18W	2PIN	L	10 mm	6500K	COB

COB Strip CLICK CONNECTOR double 2 PIN

IP 20

COB



10

17

5





LED line PRIME

SYMBOL	NAME	TYPE	LED STRIP WIDTH	LED
200609	COB Strip CLICK CONNECTOR double 8mm 2 PIN	2PIN	8mm	COB
200616	COB Strip CLICK CONNECTOR double 10mm 2 PIN	2PIN	10mm	COB

COB Strip CLICK CONNECTOR double 2 PIN type L

IP 20


COB



20

17

5





LED line PRIME

SYMBOL	NAME	TYPE	LED STRIP WIDTH	LED
200548	COB Strip CLICK CONNECTOR double 8mm 2 PIN type L	2PIN	8mm	COB
200548	COB Strip CLICK CONNECTOR double 8mm 2 PIN type L	2PIN	10mm	COB

COB RGB Strip CLICK CONNECTOR double 10mm 4 PIN

IP 20

COB



12

17

5






LED line PRIME

SYMBOL	NAME	TYPE	LED STRIP WIDTH	LED
200623	COB RGB Strip CLICK CONNECTOR double 10mm 4 PIN	4PIN	10mm	COB


COB Strip CLICK CONNECTOR angular Type T



LED line PRIME

SYMBOL	NAME	TYPE	TYPE OF CONNECTOR	LED STRIP WIDTH	LED
246555	COB Strip CLICK CONNECTOR angular 8 mm 2 PIN Type T	2PIN	T	8mm	WHITE/ COLOUR
246524	COB Strip CLICK CONNECTOR angular 10 mm 4 PIN Type T RGB	4PIN	T	10mm	RGB


COB Strip CLICK CONNECTOR angular Type L



LED line PRIME

SYMBOL	NAME	TYPE	TYPE OF CONNECTOR	LED STRIP WIDTH	LED
246562	COB Strip CLICK CONNECTOR angular 8 mm 2 PIN Type L	2PIN	L	8mm	WHITE/ COLOUR
246517	COB Strip CLICK CONNECTOR angular 10 mm 4 PIN Type L RGB	4PIN	L	10mm	RGB

COB Strip CLICK CONNECTOR angular Type +



LED line PRIME

SYMBOL	NAME	TYPE	TYPE OF CONNECTOR	LED STRIP WIDTH	LED
246548	COB Strip CLICK CONNECTOR angular 8 mm 2 PIN Type +	2PIN	+	8mm	WHITE/ COLOUR
246531	COB Strip CLICK CONNECTOR angular 10 mm 4 PIN Type + RGB	4PIN	+	10mm	RGB
247859	COB Strip CLICK CONNECTOR angular 12 mm 5 PIN Type + RGBW	5PIN	+	12mm	RGBW

Strip mounting clip

IP20



LED line PRIME

SYMBOL	NAME	LED STRIP WIDTH	LED
200586	Strip mounting clip 8mm	8mm	COB
200593	Strip mounting clip 10mm	10mm	COB

Strip mounting bracket

IP20



LED line PRIME

SYMBOL	NAME	LED STRIP WIDTH	LED
200562	Strip mounting bracket 8mm	8mm	SMD, COB
200579	Strip mounting bracket 10mm	10mm	SMD, COB



LED PANELS
DIORA

Panel DIORA 4000K



5-year warranty

SMD 2835

flicker free

MAX
-5 ÷ 40

75 °

voltage
220-240V AC

140-150 lm
W

PF
0,9

96 LED

IP20

1-10V

LOW UGR

NARROW BEAM ANGLE

*.IES
↓


ON OFF
50000

polycarbonate

metal

54000 h
L70B50

IK 02




LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
244193	Panel DIORA 15-36W 4000K 2250-5040lm	75°	15-36W	4000K	2250-5040lm
471260	Panel DIORA 36W 4000K 5040lm 1-10V	75°	36W	4000K	5040lm

Efficiency
120lm/W - 3600lm

Quick surface
mounting only 2 min

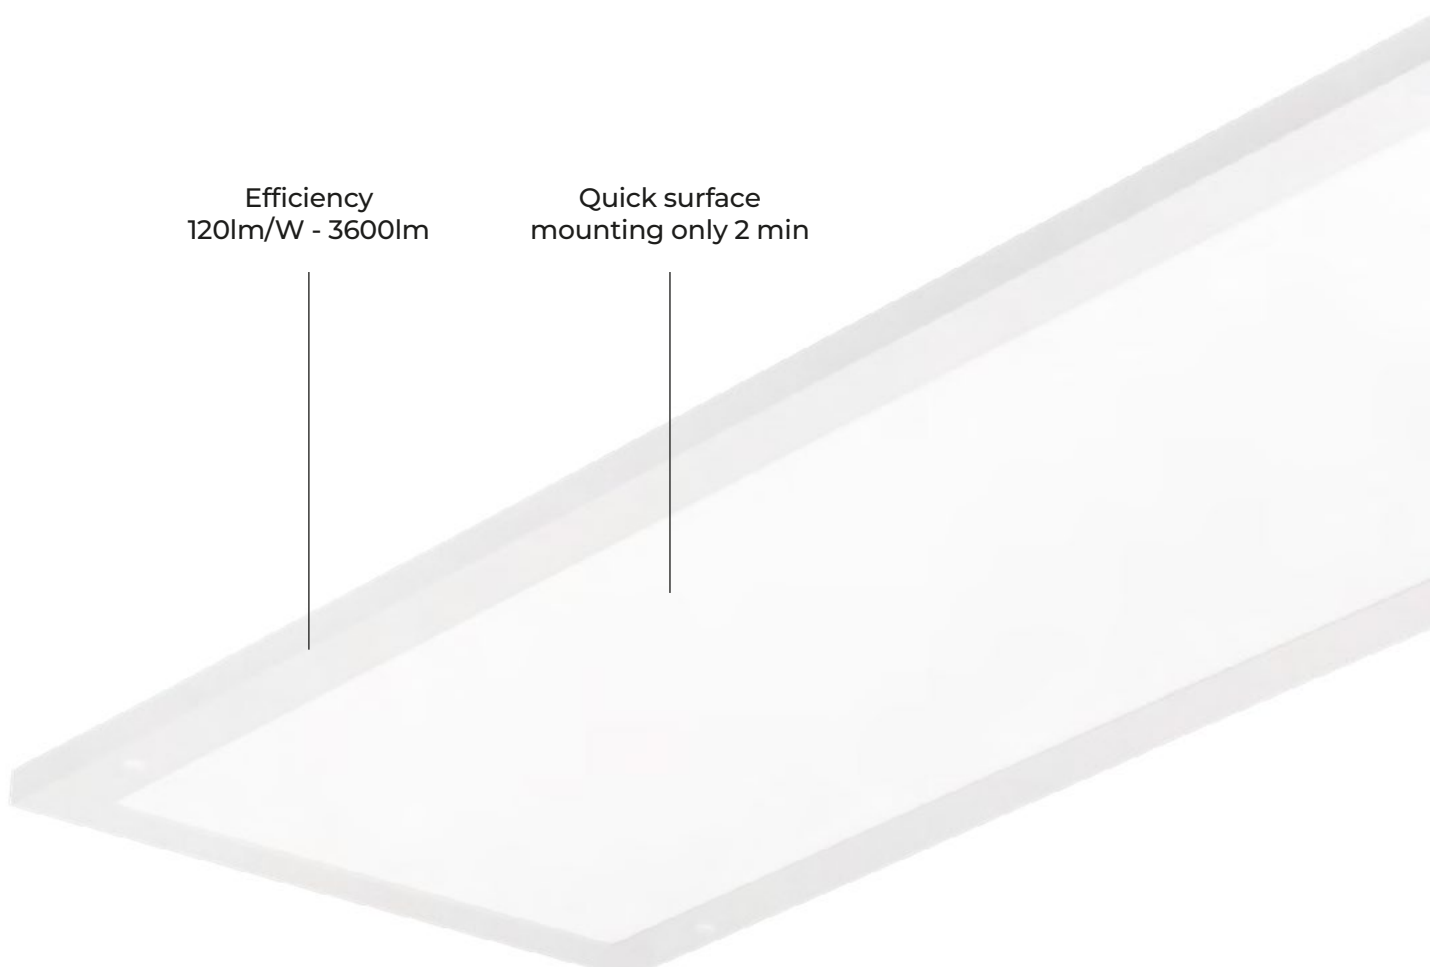

LED PANELS


PANEL 2in1



60x60cm









120x30cm



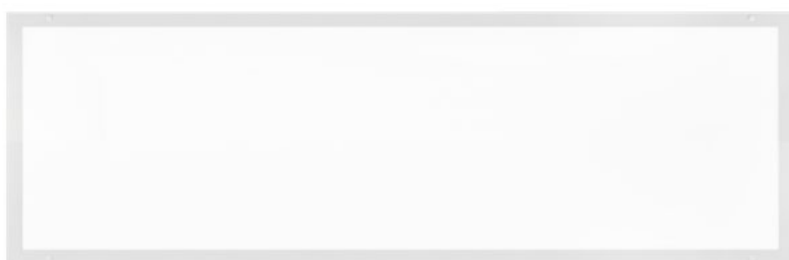


surface mounting

recessed mounting

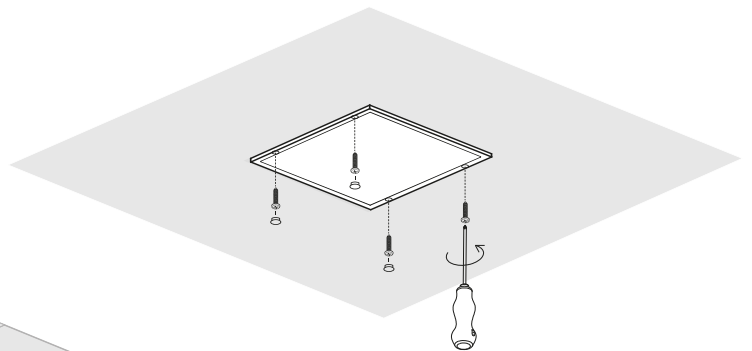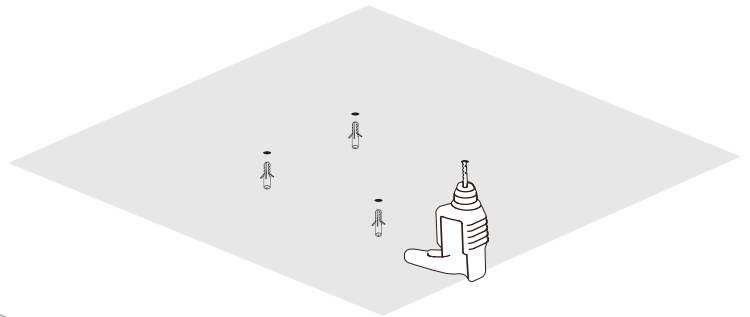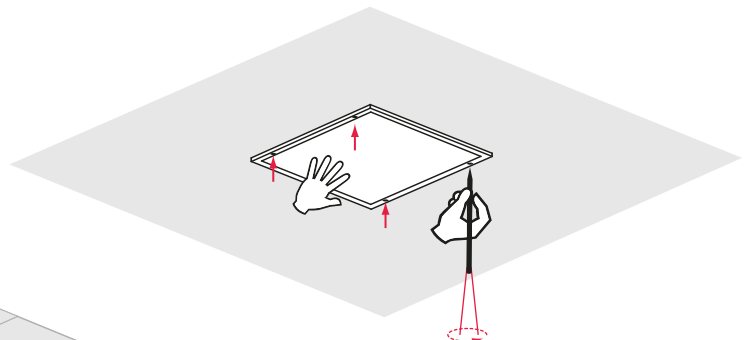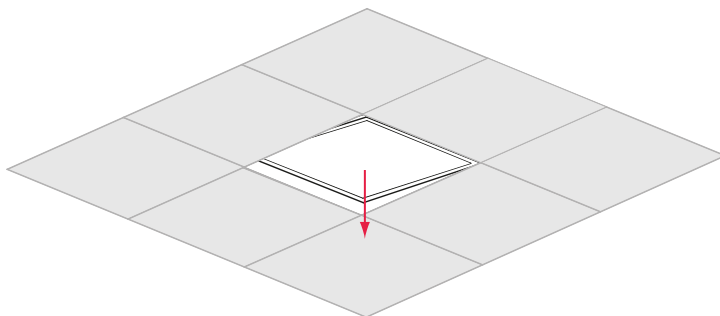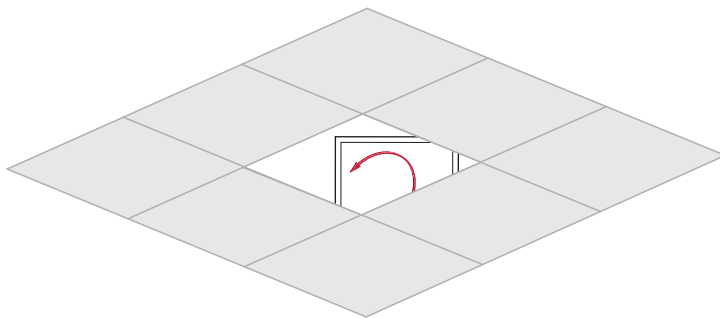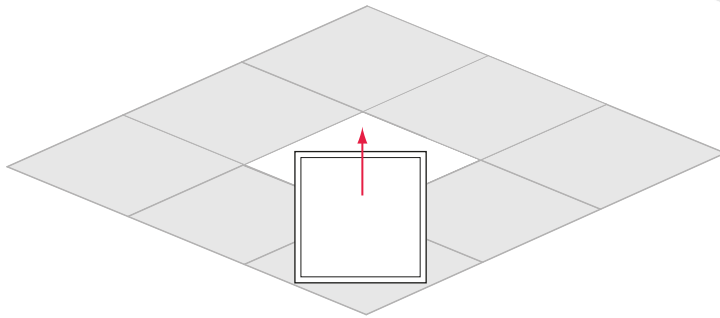




**Panel 2in1 30W 3600lm 4000K
120x30mm**



LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
475459	Panel 2in1 30W 4000K 3600lm 120x30	120°	30W	4000K	3600lm

**Panel 2in1 30W 3600lm 4000K
square**

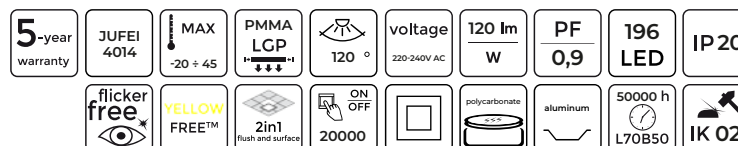

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
478481	Panel 2in1 30W 4000K 3600lm square	120°	30W	4000K	3600lm



LED PANELS
PANEL SLIM

Panel Slim 40W 4000K
4400lm UGR<19 595x595

5-year
warranty

LiFi
DRIVER

flicker
free

ON
OFF
50000

80 °

MAX
-25 + 45

voltage
220-240V AC

110 lm
W

PF
0,9

IP20

SUNG
SMD
LED

YELLOW
FREE™

LOW UGR

*.IES



polystyrene

aluminum

50000 h
L70B50


216
LED

IK 02





LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
202474	Panel Slim 40W 4000K 4400lm UGR<19 595x595	80°	40W	4000K	4400lm

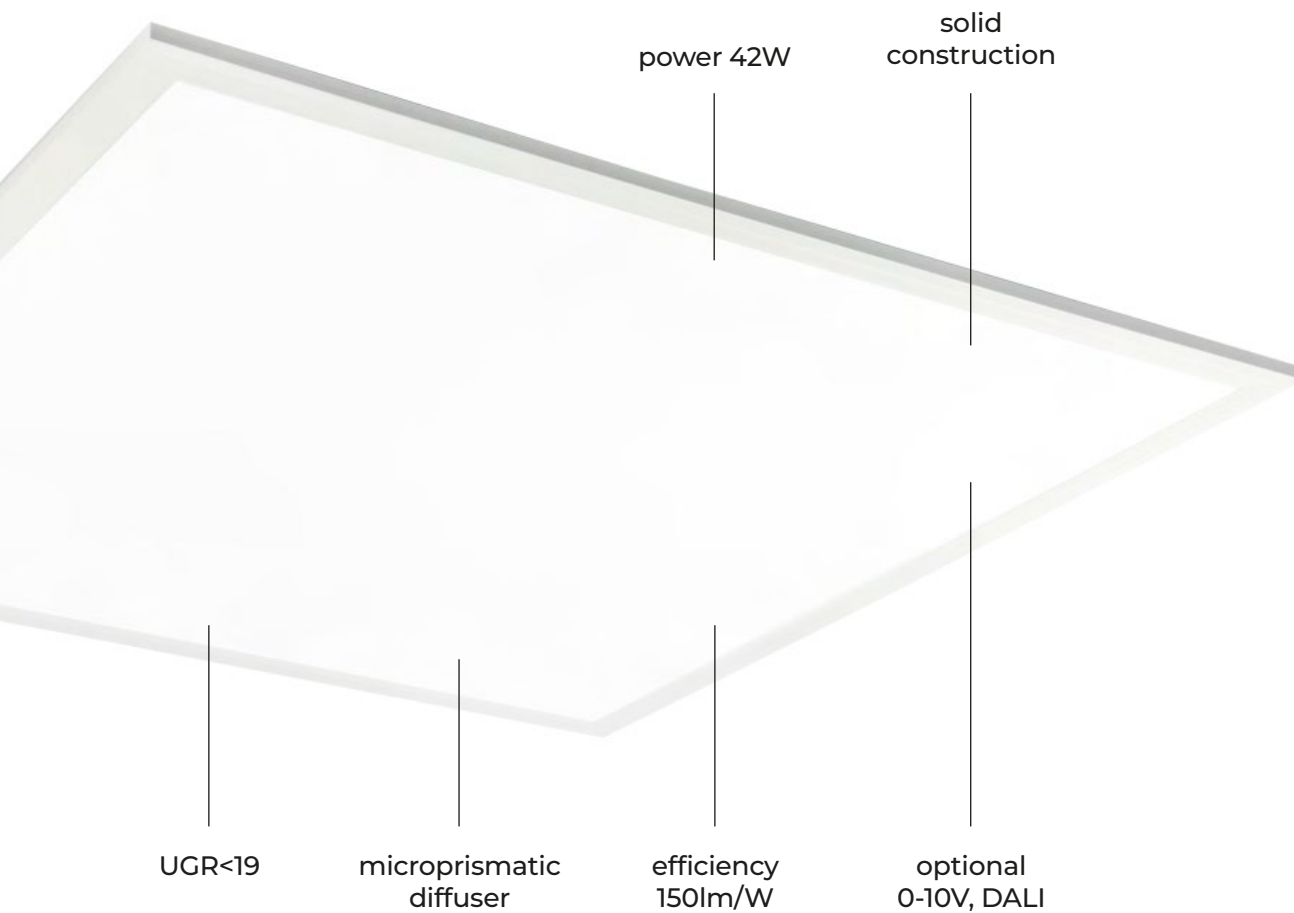

LED PANELS
BACKLIT





**Panel Backlit 4000K
595x595**


5-year warranty	SMD 2835	flicker free	ON OFF 25000	120°	MAX -25 ÷ 45	voltage 220-240V AC	142 lm W	PF 0,9	IP20
DALI optionally	18	YELLOW FREE™	PZH	*.IES	polystyrene	aluminum	75000 h L70B50	72 LED	

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
205970	Panel Backlit 25W 4000K 4000lm 595x595	120°	25W	4000K	4000lm
205987	Panel Backlit 25W 4000K 4000lm 595x595 0-10V	120°	25W	4000K	4000lm
205819	Panel Backlit 34W 4000K 4760lm 595x595	90°	34W	4000K	4000lm
205826	Panel Backlit 34W 4000K 4760lm 595x595 0-10V	120°	34W	4000K	4000lm
200180	Panel Backlit 40W 4000K 4800lm 595x595	120°	40W	4000K	4800lm
201248	Panel Backlit 40W 4000K 4800lm 595x595 0-10V	120°	40W	4000K	4800lm




**Panel Backlit 4000K
595x595 UGR<19**


5-year warranty	 optionally	SMD 2835	 flicker free	 ON OFF 50000	 90 °	 MAX -20 ÷ 40	voltage 220-240V AC	140 lm W	PF 0,9	IP 20
 18	YELLOW FREE™	 PZH www.pzh.eu	*.IES 	 polystyrene	 aluminum	 75000 h L70B50	 72 LED	 IK 02		

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
205833	Panel Backlit 34W 4000K 4760lm UGR<19 595x595	90°	34W	4000K	4760lm
205864	Panel Backlit 34W 4000K 4760lm UGR<19 595x595 0-10V	90°	34W	4000K	4760lm
203457	Panel Backlit 42W 4000K 6300lm UGR<19 595x595	90°	42W	4000K	6300lm


Panel Backlit 40W 4800lm 4000K UGR<19 1195x295



LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
201330	Panel Backlit 40W 4000K 4800lm 1195x295	120°	40W	4000K	4800lm



Panel Backlit 34W 4760lm 4000K 1195x295



LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
206519	Panel Backlit 34W 4000K 4760lm UGR<19 1195x295	120°	34W	4000K	4760lm
206526	Panel Backlit 34W 4000K 4760lm UGR<19 1195x295 0-10V	120°	34W	4000K	4760lm

Panel Backlit 34W 4760lm UGR<19 620x620

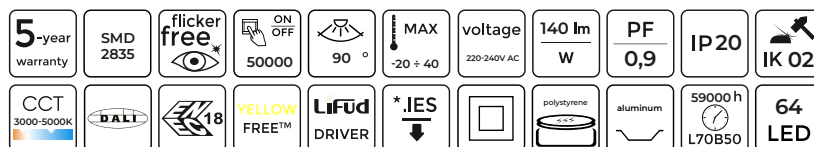

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
204522	Panel Backlit 34W 4000K 4760lm UGR<19 620x620	90°	34W	4000K	4760lm
204539	Panel Backlit 34W CCT 4760lm UGR<19 620x620	90°	34W	3000-5000K	4760lm

Panel Backlit 40W 4000K
4000lm 595x595



3-year warranty

ON OFF
25000

120°

MAX
-25 ÷ 45

voltage
220-240V AC

120 lm
W

PF
0,9

IP20

IK 02

SMD LED 2835

flicker free

PZMA


*.IES

polystyrene

aluminum

30000 h
L70B50

48 LED




LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
202887	Panel Backlit 40W 4000K 4000lm 595x595	120°	40W	4000K	4000lm



LED PANELS
ACCESSORIES


Surface mounting frame 60x60
white H65mm



LED line PRIME

SYMBOL	NAME	COMPATIBLE PRODUCTS	SIZE	COLOUR
203440	Surface mounting frame high 65mm 60x60	BACKLIT, SLIM, DIORA	600x600	white


Spring holders for Backlit panels



LED line PRIME

SYMBOL	NAME	QUANTITY
201347	Spring holders for Backlit panels	4 pcs

Spring holders for SLIM panels



LED line PRIME

SYMBOL	NAME	QUANTITY
245725	Springs for SLIM Panel, 2in1 Panels, Frame Panel and DIORA	4 pcs


Hooks for panels



LED line PRIME

SYMBOL	NAME	QUANTITY
245718	Hooks for panels	6 pcs

Suspension wires



LED line PRIME



SYMBOL	NAME
245701	Suspension wires



DOWNLIGHT
QUANTUM

QUANTUM 7W 4000K 700lm IP20

5-year warranty	DIMMABLE	LiFud DRIVER	III	88 mm	ON OFF	60°	MAX -5 + 40	voltage AC 220-240	100 lm W	IP20
LOW UGR	NARROW BEAM ANGLE	COB	aluminum	polycarbonate	50000 h L70B50	PF 0,8	PF 0,58	1 LED	IK 03	





LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
477392	QUANTUM downlight 7W 700lm 4000K	60°	7W	4000K	700lm
477477	QUANTUM downlight 7W 700lm 4000K 1-10V	60°	7W	4000K	700lm

QUANTUM 15W 4000K 1500lm IP20

5-year warranty	DIMMABLE	LiFud DRIVER	III	115 mm	ON OFF	60°	MAX -5 + 40	voltage AC 220-240	100 lm W	IP20
LOW UGR	NARROW BEAM ANGLE	COB	aluminum	polycarbonate	50000 h L70B50	PF 0,9	PF 0,7	1 LED	IK 03	



LED line PRIME



SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
477408	QUANTUM Downlight 15W 1500lm 4000K	60°	15W	4000K	1500lm
477484	QUANTUM Downlight 15W 1500lm 4000K 1-10V	60°	15W	4000K	1500lm



DOWNLIGHT
CALMOS

**Downlight CALMOS 18W
4000K 2100lm IP44**

5-year warranty	SMD LED	*.IES	110°	MAX -40 ÷ 45	voltage 220-260 AC	116 lm W	IP44
YELLOW FREE™	flicker free	190 mm	aluminum	polycarbonate	50000 h L70B50	54 LED	IK 04





LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
202122	Downlight CALMOS 18W 4000K 2100lm IP44	110°	18W	4000K	2100lm

**Downlight CALMOS 24W
4000K 2800lm IP44**

5-year warranty	*.IES ↓	 225 mm	 110 °	 ON OFF 50000	 MAX 25 ÷ 40	voltage 170-260V AC	116 lm W	IP44
YELLOW FREE™	flicker free 		aluminum 	polycarbonate 	50000 h L70B50	72 LED	 IK 04	




LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
202139	Downlight CALMOS 24W 4000K 2800lm IP44	110°	24W	4000K	2800lm

Efficiency
100lm/W

power
6 - 24W

CCT version
3000K - 4000K
- 5000K





Flicker
free



Easy instalation
adjustable bracket

surface



recessed

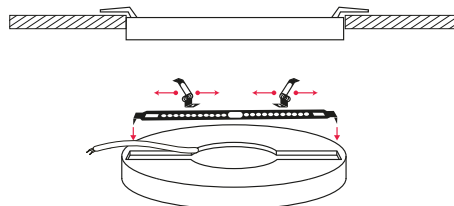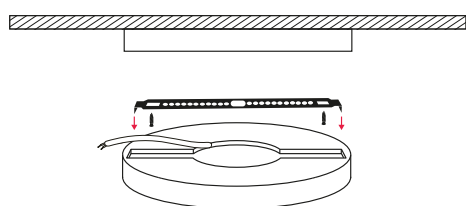

DOWNLIGHT EASY FIX PRO

**EASY FIX PRO downlight
6W CCT round**

3-year warranty	SMD 2835	140 mm	20000	ON OFF	110 °	MAX -20 ÷ +40	voltage 220-240 AC	90 lm W	IP20
*.IES	YELLOW FREE™	ADJUSTABLE BRACKET	flicker free			25000 h L70B50	PF 0,7	112 LED	IK 05





LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
202825	Downlight EASY FIX PRO 6W 540lm CCT round	110°	6W	3000-5000K	540lm

**EASY FIX PRO downlight
12W CCT round**

3-year warranty	*.IES	165 mm	20000	ON OFF	110 °	MAX -20 ÷ +40	voltage 220-240 AC	90 lm W	IP20
SMD 2835	YELLOW FREE™	ADJUSTABLE BRACKET	flicker free			25000 h L70B50	PF 0,7	112 LED	IK 05





LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
202832	Downlight EASY FIX PRO 12W 1080lm CCT round	110°	12W	3000-5000K	1080lm

EASY FIX PRO downlight 18W CCT round



3-year warranty		ADJUSTABLE BRACKET	217 mm	ON OFF	110 °	MAX -20 ÷ +40	voltage 220-240 AC	100 lm W	IP20
SMD 2835	YELLOW FREE™	flicker free				25000 h L70B50	PF 0,7	168 LED	IK 05



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
202849	Downlight EASY FIX PRO 18W 1800lm CCT round	110°	18W	3000-5000K	1800lm



EASY FIX PRO downlight 24W CCT round



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
202856	Downlight EASY FIX PRO 24W 2400lm CCT round	110°	24W	3000-5000K	2400lm



EASY FIX PRO downlight 18W CCT square



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
202863	Downlight EASY FIX PRO 18W 1800lm CCT square	110°	18W	3000-5000K	1800lm

EASY FIX PRO downlight 24W CCT square



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
202870	Downlight EASY FIX PRO 24W 2400lm CCT square	110°	24W	3000-5000K	2400lm

3 -year warranty	* IES ↓		 292 mm	 ON OFF 20000	 110 °	 MAX -20 ÷ 40	voltage 220-240 AC	100 lm W	IP20
SMD 2835	YELLOW FREE™	ADJUSTABLE BRACKET	flicker free		polycarbonate 	25000 h L70B50	PF 0,7	224 LED	 IK 05





DOWNLIGHT
EASY FIX

EASY FIX downlight 6W round



3-year warranty	SMD 2835	ADJUSTABLE BRACKET	113 mm	ON OFF	120°	MAX -5 ÷ +40	voltage 220-260 AC	75-78lm W	IP20
	YELLOW FREE™	GLASS LGP	flicker free		polyamid	polystyrene	30000 h L70B50	PF 0,5	28 LED





LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
248771	Panel Easy Fix 6W 2700K 450lm round	120°	6W	2700K	450lm
248788	Panel Easy Fix 6W 4000K 470lm round	120°	6W	4000K	470lm

EASY FIX downlight 18W round



3-year warranty	SMD 2835	*.IES ↓	ADJUSTABLE BRACKET	215 mm	ON OFF 50000	120 °	MAX -5 ÷ +40	voltage 220-260 AC	87-92lm W	IP20
	YELLOW FREE™		GLASS LGP ★ ★ ★	 flicker free		polyamid 	polystyrene 	30000 h  L70B50	PF 0,7	84 LED





LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
248818	Panel Easy Fix 18W 2700K 1570lm round	120°	18W	2700K	1570lm
248825	Panel Easy Fix 18W 4000K 1650lm round	120°	18W	4000K	1650lm

LED line Panel Easy Fix 24W round



3-year warranty	YELLOW FREE™	*.IES ↓	ADJUSTABLE BRACKET	290 mm	ON OFF 50000	120 °	MAX -5 ÷ +40	voltage 220-260 AC	92-96lm W	IP20
SMD 2835		PMMA LGP •••	flicker free 		polyamid 	polystyrene 	30000 h  L70B50	PF 0,7	112 LED	





LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
248849	Panel Easy Fix 24W 4000K 2300lm round	120°	24W	4000K	2300lm
248832	Panel Easy Fix 24W 2700K 2200lm round	120°	24W	2700K	2200lm

LED line Panel Easy Fix 6W square



3-year warranty	SMD 2835	120°	YELLOW FREE™	*.IES	ON OFF 50000	MAX 120° -5 ÷ 40	voltage 220-260 AC	75-78 lm W	IP20
GLASS LGP	ADJUSTABLE BRACKET	flicker free	polyamid	polystyrene	30000 h L70B50	PF 0,5	28 LED		





LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
246784	Panel Easy Fix 6W 4000K 470lm square	120°	6W	4000K	470lm
246777	Panel Easy Fix 6W 2700K 450lm square	120°	6W	2700K	450lm

LED line Panel Easy Fix 12W square



3-year warranty	SMD 2835	120°	YELLOW FREE™	*.IES	ON OFF 50000	MAX 120° -5 ÷ 40	voltage 220-260 AC	71-74 lm W	IP20
GLASS LGP	ADJUSTABLE BRACKET	flicker free	polyamid	polystyrene	30000 h L70B50	PF 0,5	56 LED		





LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
246890	Panel Easy Fix 12W 4000K 890lm square	120°	12W	4000K	890lm
246791	Panel Easy Fix 12W 2700K 850lm square	120°	12W	2700K	850lm

LED line Panel Easy Fix 18W square



3-year warranty	SMD 2835	120°	YELLOW FREE™	*.IES	ON OFF 50000	MAX 120° -5 ÷ 40	voltage 220-260 AC	72-81 lm W	IP20
GLASS LGP	ADJUSTABLE BRACKET	flicker free	polyamid	polystyrene	30000 h L70B50	PF 0,5	84 LED		



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
249464	Panel Easy Fix 18W 4000K 1450lm square	120°	18W	4000K	1450lm
249457	Panel Easy Fix 18W 2700K 1300lm square	120°	18W	2700K	1300lm

LED line Panel Easy Fix 24W
square

3-year
warranty

SMD
2835

YELLOW
FREE™

*.IES
↓

120°

ON
OFF
50000

MAX
-5 ÷ 40

voltage
220-260 AC

90-96lm
W

IP20

PMMA
LGP
+++

ADJUSTABLE
BRACKET

flicker
free



polyamid

polystyrene

30000 h
L70B50

PF
0,7

112
LED



LED line LITE



SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
249488	Panel Easy Fix 24W 4000K 2300lm square	120°	24W	4000K	2300lm
249471	Panel Easy Fix 24W 2700K 2150lm square	120°	24W	2700K	2150lm



Two mounting versions
in one fixture:

surface


recessed



CCT version
3000K - 4000K - 6000K





32 models
round - and squar - shape

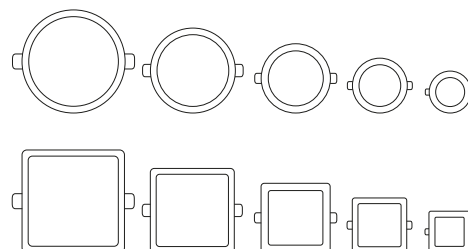

DOWNLIGHT
MOLLY



Downlight MOLLY 5W round



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
200739	Downlight MOLLY 5W 450lm 3000K round	110°	5W	3000K	450lm
200746	Downlight MOLLY 5W 500lm 4000K round	110°	5W	4000K	500lm



Downlight MOLLY 9W round



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
200753	Downlight MOLLY 9W 830lm 3000K round	110°	9W	3000K	830lm
200760	Downlight MOLLY 9W 900lm 4000K round	110°	9W	4000K	900lm

Downlight MOLLY 12W round



LED line LITE




SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
200777	Downlight MOLLY 12W 1150lm 3000K round	110°	12W	3000K	1150lm
200784	Downlight MOLLY 12W 1250lm 4000K round	110°	12W	4000K	1250lm

3-year warranty	*.IES ↓	110°	ON OFF 20000	MAX -20 ÷ +40	30000 h L70B50	voltage 220-240 AC	90-100 lm W	IP20
SMD 2835	YELLOW FREE™	flicker free	95 mm	Polycarbonate	PF 0,5	16 LED		

3-year warranty	*.IES ↓	110°	ON OFF 20000	MAX -20 ÷ +40	30000 h L70B50	voltage 170-260V AC	90-100 lm W	IP20
SMD 2835	YELLOW FREE™	flicker free	120 mm	Polycarbonate	PF 0,5	30 LED		

3-year warranty	*.IES ↓	110°	ON OFF 20000	MAX -20 ÷ +40	30000 h L70B50	voltage 170-260V AC	95-105 lm W	IP20
SMD 2835	YELLOW FREE™	flicker free	120 mm	Polycarbonate	PF 0,5	45 LED		




Downlight MOLLY 18W round



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
200791	Downlight MOLLY 18W 1750lm 3000K round	110°	18W	3000K	1750lm
200807	Downlight MOLLY 18W 1900lm 4000K round	110°	18W	4000K	1900lm
200999	Downlight MOLLY 18W 1900lm CCT 3000-6000K round	110°	18W	3000-6000K	1900lm
201019	Downlight MOLLY 18W 1900lm 4000K round with motion sensor	110°	18W	4000K	1900lm



Downlight MOLLY 24W round

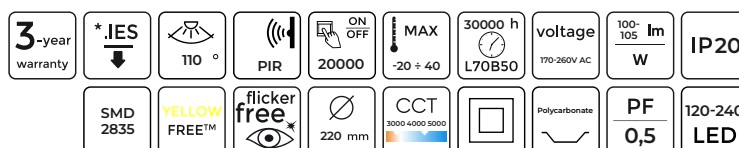

LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
200814	Downlight MOLLY 24W 2350lm 3000K round	110°	24W	3000K	2350lm
200821	Downlight MOLLY 24W 2550lm 4000K round	110°	24W	4000K	2550lm
201002	Downlight MOLLY 24W 2550lm CCT 3000-6000K round	110°	24W	3000-6000K	2550lm
201026	Downlight MOLLY 24W 2550lm 4000K round with motion sensor	110°	24W	4000K	2550lm



Downlight MOLLY 5W square



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
201033	Downlight MOLLY 5W 450lm 3000K square	110°	5W	3000K	450lm
201040	Downlight MOLLY 5W 500lm 4000K square	110°	5W	4000K	500lm



Downlight MOLLY 9W square



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
200838	Downlight MOLLY 9W 830lm 3000K square	110°	9W	3000K	830lm
200845	Downlight MOLLY 9W 900lm 4000K square	110°	9W	4000K	900lm

Downlight MOLLY 12W square



LED line LITE



SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
200852	Downlight MOLLY 12W 1150lm 3000K square	110°	12W	3000K	1150lm
200869	Downlight MOLLY 12W 1250lm 4000K square	110°	12W	4000K	1250lm

3-year warranty	*.IES ↓	ON OFF 20000	MAX -20 ÷ 40	30000 h L70B50	voltage 220-240V AC	90-100lm W	IP20
SMD 2835	YELLOW FREE™	flicker free			Polycarbonate	PF 0,5	30 LED

3-year warranty	SMD 2835	ON OFF 20000	MAX -20 ÷ 40	30000 h L70B50	voltage 170-260V AC	90-100lm W	IP20
	YELLOW FREE™	flicker free			Polycarbonate	PF 0,5	30 LED

3-year warranty	*.IES ↓	ON OFF 20000	MAX -20 ÷ 40	30000 h L70B50	voltage 170-260V AC	95-105lm W	IP20
SMD 2835	YELLOW FREE™	flicker free			Polycarbonate	PF 0,5	56 LED

Downlight MOLLY 18W round





3-year warranty	*.IES ↓	ON OFF 20000	MAX -20 ÷ 40	30000 h L70B50	voltage 170-260V AC	100-105 lm W	IP20
SMD 2835	YELLOW FREE™	flicker free			Polycarbonate	PF 0,5	72 LED

LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
200876	Downlight MOLLY 18W 1750lm 3000K square	110°	18W	3000K	1750lm
200883	Downlight MOLLY 18W 1900lm 4000K square	110°	18W	4000K	1900lm

Downlight MOLLY 24W square



3-year warranty	*.IES ↓	ON OFF 20000	MAX -20 ÷ 40	30000 h L70B50	voltage 170-260V AC	100-105 lm W	IP20
SMD 2835	YELLOW FREE™	flicker free			Polycarbonate	PF 0,5	144 LED

LED line LITE


SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
200890	Downlight MOLLY 24W 2550lm 3000K square	110°	24W	3000K	2350lm
200906	Downlight MOLLY 24W 2550lm 4000K square	110°	24W	4000K	2550lm

Frame for surface mounting of Downlight MOLLY round



LED line LITE

SYMBOL	NAME
200913	Frame for surface mounting of Downlight MOLLY 9W round
200920	Frame for surface mounting of Downlight MOLLY 12W round
200937	Frame for surface mounting of Downlight MOLLY 18W round
200944	Frame for surface mounting of Downlight MOLLY 24W round

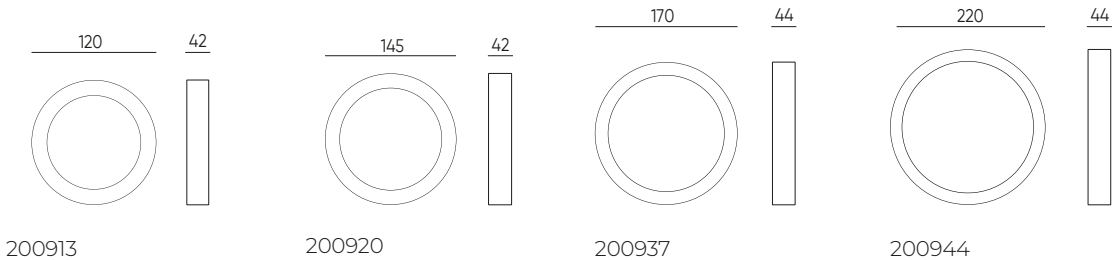



Frame for surface mounting of Downlight MOLLY square



LED line LITE


SYMBOL	NAME
200951	Frame for surface mounting of Downlight MOLLY 9W square
200968	Frame for surface mounting of Downlight MOLLY 12W square
200975	Frame for surface mounting of Downlight MOLLY 18W square
200982	Frame for surface mounting of Downlight MOLLY 24W square

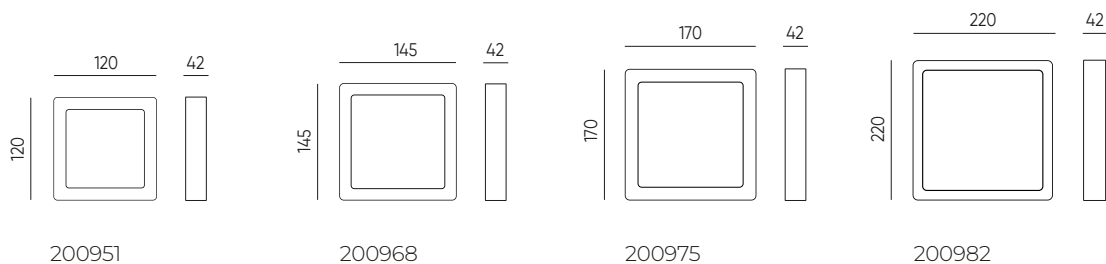

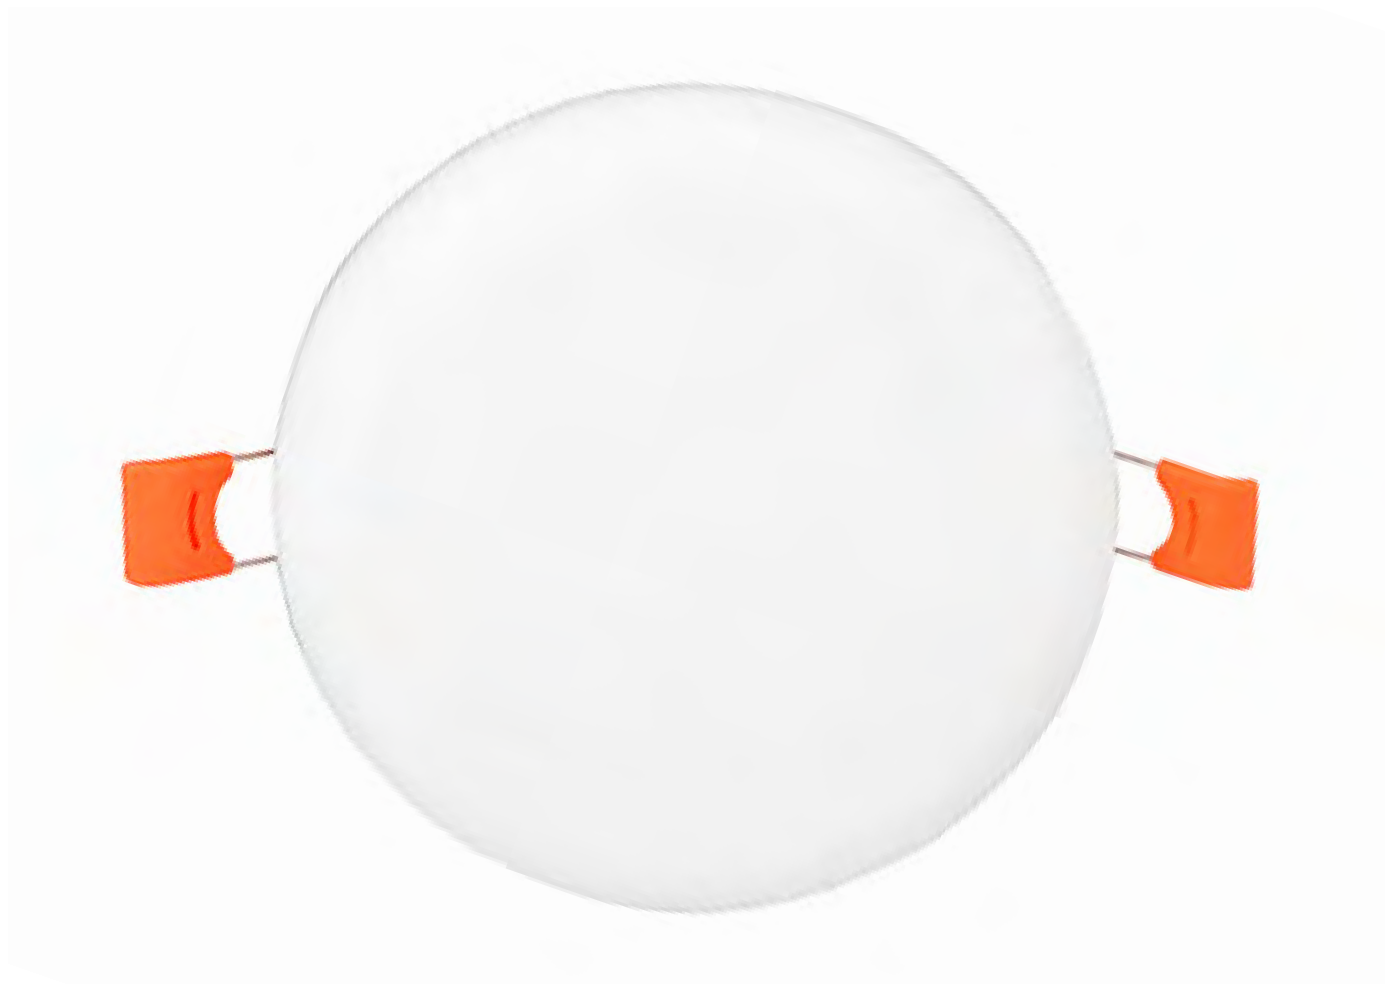

DOWNLIGHT
FRAMELESS

FRAMELESS panel 8W 800lm




2-year warranty	SMD 2835	ON OFF 50000	MAX -5 ÷ 40	90 mm	voltage 220-240V AC	100 lm W	IP20
30000 h L70B50		180°	polycarbonate	aluminum	PF 0,9	45 LED	



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
470614	FRAMELESS panel 8W 2700K 800lm	180°	8W	2700K	800lm
470621	FRAMELESS panel 8W 4000K 800lm	180°	8W	4000K	800lm

FRAMELESS panel 18W 1800lm



2-year warranty	SMD 2835	ON OFF 50000	MAX -5 ÷ 40	120 mm	voltage 220-240V AC	100 lm W	IP20
30000 h L70B50		180°	polycarbonate	aluminum	PF 0,9	90 LED	





LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS
470638	FRAMELESS panel 18W 2700K 1800lm	180°	18W	2700K	1800lm
470645	FRAMELESS panel 18W 4000K 1800lm	180°	18W	4000K	1800lm



LED SPOTLIGHTS
PIPE



Luminaire for single-phase track GU10 PIPE



LED line LITE

SYMBOL	NAME	FIXTURE COLOR	SHAPE	MOUNTING TYPE	FEATURE	MATERIAL
478252	LED line® downlight recessed-mounted square white CUBO MIDI	black	round	track	adjustable	aluminium
475442	LED line luminaire for single-phase track GU10 white PIPE	white	round	track	adjustable	aluminium




Luminaire for single-phase track GU10 PIPE

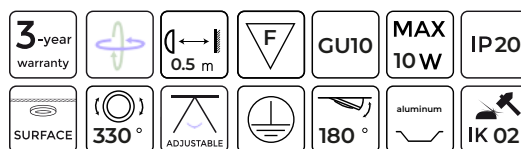

LED line LITE

SYMBOL	NAME	FIXTURE COLOR	SHAPE	MOUNTING TYPE	FEATURE	MATERIAL
478276	LED line surface mounted luminaire GU10 black PIPE	black	round	surface	adjustable	aluminium
478283	LED line surface mounted luminaire GU10 white PIPE	white	round	surface	adjustable	aluminium

Luminaire for single-phase track GU10 PIPE



LED line LITE

SYMBOL	NAME	FIXTURE COLOR	SHAPE	MOUNTING TYPE	MATERIAL
478290	LED line pendant luminaire GU10 black PIPE	black	round	suspended	aluminium
478306	LED line pendant luminaire GU10 white PIPE	white	round	suspended	aluminium

high efficiency
up to 140lm/W

glass
diffuser



ceramic
housing

perfect heat
dissipation

LED LIGHT SOURCE CERAMIC



E27



E14



GU10



GU11



MR16




MR11

LED light source CERAMIC E14 5W 170-250V C37 140lm/W



5-year warranty	220°	ON OFF 50000	C37	30000 h L70B50	voltage 170-250V AC	140 lm W	IP20
GOOD HEAT DISSIPATION	flicker free	37 mm	SMD 2835	glass	ceramic	PF 0,5	




LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
201606	LED lighting source E14 5W 2700K 700lm 170-250V C37 Candle	220°	5W	2700K	700lm	E14	ceramic
201613	LED lighting source E14 5W 4000K 700lm 170-250V C37 Candle	220°	5W	4000K	700lm	E14	ceramic
201620	LED lighting source E14 5W 6500K 700lm 170-250V C37 Candle	220°	5W	6500K	700lm	E14	ceramic

LED light source CERAMIC E14 7W 170-250V C37 140lm/W



5-year warranty	220°	ON OFF 50000	C37	30000 h L70B50	voltage 170-250V AC	142 lm W	IP20
GOOD HEAT DISSIPATION	flicker free	37 mm	SMD 2835	glass	ceramic	PF 0,5	



LED line PRIME


SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
247576-II	LED lighting source E14 7W 2700K 1000lm 170-250V C37 Candle	220°	7W	2700K	1000lm	E14	ceramic
247583-II	LED lighting source E14 7W 4000K 1000lm 170-250V C37 Candle	220°	7W	4000K	1000lm	E14	ceramic
201651	LED lighting source E14 7W 6500K 1000lm 170-250V C37 Candle	220°	7W	6500K	1000lm	E14	ceramic

LED light source CERAMIC E14 9W 170-250V C37 140lm/W



LED line PRIME

5-year warranty	220°	ON OFF 50000	C37	30000 h L70B50	voltage 170-250V AC	140 lm W	IP20
SMD 2835	GOOD HEAT DISSIPATION	flicker free	37 mm	SMD 2835	glass	ceramic	PF 0,5




SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
248610-II	LED light source E14 9W 2700K 1260lm 170-250V C37 Candle	220°	9W	2700K	1260lm	E14	ceramic
248627-II	LED light source E14 9W 4000K 1260lm 170-250V C37 Candle	220°	9W	4000K	1260lm	E14	ceramic
201682	LED light source E14 9W 6500K 1260lm 170-250V C37 Candle	220°	9W	6500K	1260lm	E14	ceramic

LED light source CERAMIC E14 9W 170-250V C37 130lm/W DIMMABLE



LED line PRIME

5-year warranty	C37	220°	ON OFF 50000	30000 h L70B50	voltage 170-250V AC	130 lm W	IP20
GOOD HEAT DISSIPATION	TRIAC	35 mm	SMD 2835	glass	ceramic	PF 0,7	



SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
470232-II	LED light source E14 9W 2700K 1170lm 170-250V C37 DIM	220°	9W	2700K	1170lm	E14	ceramic
470249-II	LED light source E14 9W 4000K 1170lm 170-250V C37 DIM	220°	9W	4000K	1170lm	E14	ceramic

LED light source CERAMIC E14 7W 170-250V G45 140lm/W



LED line PRIME

5-year warranty	220°	ON OFF 50000	G45	30000 h L70B50	voltage 170-250V AC	142 lm W	IP20
GOOD HEAT DISSIPATION	flicker free	45 mm	SMD 2835	glass	ceramic	PF 0,5	



SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
201729	LED lighting source E14 7W 2700K 1000lm 170-250V G45 Globe	220°	7W	2700K	1000lm	E14	ceramic
201736	LED lighting source E14 7W 4000K 1000lm 170-250V G45 Globe	220°	7W	4000K	1000lm	E14	ceramic
201743	LED lighting source E14 7W 6500K 1000lm 170-250V G45 Globe	220°	7W	6500K	1000lm	E14	ceramic

LED light source CERAMIC E27 7W 170-250V G45 140lm/W



5-year warranty	220°	ON OFF 50000	G45	30000 h L70B50	voltage 170-250V AC	142 lm W	IP20
GOOD HEAT DISSIPATION	flicker free	45 mm	SMD 2835	glass	ceramic	PF 0,5	




LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
247590-II	LED lighting source E27 7W 2700K 1000lm 170-250V G45 Globe	220°	7W	2700K	1000lm	E27	ceramic
247606-II	LED lighting source E27 7W 4000K 1000lm 170-250V G45 Globe	220°	7W	4000K	1000lm	E27	ceramic
201774	LED light source E27 7W 6500K 1000lm 170-250V G45 Globe	220°	7W	6500K	1000lm	E27	ceramic

LED light source CERAMIC E27 6W 170-250V A60 140lm/W



5-year warranty	280°	ON OFF 50000	A60	30000 h L70B50	voltage 170-250V AC	140 lm W	IP20
GOOD HEAT DISSIPATION	flicker free	60 mm	SMD 2835	glass	ceramic	PF 0,5	





LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
201781	LED lighting source E27 6W 2700K 840lm 170-250V A60	280°	6W	2700K	840lm	E27	ceramic
201798	LED lighting source E27 6W 4000K 840lm 170-250V A60	280°	6W	4000K	840lm	E27	ceramic
201804	LED lighting source E27 6W 6500K 840lm 170-250V A60	280°	6W	6500K	840lm	E27	ceramic

LED light source CERAMIC E27 10W 170-250V A60 140lm/W



LED line PRIME


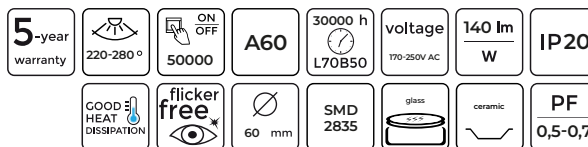


SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
241710-II	LED light source E27 10W 2700K 1400lm 170-250V A60	280°	10W	2700K	1400lm	E27	ceramic
241727-II	LED lighting source E27 10W 4000K 1400lm 170-250V A60	280°	10W	4000K	1400lm	E27	ceramic
201835	LED lighting source E27 10W 6500K 1400lm 170-250V A60	280°	10W	6500K	1400lm	E27	ceramic

LED light source CERAMIC E27 13W 170-250V A60 140lm/W



LED line PRIME



SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
241734-II	LED light source E27 13W 2700K 1820lm 170-250V A60	280°	13W	2700K	1820lm	E27	ceramic
241772-II	LED light source E27 13W 4000K 1820lm 170-250V A60	280°	13W	4000K	1820lm	E27	ceramic

LED light source CERAMIC GU10 5W 170-250V 140lm/W



LED line PRIME




SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
201453	LED light source GU10 5W 2700K 700lm 170-250V	120°	5W	2700K	700lm	GU10	ceramic
201460	LED light source GU10 5W 4000K 700lm 170-250V	120°	5W	4000K	700lm	GU10	ceramic
201477	LED light source GU10 5W 6500K 700lm 170-250V	120°	5W	6500K	700lm	GU10	ceramic

LED light source CERAMIC GU10 7W 170-250V 142lm/W



5-year warranty	120°	ON OFF 50000	30000 h L70B50	voltage 170-250V AC	142 lm W	IP20
GOOD HEAT DISSIPATION	flicker free	50 mm	GU10	SMD 2835	ceramic	PF 0,5




LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
247613-II	LED light source GU10 7W 2700K 1000lm 170-250V	120°	7W	2700K	1000lm	GU10	ceramic
247620-II	LED light source GU10 7W 4000K 1000lm 170-250V	120°	7W	4000K	1000lm	GU10	ceramic
240737-II	LED light source GU10 7W 6500K 1000lm 170-250V	120°	7W	6500K	1000lm	GU10	ceramic

LED light source CERAMIC GU10 10W 170-250V 140lm/W



5-year warranty	ON OFF 50000	45-50 mm	30000 h L70B50	voltage 170-250V AC	140 lm W	IP20
120°	GOOD HEAT DISSIPATION	flicker free	GU10	SMD 2835	ceramic	PF 0,5




LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
248580-II	LED light source GU10 10W 2700K 1400lm 170-250V	120°	10W	2700K	1400lm	GU10	ceramic
248597-II	LED light source GU10 10W 4000K 1400lm 170-250V	120°	10W	4000K	1400lm	GU10	ceramic
248603-II	LED light source GU10 10W 6500K 1400lm 170-250V	120°	10W	6500K	1400lm	GU10	ceramic
470218-II	LED light source GU10 10W 2700K 1250lm 170-250V DIM	120°	10W	2700K	1250lm	GU10	ceramic
470225-II	LED light source GU10 10W 4000K 1250lm 170-250V DIM	120°	10W	4000K	1250lm	GU10	ceramic

LED light source CERAMIC GU11 3W 170-250V 110lm/W

5-year warranty	ON OFF 50000	35 mm	30000 h L70B50	voltage 170-250V AC	110 lm W	IP20
38°	GOOD HEAT DISSIPATION	flicker free	GU11	SMD 2835	ceramic	PF 0,5




LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
248108-II	LED light source CERAMIC GU11 3W 170-250V 110lm/W	38°	3W	2700K	330lm	GU11	ceramic
248122-II	LED light source CERAMIC GU11 3W 4000K 330lm	38°	3W	4000K	330lm	GU11	ceramic
248115-II	LED CERAMIC light source GU11 3W 6500K 330lm	38°	3W	6500K	330lm	GU11	ceramic

LED light source CERAMIC MR16 3W 10-14V AC/DC 110lm/W



5-year warranty	 38 °C	 ON OFF 50000	30000 h L70B50	voltage 10-14V AC/DC	110 lm W	IP20
GOOD HEAT DISSIPATION	 flicker free 	 35 mm	MRT11	 ceramic	PF 0,5	



LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
248139-II	LED light source CERAMIC MR16 3W 2700K 330lm 10-14V	38°	3W	2700K	330lm	MR11	ceramic
248146-II	LED light source CERAMIC MR16 3W 4000K 330lm 10-14V	38°	3W	4000K	330lm	MR11	ceramic
248153-II	LED light source CERAMIC MR16 3W 6500K 330lm 10-14V	38°	3W	6500K	330lm	MR11	ceramic



LED light source CERAMIC MR16 5W 10-18V AC/DC 120lm/W

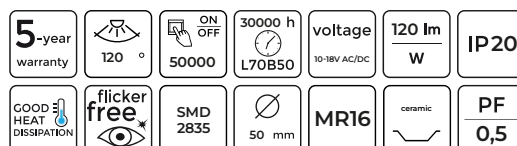

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
201903	LED LIGHT CERAMIC MR16 5W 2700K 600lm 10-18V	120°	5W	2700K	600lm	MR16	ceramic
201910	LED LIGHT CERAMIC MR16 5W 4000K 600lm 10-18V	120°	5W	4000K	600lm	MR16	ceramic
201927	LED LIGHT CERAMIC MR16 5W 6500K 600lm 10-18V	120°	5W	6500K	600lm	MR16	ceramic




LED light source CERAMIC MR16 8,5W 10-18V AC/DC 120lm/W

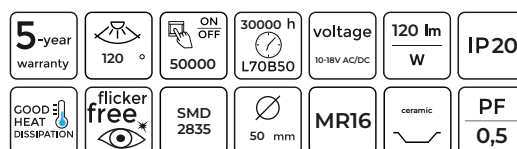

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
201934	LED light source CERAMIC MR16 8,5W 2700K 1020lm 10-18V	120°	8,5W	2700K	1020lm	MR16	ceramic
201941	LED light source CERAMIC MR16 8,5W 4000K 1020lm 10-18V	120°	8,5W	4000K	1020lm	MR16	ceramic
201958	LED light source CERAMIC MR16 8,5W 6500K 1020lm 10-18V	120°	8,5W	6500K	1020lm	MR16	ceramic




LED light source CERAMIC SMD 5W 170-250V

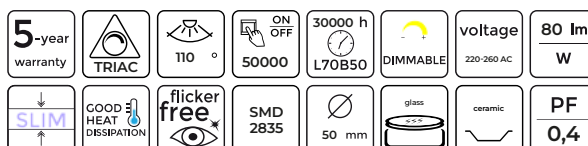

LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL	DIM
247286	LED light source SMD 5W 2700K 400lm 220-260V 50mm	110°	5W	2700K	400lm	SMD	ceramic	NO
470720	LED light source SMD 5W 2700K 400lm 220-260V 50mm DIM	110°	5W	2700K	400lm	SMD	ceramic	TRIAC
247293	LED light source SMD 5W 4000K 400lm 220-260V 50mm	110°	5W	4000K	400lm	SMD	ceramic	NO
470737	LED light source SMD 5W 4000K 400lm 220-260V 50mm DIM	110°	5W	4000K	400lm	SMD	ceramic	TRIAC
470560	LED light source SMD 5W 6500K 400lm 220-260V 50mm	110°	5W	6500K	400lm	SMD	ceramic	NO
470744	LED light source SMD 5W 6500K 400lm 220-260V 50mm DIM	110°	5W	6500K	400lm	SMD	ceramic	TRIAC


LED light source CERAMIC G9 4W 170-250V




LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
245480	LED light source G9 4W 2700K 350lm 220-240V	270°	4W	2700K	350lm	G9	ceramic
245534	LED light source G9 4W 4000K 350lm 220-240V	270°	4W	4000K	350lm	G9	ceramic
245541	LED light source G9 4W 6000K 350lm 220-240V	270°	4W	6000K	350lm	G9	ceramic

LED light source CERAMIC G9 6W 170-250V




3-year warranty	270°	ON OFF 50000	30000 h L70B50	voltage 220-240 AC	92 lm W
GOOD HEAT DISSIPATION	SMD 2835	16 mm	ceramic	PF 0,5	




LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
245947	LED lighting source G9 6W 2700K 550lm 220-240V	270°	6W	2700K	550lm	G9	ceramic
245954	LED lighting source G9 6W 4000K 550lm 220-240V	270°	6W	4000K	550lm	G9	ceramic
245961	LED lighting source G9 6W 6000K 550lm 220-240V	270°	6W	6000K	550lm	G9	ceramic

LED light source CERAMIC G9 8W 170-250V






3-year warranty	270°	ON OFF 50000	30000 h L70B50	voltage 220-240 AC	94 lm W
GOOD HEAT DISSIPATION	SMD 2835	19 mm	ceramic	PF 0,5	



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
247903	LED lighting source G9 8W 2700K 750lm 220-240V	270°	8W	2700K	750lm	G9	ceramic
247910	LED lighting source G9 8W 4000K 750lm 220-240V	270°	8W	4000K	750lm	G9	ceramic
247927	LED lighting source G9 8W 6000K 750lm 220-240V	270°	8W	6000K	750lm	G9	ceramic

LED light source CERAMIC G9 12W 170-250V

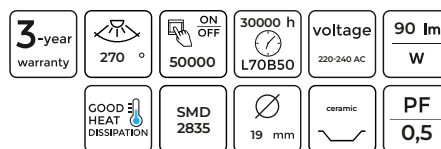




LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
248900	LED lighting source G9 12W 2700K 1160lm 220-240V	270°	12W	2700K	1160lm	G9	ceramic
248917	LED lighting source G9 12W 4000K 1160lm 220-240V	270°	12W	4000K	1160lm	G9	ceramic
248924	LED lighting source G9 12W 6000K 1160lm 220-240V	270°	12W	6000K	1160lm	G9	ceramic



LED LIGHT SOURCES GLASS




LED light source GLASS GU10 1W 220-240V



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
242250	LED lighting source GU10 1W 2700K 80lm 220-260V	120°	1W	2700K	80lm	GU10	glass
248337	LED lighting source GU10 1W 4000K 80lm 220-260V	120°	1W	4000K	80lm	GU10	glass
242267	LED lighting source GU10 1W 6500K 80lm 220-260V	120°	1W	6500K	80lm	GU10	glass




LED light source GLASS GU10 1W 220-240V



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
242298	LED lighting source GU10 1W 20lm 220-260V green	120°	1W	GREEN 520nm	20lm	GU10	glass
242281	LED lighting source GU10 1W 20lm 220-260V blue	120°	1W	BLUE 465nm	20lm	GU10	glass



LED light source GLASS GU10 3W 220-260V



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
247835	LED lighting source GU10 3W 2700K 273lm 220-260V 36°	36°	3W	2700K	273lm	GU10	glass
247828	LED lighting source GU10 3W 4000K 273lm 220-260V 36°	36°	3W	4000K	273lm	GU10	glass
247811	LED lighting source GU10 3W 6500K 273lm 220-260V 36°	36°	3W	6500K	273lm	GU10	glass




LEDlight source GLASS GU10 5W 220-260V 120°



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
241963	LED lighting source GU10 5W 2700K 450lm 220-260V 120°	120°	5W	2700K	450lm	GU10	glass
241970	LED lighting source GU10 5W 4000K 450lm 220-260V 120°	120°	5W	4000K	450lm	GU10	glass
241987	LED lighting source GU10 5W 6500K 450lm 220-260V 120°	120°	5W	6500K	450lm	GU10	glass




LED light source GLASS GU10 5,5W 220-260V 50° DIMMABLE



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
240621	LED lighting source M16 5,5W 2700K 500lm 220-240V DIM	60°	5,5W	2700K	500lm	GU10	glass
240638	LED lighting source M16 5,5W 4000K 550lm 220-240V DIM	60°	5,5W	4000K	550lm	GU10	glass




LED light source GLASS GU10 5,5W 220-260V 60° DIM TO WARM



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
248948	LED lighting source GU10 5,5W 2200-3000K 345lm 220-240V	60°	5,5W	2200-3000K	345lm	GU10	glass

LED light source GLASS MR11 3W 10-14V 36°



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
247804	LED lighting source MR11 3W 2700K 273lm 10-14V AC/DC 36°	36°	3W	2700K	273lm	MR11	glass
247798	LED lighting source MR11 3W 4000K 273lm 10-14V AC/DC 36°	36°	3W	4000K	273lm	MR11	glass
247781	LED lighting source MR11 3W 6500K 273lm 10-14V AC/DC 36°	36°	3W	6500K	273lm	MR11	glass

wide selection
in the range

glass diffuser, better
light dispersion

best dimming function
on the market

wide selection
in the range



LED LIGHT SOURCES
FILAMENT

LED light source FILAMENT E27 4W 220-240V A60 210lm/W



LED line PRIME

SYMBOL	NAME	POWER	CCT	LUMINOUS	SHAPE	TYPE
202344	LED lighting source FILAMENT E27 4W 4000K 840lm 220-240V A60 GLOBE	4W	4000K	840lm	A60	E27

LED light source FILAMENT E27 7W 220-240V A60 210lm/W



LED line PRIME

SYMBOL	NAME	POWER	CCT	LUMINOUS	SHAPE	TYPE
202351	LED lighting source FILAMENT E27 7W 4000K 1470lm 220-240V A60 GLOBE	7W	4000K	1470lm	A60	E27

LED light source FILAMENT E27 4W 220-240V ST64 RETRO




LED line PRIME

SYMBOL	NAME	POWER	CCT	LUMINOUS	SHAPE	TYPE
202405	LED lighting source FILAMENT E27 4W 1800K 210lm 220-240V ST64 RETRO VINTAGE GOLD DIMMABLE	4W	1800K	210lm	ST64	E27
202412	LED lighting source FILAMENT E27 4W 1800K 210lm 220-240V ST64 RETRO VINTAGE GRAPHITE DIMMABLE	4W	1800K	150lm	ST64	E27
202399	LED lighting source FILAMENT E27 4W 1800K 210lm 220-240V ST64 RETRO VINTAGE VINTAGE DIMMABLE	4W	1800K	230lm	ST64	E27

LED light source FILAMENT E27 4W
220-240V G125 RETRO



LED line PRIME

SYMBOL	NAME	POWER	CCT	LUMINOUS	SHAPE	TYPE
202375	LED lighting source FILAMENT E27 4W 1800K 210lm 220-240V G125 RETRO VINTAGE GOLD DIMMABLE	4W	1800K	210lm	G125	E27
202382	LED lighting source FILAMENT E27 4W 1800K 210lm 220-240V G125 RETRO VINTAGE GRAPHITE DIMMABLE	4W	1800K	150lm	G125	E27
202368	LED lighting source FILAMENT E27 4W 1800K 210lm 220-240V G125 RETRO VINTAGE VINTAGE DIMMABLE	4W	1800K	230lm	G125	E27

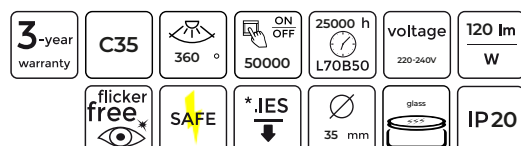LED light source FILAMENT E14 4W
220-240V C35


LED line LITE


SYMBOL	NAME	POWER	CCT	LUMINOUS	SHAPE	TYPE
202184	LED lighting source FILAMENT E14 4W 2700K 480lm 220-240V C35 CANDLE	4W	2700K	480lm	C35	E14
202191	LED lighting source FILAMENT E14 4W 4000K 480lm 220-240V C35 CANDLE	4W	4000K	480lm	C35	E14

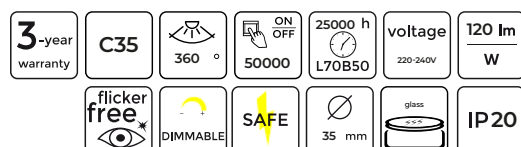LED FILAMENT light source E14 5W
220-240V C35 DIM


LED line LITE

SYMBOL	NAME	POWER	CCT	LUMINOUS	SHAPE	TYPE
202306	LED lighting source FILAMENT E14 5W 2700K 600lm 220-240V C35 CANDLE DIMMABLE	5W	2700K	600lm	C35	E14
202313	LED lighting source FILAMENT E14 5W 4000K 600lm 220-240V C35 CANDLE DIMMABLE	5W	4000K	600lm	C35	E14


LED light source FILAMENT E14 6W 220-240V C35

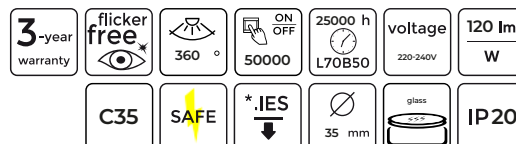

LED line LITE

SYMBOL	NAME	POWER	CCT	LUMINOUS	SHAPE	TYPE
202207	LED lighting source FILAMENT E14 6W 2700K 720lm 220-240V C35 CANDLE	6W	2700K	720lm	C35	E14
202214	LED lighting source FILAMENT E14 6W 4000K 720lm 220-240V C35 CANDLE	6W	4000K	720lm	C35	E14

LED light source FILAMENT E14 6W 220-240V G45



LED line LITE


SYMBOL	NAME	POWER	CCT	LUMINOUS	SHAPE	TYPE
202221	LED lighting source FILAMENT E14 7W 2700K 840lm 220-240V G45 GLOBE	4W	2700K	480lm	G45	E14
202238	LED lighting source FILAMENT E14 7W 4000K 840lm 220-240V G45 GLOBE	4W	4000K	480lm	G45	E14

LED light source FILAMENT E27 4W 220-240V A60




LED line LITE

SYMBOL	NAME	POWER	CCT	LUMINOUS	SHAPE	TYPE
202269	LED lighting source FILAMENT E27 4W 2700K 480lm 220-240V A60 GLOBE	7W	2700K	840lm	A60	E27
202276	LED lighting source FILAMENT E27 4W 4000K 480lm 220-240V A60 GLOBE	7W	4000K	840lm	A60	E27

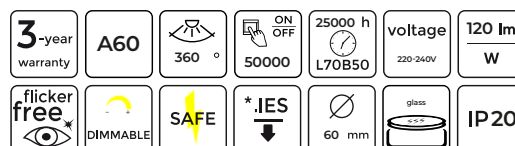**LED light source FILAMENT E27 7W
220-240V A60 DIMMABLE**


LED line LITE

SYMBOL	NAME	POWER	CCT	LUMINOUS	SHAPE	TYPE
202320	LED lighting source FILAMENT E27 7W 2700K 840lm 220-240V A60 GLOBE DIMMABLE	7W	2700K	840lm	A60	E27
202337	LED lighting source FILAMENT E27 7W 4000K 840lm 220-240V A60 GLOBE DIMMABLE	7W	4000K	840lm	A60	E27

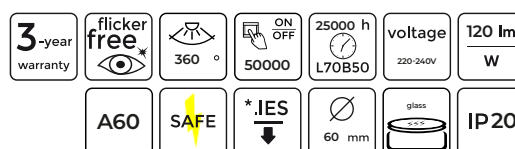**LED light source FILAMENT E27 10W
220-240V A60**



LED line LITE

SYMBOL	NAME	POWER	CCT	LUMINOUS	SHAPE	TYPE
202283	LED lighting source FILAMENT E27 4W 2700K 480lm 220-240V A60 GLOBE	10W	2700K	1200lm	A60	E27
202290	LED lighting source FILAMENT E27 4W 4000K 480lm 220-240V A60 GLOBE	10W	4000K	1200lm	A60	E27



LED LIGHT SOURCES
BASIC

LED light source BASIC E27 6W 220-260V A60




3-year warranty	240°	50000 h L70B50	voltage 220-240 AC	85 lm W
45 mm	PVC	ON OFF 50000	PF 0,5	



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
247255	LED light source E27 6W 3000K 510lm 220-260V A60	240°	6W	3000K	510lm	E27	PLASTIC
247262	LED light source E27 6W 4000K 510lm 220-260V A60	240°	6W	4000K	510lm	E27	PLASTIC

LED light source BASIC E27 10W 220-260V A60




3-year warranty	240°	30000 h L70B50	voltage 220-240 AC	91 lm W
60 mm	PVC	ON OFF 50000	PF 0,5	



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
247385	LED light source E27 10W 3000K 940lm 220-260V A60	240°	10W	3000K	940lm	E27	PLASTIC
247392	LED light source E27 10W 4000K 940lm 220-260V A60	240°	10W	4000K	940lm	E27	PLASTIC

LED light source BASIC E27 15W 220-260V A60



3-year warranty	240°	50000 h L70B50	voltage 220-240 AC	101 lm W
60 mm	PVC	ON OFF 50000	PF 0,5	




LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
247422	LED light source E27 15W 3000K 1515lm 220-260V A60	240°	15W	3000K	1515lm	E27	PLASTIC
247439	LED light source E27 15W 4000K 1515lm 220-260V A60	240°	15W	4000K	1515lm	E27	PLASTIC

LED light source BASIC E27 1W 220-260V G45

3-year warranty	50000 h L70B50	voltage 220-240 AC	80 lm W
270 °	45 mm	ON OFF 50000	PF 0,5




LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
470317	LED light source E27 1W 3000K 80lm 220-260V G45	270°	1W	3000K	80lm	E27	PLASTIC

LED light source BASIC E14 6W 220-240V C37

3-year warranty	50000 h L70B50	voltage 220-240 AC	87 lm W
180 °	37 mm	ON OFF 50000	PF 0,5




LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
247354	LED light source E14 6W 3000K 522lm 220-240V C37	180°	6W	3000K	522lm	E14	PLASTIC
470317	LED light source E14 6W 4000K 522lm 220-240V C37	180°	6W	4000K	522lm	E14	PLASTIC


LED light source BASIC E14 8W 220-260V C37

3-year warranty	50000 h L70B50	voltage 220-240 AC	90 lm W
180 °	37 mm	ON OFF 50000	PF 0,5



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
471215	LED light source E14 8W 3000K 720lm 220-260V C37	180°	8W	3000K	720lm	E14	PLASTIC
471222	LED light source E14 8W 4000K 720lm 220-260V C37	180°	8W	4000K	720lm	E14	PLASTIC


**LED light source BASIC GU10 3W
220-240V**


3-year warranty	50000 h L70B50	voltage 220-240 AC	80 lm W
120 °	50 mm	ON OFF 50000	PF 0,5



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
248658	LED light source GU10 3W 3000K 240lm 220-260V	120°	3W	3000K	240lm	GU10	PLASTIC
248665	LED light source GU10 3W 4000K 240lm 220-260V	120°	3W	4000K	240lm	GU10	PLASTIC
244001	LED light source GU10 3W 6500K 240lm 220-260V	120°	3W	6500K	240lm	GU10	PLASTIC


**LED light source BASIC GU10 5W
220-240V**


3-year warranty	50000 h L70B50	voltage 220-240 AC	90 lm W
120 °	50 mm	ON OFF 50000	PF 0,5



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
248689	LED light source GU10 5W 3000K 450lm 220-260V	120°	5W	3000K	450lm	GU10	PLASTIC
244346	LED light source GU10 5W 4000K 450lm 220-260V	120°	5W	4000K	450lm	GU10	PLASTIC

**LED light source BASIC GU10 7W
220-260V**


3-year warranty	50000 h L70B50	voltage 220-240 AC	83 lm W
120 °	50 mm	ON OFF 50000	PF 0,5






LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
244728	LED light source GU10 7W 3000K 600lm 220-260V	120°	5W	3000K	600lm	GU10	PLASTIC
244766	LED light source GU10 7W 6500K 600lm 220-260V	120°	5W	6500K	600lm	GU10	PLASTIC

LED light source G4 COB 1,5W 12V

3-year warranty	360°	30000 h L70B50	voltage 10-18 AC/DC	80 lm W
ON OFF 50000	1 LED	COB	PF 0,5	



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
248979	LED light source G4 COB 1,5W 2700K 120lm 12V AC/DC	360°	1,5W	2700K	120lm	G4	silicon
248986	LED light source G4 COB 1,5W 6000K 120lm 12V AC/DC	360°	1,5W	6000K	120lm	G4	silicon

LED light source G4 2W 12V

3-year warranty	13 mm	voltage 12V DC	110 lm W
270°	50000 h L70B50	ON OFF 50000	





LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
244506	G4 2W 3000K 220lm 12V DC SMD3014 SL	360°	2W	3000K	220lm	G4	silicon

LED light source G4 2W 12V



3-year warranty	13 mm	voltage 12V AC/DC	80 lm W
270°	50000 h L70B50	ON OFF 50000	



LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
244520	G4 2W 6000K 220lm 12V DC SMD3014 SL	360°	2W	6000K	220lm	G4	silicon

LED light source ES111 12W 1080lm 230V




3-year warranty	ON OFF 50000	55000 h L70B50	voltage 180-265V AC	90 lm W
NARROW BEAM ANGLE	45 °	SMD 2835	111 mm	PF 0,5

LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE
470324	LED light source ES111 12W 2700K 1080lm 230V AC 45°	45°	12W	2700K	1080lm	GU10
470331	LED light source ES111 12W 4000K 1080lm 230V AC 45°	45°	12W	4000K	1080lm	GU10

LED light source ES111 9W 850lm 175-265V




2-year warranty	ON OFF 50000	voltage 175-265V AC	95 lm W
55000 h L70B50	120 °	111 mm	

LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE
249587	LED light source ES111 9W 850lm 175-265V white	120°	9W	4000K	850lm	GU10


LED light source ES111 9W 850lm 175-265V



2-year warranty	ON OFF 50000	voltage 175-265V AC	95 lm W
55000 h L70B50	120 °	111 mm	

LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE
249624	LED light source ES111 9W 850lm 175-265V black	120°	9W	4000K	850lm	GU10

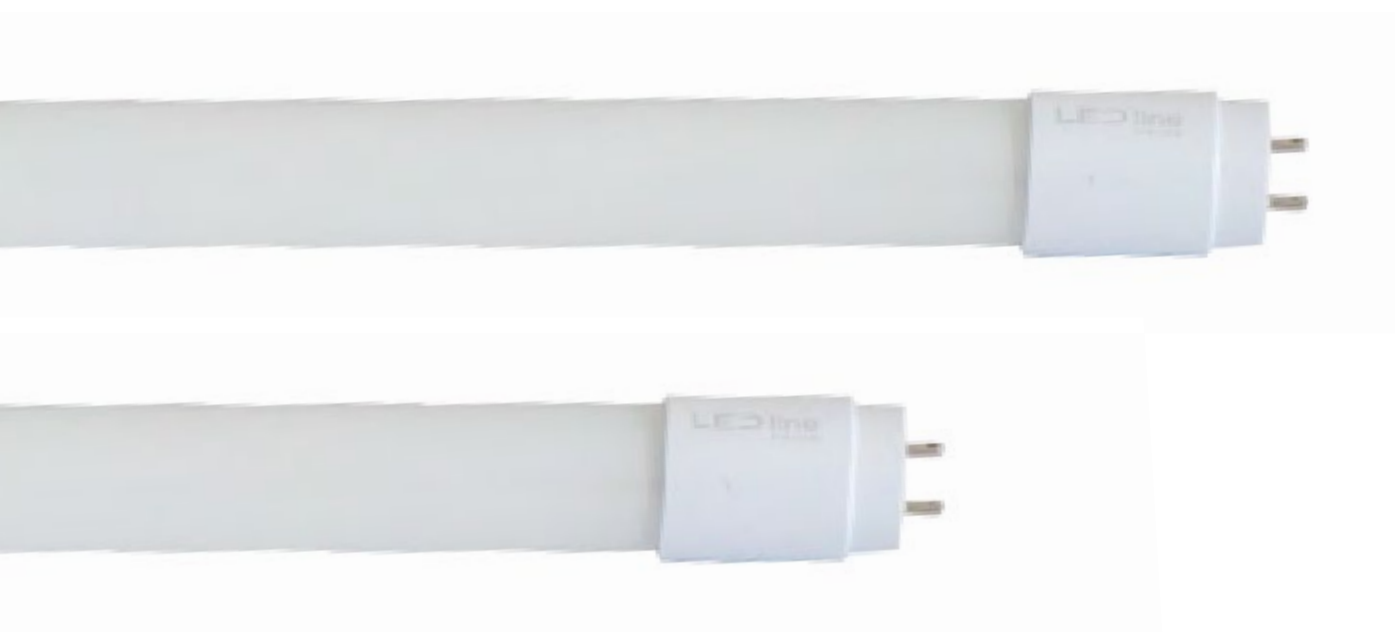


LED LIGHT SOURCES
T8 LED

T8 LED Tube 150lm/W Glass 220-240V 270°



5-year warranty	ON OFF 50000	25000 h L70B50	voltage 220-240V	150 lm W	IP20
270°	SMD 2835	T8	GLASS	PF >0,9	




LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
202061	LED Tube T8 9W 4000K 1350lm 220-240V 60cm	270°	9W	4000K	1350lm	G13/T8 LED	glass
202078	LED Tube T8 9W 6500K 1350lm 220-240V 60cm	270°	9W	6500K	1350lm	G13/T8 LED	glass
202085	LED Tube T8 18W 4000K 2700lm 220-240V 120cm	270°	18W	4000K	2700lm	G13/T8 LED	glass
202092	LED Tube T8 18W 6500K 2700lm 220-240V 120cm	270°	18W	6500K	2700lm	G13/T8 LED	glass
202108	LED Tube T8 22W 4000K 3300lm 220-240V 150cm	270°	22W	4000K	3300lm	G13/T8 LED	glass
202115	LED Tube T8 22W 6500K 3300lm 220-240V 150cm	270°	22W	6500K	3300lm	G13/T8 LED	glass

T8 LED Tube 100lm/W Glass 220-240V 270°



2-year warranty	ON OFF 50000	15000 h L70B50	voltage 220-240V	100 lm W	IP20
270°	SMD 2835	T8	GLASS	PF >0,5	




LED line LITE

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	TYPE	MATERIAL
202009	LED Tube T8 9W 4000K 900lm 220-240V 60cm	270°	9W	4000K	900lm	G13/T8 LED	glass
202016	LED tube T8 9W 6500K 900lm 220-240V 60cm	270°	9W	6500K	900lm	G13/T8 LED	glass
202023	LED Tube T8 18W 4000K 1820lm 220-240V 120cm	270°	18W	4000K	1820lm	G13/T8 LED	glass
202030	LED Tube T8 18W 6500K 1820lm 220-240V 120cm	270°	18W	6500K	1820lm	G13/T8 LED	glass
202047	LED Tube T8 22W 4000K 2265lm 220-240V 150cm	270°	22W	4000K	2265lm	G13/T8 LED	glass
202054	LED Tube T8 22W 6500K 2265lm 220-240V 150cm	270°	22W	6500K	2265lm	G13/T8 LED	glass



LED LIGHT SOURCES
ACCESSORIES

LED line light source adapter
E14



LED line LITE

SYMBOL	NAME	TYPE	SHAPE
242052	LED light source adapter E14->E27	E14	E27
242069	LED light source adapter E14->GU10	E14	GU10
246173	LED light source adapter E14->MR16	E14	MR16
246166	LED light source adapter E14->G9	E14	G9

LED line light source adapter
E27




LED line LITE

SYMBOL	NAME	TYPE	SHAPE
242076	LED light source adapter E27->E14	E27	E14
242090	LED light source adapter E27->GU10	E27	GU10
246210	LED light source adapter E27->MR16	E27	MR16
246241	LED light source adapter E27->E40	E27	E40
242083	LED light source adapter E27->2xE27	E27	2xE27

LED line Extension of bulb mounting E27

voltage
220-240V AC




LED line LITE

SYMBOL	NAME	TYPE	SHAPE	EXTENSION LENGHT
242021	LED Extension of bulb mounting E27->E27 200mm	E27	E27	20 cm
242038	LED Extension of bulb mounting E27->E14 200mm	E28	E14	20 cm
242045	LED Extension of bulb mounting E27->GU10 200mm	E29	GU10	20 cm

LED line light source adapter GU10

voltage
220-240V AC




LED line LITE

SYMBOL	NAME	TYPE	SHAPE
242113	LED light source adapter GU10->E27	GU10	E27
242106	LED light source adapter GU10->E14	GU10	E14
246180	LED light source adapter GU10->MR16	GU10	MR16

LED light source adapter MR16

voltage
220-240V AC




LED line LITE

SYMBOL	NAME	TYPE	SHAPE
246197	LED light source adapter MR16->GU10	MR16	GU10

LED light source adapter E40

voltage
220-240V AC




LED line LITE

SYMBOL	NAME	TYPE	SHAPE
246289	LED light source adapter E40->E27	E40	E27

LED light source adapter B22


voltage
220-240V AC



LED line LITE

SYMBOL	NAME	TYPE	SHAPE
246302	LED light source adapter B22->E14	B22	E14
246258	LED light source adapter B22->E27	B22	E27
246272	LED light source adapter B22->GU10	B22	GU10
246319	LED light source adapter B22->E40	B22	E40


LED Ceramic lamp holder with wire



SYMBOL	NAME	TYPE	WIRE LENGHT
246449	LED Ceramic GU10 lamp holder with 13cm wire	GU10	14 cm
246685	LED Ceramic GU5,3 lamp holder with 16cm wire	GU5.3	16 cm



Table lamp TAZA 3,5W CCT 4000mAh IP54



LED line LITE

SYMBOL	NAME	POWER	CCT	LUMINOUS
203846	Table lamp TAZA 3,5W 3000K ÷ 5000K 400lm white	3,5W	3000K ÷ 5000K	400lm
203853	Table lamp TAZA 3,5W 3000K ÷ 5000K 400lm black	3,5W	3000K ÷ 5000K	400lm
204430	Table lamp TAZA 3,5W 3000K ÷ 5000K 400lm green	3,5W	3000K ÷ 5000K	400lm
204447	Table lamp TAZA 3,5W 3000K ÷ 5000K 400lm pastel pink	3,5W	3000K ÷ 5000K	400lm
208971	Table lamp TAZA 3,5W 3000K ÷ 5000K 400lm gold	3,5W	3000K ÷ 5000K	401lm
208694	Table lamp TAZA 3,5W 3000K ÷ 5000K 400lm yellow	3,5W	3000K ÷ 5000K	401lm

round design,
360 degree illumination

dimming
function

touch
control



DECORATIVE
CAMELIA


universal type C
USB charging

aluminium
housing

CCT

3000K / 4000K / 5000K

Table lamp CAMELIA 2,5W CCT 4000mAh IP20



LED line LITE

SYMBOL	NAME	POWER	CCT	LUMINOUS
204423	Table lamp CAMELIA 2,5W 3000K ÷ 5000K 250lm black	2,5W	3000K ÷ 5000K	250
204454	Table lamp CAMELIA 2,5W 3000K ÷ 5000K 250lm silver	2,5W	3000K ÷ 5000K	250
204461	Table lamp CAMELIA 2,5W 3000K ÷ 5000K 250lm gold	2,5W	3000K ÷ 5000K	250

lightweight
and portable

dimming
function

touch
control



DECORATIVE
RIWIA

CCT

3000K / 4000K / 5000K

Table lamp RIWIA 1,0W CCT 1800mAh IP20

2-year warranty

MAX
-20 ÷ 40°C

115 lm
W

IP20

Li-ion
1x 3,7V
1800mAh

3H-100%

8H

TOUCH SENSITIVE



LED line LITE

SYMBOL	NAME	POWER	CCT	LUMINOUS
204492	Table lamp RIWIA 1,0W 3000K ÷ 5000K 120lm gold	1,0W	3000K ÷ 5000K	120
204478	Table lamp RIWIA 1,0W 3000K ÷ 5000K 120lm silver	1,0W	3000K ÷ 5000K	120
204485	Table lamp RIWIA 1,0W 3000K ÷ 5000K 120lm rose gold	1,0W	3000K ÷ 5000K	120



DECORATIVE
JUTE

JUTE pendant lamp holder 1,5 meters 220-240V

3-year
warranty


voltage
220-240V AC

pvc




LED line LITE


SYMBOL	NAME	QUANTITY OF LIGHT POINTS	EXTENSION LENGHT	MATERIAL	VOLTAGE
249877	JUTE pendant lamp holder 1.5 meters 1xE27	1	150 cm	jute cord	220-240VAC
249884	JUTE pendant lamp holder 1.5 meters 2xE27	2	150 cm	jute cord	220-240VAC
249891	JUTE pendant lamp holder 1.5 meters 3xE27	3	150 cm	jute cord	220-240VAC



249877



249884




249891



LED SPOTLIGHTS
CLASSIC


Recessed round spotlight / die-cast



LED line PRIME

SYMBOL	NAME	FIXTURE COLOUR	SHAPE	MOUNTING HOLE SIZE	MOUNTING TYPE	MATERIAL
241321	Recessed round spotlight sanded	gold & black	round	75mm	recessed	aluminium


Recessed round spotlight / die-cast



LED line PRIME

SYMBOL	NAME	FIXTURE COLOUR	SHAPE	MOUNTING HOLE SIZE	MOUNTING TYPE	MATERIAL
241314	Recessed round spotlight sanded	gold & white	round	75mm	recessed	aluminium


Recessed adjustable round spotlight



LED line PRIME

SYMBOL	NAME	FIXTURE COLOUR	SHAPE	MOUNTING HOLE SIZE	MOUNTING TYPE	FEATURE	MATERIAL
244902	Recessed adjustable round spotlight brushed	black & silver	round	70mm	recessed	adjustable	aluminium
244810	Recessed adjustable round spotlight brushed	silver	round	70mm	recessed	adjustable	aluminium
244896	Recessed adjustable round spotlight sanded	silver	round	70mm	recessed	adjustable	aluminium
244896	Recessed adjustable round spotlight sanded	silver	round	70mm	recessed	adjustable	aluminium



Recessed adjustable round spotlight SLIM OROSA



LED line PRIME

SYMBOL	NAME	FIXTURE COLOUR	SHAPE	MOUNTING HOLE SIZE	MOUNTING TYPE	FEATURE	MATERIAL
241284	Recessed adjustable round spotlight SLIM OROSA matt	white	round	85mm	recessed	adjustable	aluminium
241253	Recessed adjustable round spotlight SLIM OROSA brushed	black	round	85mm	recessed	adjustable	aluminium
241239	Recessed adjustable round spotlight SLIM OROSA brushed	silver	round	85mm	recessed	adjustable	aluminium


Recessed adjustable square spotlight SLIM AKROS



LED line PRIME

SYMBOL	NAME	FIXTURE COLOUR	SHAPE	MOUNTING HOLE SIZE	MOUNTING TYPE	FEATURE	MATERIAL
241208	Recessed adjustable square spotlight SLIM AKROS brushed	black	square	85mm	recessed	adjustable	aluminium
241215	Recessed adjustable square spotlight SLIM AKROS brushed	silver	square	85mm	recessed	adjustable	aluminium
241222	Recessed adjustable square spotlight SLIM AKROS matt	white	square	85mm	recessed	adjustable	aluminium



Recessed round spotlight / die-cast



LED line PRIME

SYMBOL	NAME	FIXTURE COLOUR	SHAPE	MOUNTING HOLE SIZE	FEATURE	MATERIAL
249235	LED line Recessed round spotlight	black	round	65mm	recessed	aluminium
242823	LED line Recessed round spotlight	satın	round	65mm	recessed	aluminium
242854	LED line Recessed round spotlight	white	round	65mm	recessed	aluminium

Recessed adjustable round spotlight / die-cast





LED line PRIME

SYMBOL	NAME	FIXTURE COLOUR	SHAPE	MOUNTING HOLE SIZE	MOUNTING TYPE	FEATURE	MATERIAL
242885	Recessed adjustable round spotlight	satin	round	80mm	recessed	adjustable	aluminium
242915	Recessed adjustable round spotlight	white	round	80mm	recessed	adjustable	aluminium
249259	Recessed adjustable round spotlight	black	round	80mm	recessed	adjustable	aluminium

Recessed adjustable square spotlight / die-cast



**RYSUNKI
ODWRÓCIĆ W
DÓŁ**



LED line PRIME

SYMBOL	NAME	FIXTURE COLOUR	SHAPE	MOUNTING HOLE SIZE	MOUNTING TYPE	FEATURE	MATERIAL
242939	Recessed adjustable square spotlight	gold	square	75mm	recessed	adjustable	aluminium
242946	Recessed adjustable square spotlight	satin	square	75mm	recessed	adjustable	aluminium
242977	Recessed adjustable square spotlight	white	square	75mm	recessed	adjustable	aluminium

Downlight alu. square brushed adjustable




LED line LITE

SYMBOL	NAME	FIXTURE COLOUR	SHAPE	MOUNTING HOLE SIZE	MOUNTING TYPE	FEATURE	MATERIAL
241093	Downlight alu. square black brushed adjustable	black	square	75-80mm	recessed	adjustable	aluminium
240683	Downlight alu. square black brushed adjustable	white	square	75-80mm	recessed	adjustable	aluminium
240669	Downlight alu. square black brushed adjustable	silver	square	75-80mm	recessed	adjustable	aluminium



LED SPOTLIGHTS
WATERPROOF


LED line Recessed waterproof round spotlight / MR11



LED line PRIME

SYMBOL	NAME	FIXTURE COLOUR	SHAPE	MOUNTING HOLE SIZE	MOUNTING TYPE	FEATURE	MATERIAL
249266	LED line Recessed waterproof round spotlight / die-cast / MR11	white	round	45mm	recessed	waterproof	zinc
249273	LED line Recessed waterproof round spotlight / die-cast / MR11	chrome	round	45mm	recessed	waterproof	zinc
249297	LED line Recessed waterproof round spotlight / die-cast / MR11	black	round	45mm	recessed	waterproof	zinc


LED line Recessed waterproof round spotlight / die-cast



LED line PRIME

SYMBOL	NAME	FIXTURE COLOUR	SHAPE	MOUNTING HOLE SIZE	MOUNTING TYPE	FEATURE	MATERIAL
245428	LED line Recessed waterproof round spotlight / die-cast	white	round	73mm	recessed	waterproof	aluminium
245435	LED line Recessed waterproof round spotlight / die-cast	chrome	round	73mm	recessed	waterproof	aluminium
245442	LED line Recessed waterproof round spotlight / die-cast	satın	round	73mm	recessed	waterproof	aluminium
471055	LED line Recessed waterproof round spotlight / die-cast	black	round	73mm	recessed	waterproof	aluminium



LED line Recessed waterproof square spotlight / die-cast



LED line PRIME

SYMBOL	NAME	FIXTURE COLOUR	SHAPE	MOUNTING HOLE SIZE	MOUNTING TYPE	FEATURE	MATERIAL
245374	LED line Recessed waterproof square spotlight / die-cast	white	square	73mm	recessed	waterproof	aluminium
245398	LED line Recessed waterproof square spotlight / die-cast	satın	square	73mm	recessed	waterproof	aluminium
471062	LED line Recessed waterproof square spotlight / die-cast	black	square	73mm	recessed	waterproof	aluminium

LED line Surface round spotlight / TUBE




LED line PRIME

SYMBOL	NAME	FIXTURE COLOUR	SHAPE	MOUNTING TYPE	FEATURE	MATERIAL
242540	LED line Surface round spotlight / TUBE	white	round	surface	waterproof	aluminium
242557	LED line Surface round spotlight / TUBE	black	round	surface	waterproof	aluminium



LED SPOTLIGHTS
ROLLO

ROLLO MIDI Recessed round spotlight



5-year warranty

0.5 m

F

RECESSED

MAX 35W

IP20

MATT

ADJUSTABLE

III

45°

aluminum




LED line PRIME

SYMBOL	NAME	FIXTURE COLOR	SHAPE	MOUNTING HOLE SIZE	MOUNTING TYPE	FEATURE	MATERIAL
242656	ROLLO MIDI Recessed round spotlight	black	round	85mm	recessed	adjustable	aluminium
243851	ROLLO MIDI Recessed round spotlight	white	round	85mm	recessed	adjustable	aluminium
243134	ROLLO MIDI Recessed round spotlight	silver	round	85mm	recessed	adjustable	aluminium



LED SPOTLIGHTS
CUBO

**Downlight recessed-mounted square
white CUBO MIDI**




5-year warranty	0.5 m	F	85 mm	MAX 35W	IP20
MATT	ADJUSTABLE	III	RECESSED	45°	aluminum



LED line PRIME

SYMBOL	NAME	FIXTURE COLOR	SHAPE	MOUNTING HOLE SIZE	FEATURE	MATERIAL
243141	Downlight recessed-mounted square white CUBO MIDI	white	square	85mm	recessed	aluminium

**Tube surface spotlight square adjustable
white CUBO**




5-year warranty	0.5 m	F	GU10	MAX 35W	IP20
MATT	ADJUSTABLE	III	45°	aluminum	



LED line PRIME

SYMBOL	NAME	FIXTURE COLOR	SHAPE	MOUNTING TYPE	FEATURE	MATERIAL
249723	Tube surface spotlight square adjustable white CUBO	white	square	surface	adjustable	aluminium

**Tube surface spotlight square adjustable
brushed silver CUBO**



5-year warranty	0.5 m	F	GU10	MAX 35W	IP20
BRUSHED	ADJUSTABLE	III	45°	aluminum	



LED line PRIME

SYMBOL	NAME	SHAPE	MOUNTING TYPE	FEATURE	MATERIAL
249747	LED line® tube surface spotlight square adjustable brushed silver CUBO	square	surface	adjustable	aluminium




LED MODULES
EXPERT

LED Opto module 1W IP65



7-year warranty	PWM	Waterproof	70000 h L70B50	0.5 m	F	ON OFF 50000	95 lm W	IP65
SMD 2835	170 °	LED provided by OSRAM	MAX -40 ÷ 55	* IES	PVC	voltage 12V DC	1 LED	




LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	VOLTAGE	LED
243400	LED OPTO module 1x SMD2835 12V 6500K 1W IP65	170°	1W	6500K	95lm	12V	SMD2835

LED Opto module 2W IP65



7-year warranty	PWM	Waterproof	70000 h L70B50	0.5 m	F	ON OFF 50000	95 lm W	IP65
SMD 2835	170 °	LED provided by OSRAM	MAX -40 ÷ 55	* IES	PVC	voltage 12V DC	2 LED	




LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	VOLTAGE	LED
243417	LED OPTO module 2x SMD2835 12V 6500K 2W IP65	170°	2W	6500K	190lm	12V	SMD2835

LED Opto module 2,5W IP65



7-year warranty	PWM	Waterproof	70000 h L70B50	0.5 m	F	ON OFF 50000	95 lm W	IP65
SMD 2835	170 °	LED provided by OSRAM	MAX -40 ÷ 55	* IES	PVC	voltage 12V DC	3 LED	



LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	VOLTAGE	LED
243424	LED OPTO module 3x SMD2835 12V 6500K 2,5W IP65	170°	2.5W	6500K	237lm	12V	SMD2835

LED Opto module 3W IP65

7-year warranty

PWM

70000 h L70B50

0.5 m



50000

95 lm W

IP65

SMD 2835

170 °

LED provided by OSRAM


MAX -40 ÷ 55

*.IES

PVC

voltage 12V DC

4 LED





LED line PRIME

SYMBOL	NAME	BEAM ANGLE	POWER	CCT	LUMINOUS	VOLTAGE	LED
243431	LED OPTO module 4x SMD2835 12V 6500K 3W IP65	170°	3W	6500K	285lm	12V	SMD2835



LED DRIVERS CONTROLLERS


VARIANTE LED Controller 5in1



LED line PRIME

SYMBOL	NAME	POWER SUPPLY	MAX. OUTPUT	COMMUNICATION	FUNCTION
477781	VARIANTE LED Controller RF WIFI Tuya 5in1	12-24V	20A (4A/channel)	RF 2,4GHz / WIFI	DIM/CCT/RGB/RGBW/RGB CCT


VARIANTE LED Controller DIM



LED line PRIME

SYMBOL	NAME	POWER SUPPLY	MAX. OUTPUT	COMMUNICATION	FUNCTION
471277	VARIANTE LED Controller RF WIFI Tuya DIM	12-24V	16A (4A/channel)	RF 2,4GHz / WIFI	DIM


VARIANTE LED Controller CCT



LED line PRIME

SYMBOL	NAME	POWER SUPPLY	MAX. OUTPUT	COMMUNICATION	FUNCTION
471284	VARIANTE LED Controller RF WIFI Tuya CCT	12-24V	16A (4A/channel)	RF 2,4GHz / WIFI	CCT


VARIANTE LED Controller RGB



LED line PRIME

SYMBOL	NAME	POWER SUPPLY	MAX. OUTPUT	COMMUNICATION	FUNCTION
471291	VARIANTE LED Controller RF WIFI TUYA RGB	12-24V	15A (5A/channel)	RF 2,4GHz / WIFI	RGB



VARIANTE LED Controller RGBW



LED line PRIME

SYMBOL	NAME	POWER SUPPLY	MAX. OUTPUT	COMMUNICATION	FUNCTION
471307	VARIANTE LED Controller RF WIFI TUYA RGBW	12-24V	16A (4A/channel)	RF 2,4GHz / WIFI	RGBW


VARIANTE LED Controller RGB/RGBW



LED line PRIME

SYMBOL	NAME	POWER SUPPLY	MAX. OUTPUT	COMMUNICATION	FUNCTION
471314	VARIANTE LED Controller RF RGB/RGBW + remote controller	12-24V	16A (4A/channel RGBW, 5A/channel RGB)	RF 433,92Mhz	RGB/RGBW


VARIANTE LED Controller RGBCCT



LED line PRIME

SYMBOL	NAME	POWER SUPPLY	MAX. OUTPUT	COMMUNICATION	FUNCTION
201231	VARIANTE LED Controller RF WIFI TUYA RGBCCT	12-24V	15A (3A/channel)	RF 2,4GHz / WIFI	RGBCCT



VARIANTE LED Controller SPI DIGITAL RGB



LED line PRIME

SYMBOL	NAME	POWER SUPPLY	MAX. OUTPUT	COMMUNICATION	FUNCTION
201286	VARIANTE LED Controller RF SPI DIGITAL	12-24V	15A (3A/channel)	RF 2,4GHz	SPI DIGITAL



VARIANTE LED Remote Controller DIM/CCT



LED line PRIME

SYMBOL	NAME	POWER SUPPLY	MAX. OUTPUT	COMMUNICATION	FUNCTION
471321	REMOTE for VARIANTE Controller DIM/CCT	DC 3V 2*AAA	20M	RF 2,4GHz	DIM/CCT



VARIANTE LED Remote Controller RGB/RGBW



LED line PRIME

SYMBOL	NAME	POWER SUPPLY	MAX. OUTPUT	COMMUNICATION	FUNCTION
471338	RF REMOTE for VARIANTE Controller RGB/RGBW	DC 3V 2*AAA	20M	RF 2,4GHz	RGB/RGBW


VARIANTE LED Remote Controller DIM/CCT MAG JOY



LED line PRIME

SYMBOL	NAME	POWER SUPPLY	MAX. OUTPUT	COMMUNICATION	FUNCTION
476937	RF MAG JOY REMOTE for VARIANTE Controller DIM/CCT	DC 3V 2*AAA	30M	RF 2,4GHz	DIM/CCT


VARIANTE LED Wall Remote Controller DIM/CCT



LED line PRIME

SYMBOL	NAME	POWER SUPPLY	MAX. OUTPUT	COMMUNICATION	FUNCTION
201200	WALL RF REMOTE for VARIANTE Controller DIM/CCT	90-265VAC	20M	RF 2,4GHz	DIM/CCT


VARIANTE LED Wall Remote Controller RGB



LED line PRIME

SYMBOL	NAME	POWER SUPPLY	MAX. OUTPUT	COMMUNICATION	FUNCTION
201217	WALL RF REMOTE for VARIANTE Controller RGB	90-265VAC	20M	RF 2,4GHz	RGB

VARIANTE LED Remote Controller RGBW/RGBCCT





LED line PRIME

SYMBOL	NAME	POWER SUPPLY	MAX. OUTPUT	COMMUNICATION	FUNCTION
201224	RF REMOTE for VARIANTE Controller RGBW/RGBCCT	DC 3V 2*AAA	20M	RF 2,4GHz	RGBW/RGBCCT



LED DRIVERS WATERPROOF


Power supply 12W IP67



LED line PRIME

SYMBOL	NAME	POWER	VOLTAGE	IP CLASS
LL-12-12	Power supply 12W IP67 12V	12W	12V	IP67
LL-12-24	Power supply 12W IP67 12V	12W	24V	IP67


Power supply 20W IP67



LED line PRIME

SYMBOL	NAME	POWER	VOLTAGE	IP CLASS
LL-20-12	Power supply 20W IP67 12V	20W	12V	IP67
LL-20-24	Power supply 20W IP67 12V	20W	24V	IP67


Power supply 36W IP67



LED line PRIME

SYMBOL	NAME	POWER	VOLTAGE	IP CLASS
LL-35-12	Power supply 36W IP67 12V	36W	12V	IP67
LL-35-24	Power supply 36W IP67 24V	36W	24V	IP67


Power supply 50W IP67



LED line PRIME

SYMBOL	NAME	POWER	VOLTAGE	IP CLASS
LL-50-12	Power supply 50W IP67 12V	50W	12V	IP67
LL-50-24	Power supply 50W IP67 24V	50W	24V	IP67



Power supply 60W IP67



LED line PRIME

SYMBOL	NAME	POWER	VOLTAGE	IP CLASS
LL-60-12	Power supply 60W IP67 12V	60W	12V	IP67
LL-60-24	Power supply 60W IP67 24V	60W	24V	IP67


Power supply 75W IP67



LED line PRIME

SYMBOL	NAME	POWER	VOLTAGE	IP CLASS
LL-75-12	Power supply 75W IP67 12V	75W	12V	IP67
LL-75-24	Power supply 75W IP67 24V	75W	24V	IP67


Power supply 100W IP67



LED line PRIME

SYMBOL	NAME	POWER	VOLTAGE	IP CLASS
LL-100-12	Power supply 100W IP67 12V	100W	12V	IP67
LL-100-24	Power supply 100W IP67 24V	100W	24V	IP67

LED Driver 150W IP67



LED line PRIME


SYMBOL	NAME	POWER	VOLTAGE	IP CLASS
LL-150-12	Power supply 150W IP67 12V	150W	12V	IP67
LL-150-24	Power supply 150W IP67 24V	150W	24V	IP67



LED DRIVERS

MULTIPOWER


LED Multipower sensor Hand Motion

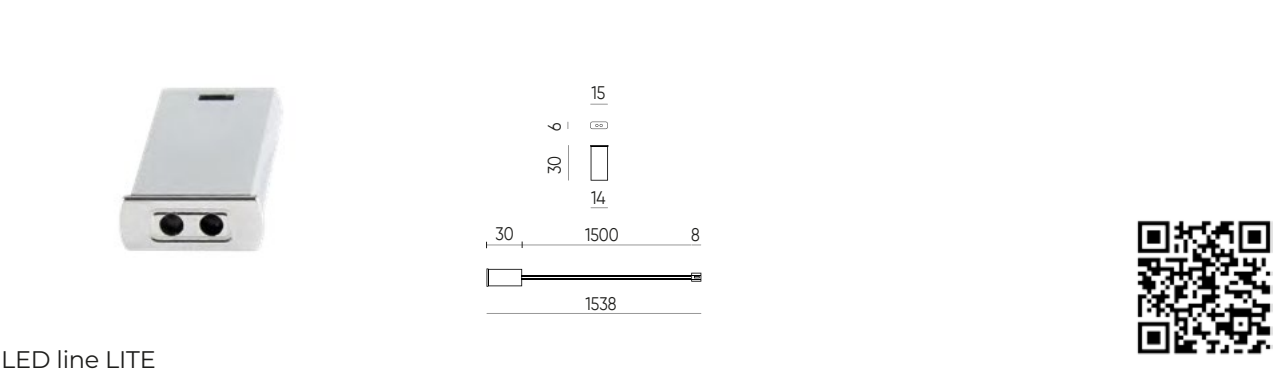

LED line LITE

SYMBOL	NAME	SENSOR TYPE
477965	LED Master Sensor Hand Motion On/Off	PROXIMITY
478009	LED Channel Sensor Hand Motion On/Off	PROXIMITY


LED Multipower sensor PIR

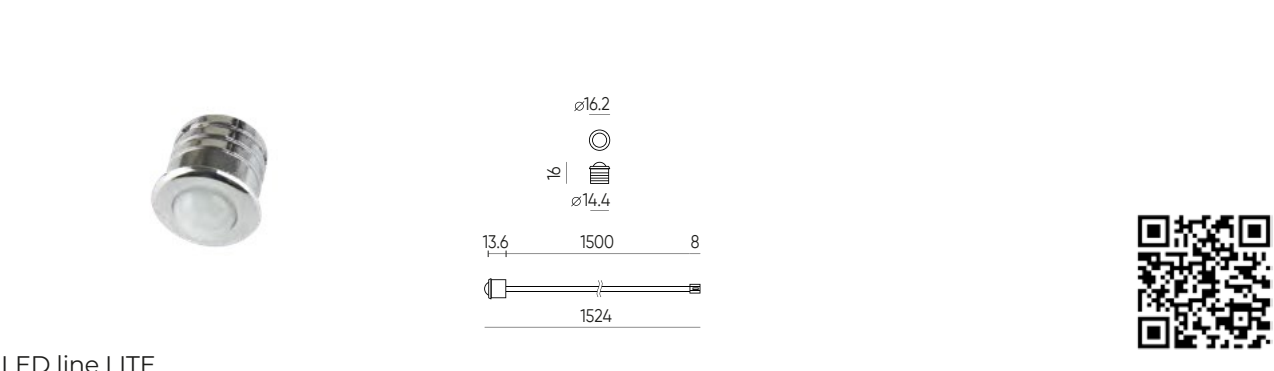

LED line LITE

SYMBOL	NAME
477989	LED Master Sensor PIR
478023	LED Channel Sensor PIR


LED Multipower Touch ON/OFF/
DIMMER

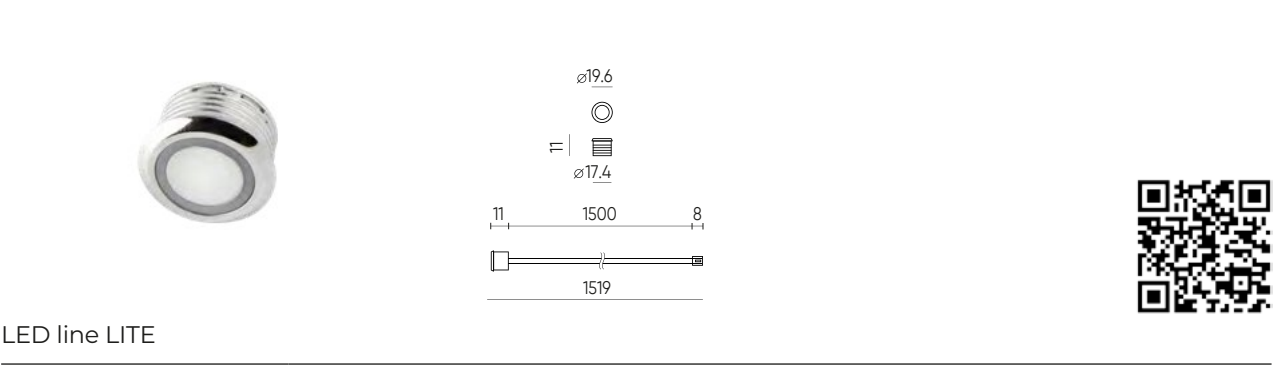

LED line LITE

SYMBOL	NAME
477958	LED Master Sensor Touch On/Off Dimmer
477996	LED Channel Sensor Touch On/Off Dimmer

LED Multipower IR Door



LED line LITE

SYMBOL	NAME
477972	LED Master Sensor IR Door
478016	LED Channel Sensor IR Door


LED Multipower driver 60W 12V



LED line LITE

SYMBOL	NAME	POWER	VOLTAGE	IP CLASS
477736	LED Multipower 60-12 5A 60W 12V IP20	60W	12V	IP20

LED Multipower wire



LED line LITE

SYMBOL	NAME
477934	LED Multipower Przewód do taśmy LED 2m
477927	LED Multipower Przewód przedłużający 2m

LED Multipower splitter



LED line LITE


SYMBOL	BRAND	NAME
477941	LED line LITE	LED Multipower Splitter 6 portów



LED PROFILES

LED Profile Surface set

IP20




LED line PRIME

SYMBOL	NAME	MAX STRIP WIDE	LENGHT	HIGH	WIDE	MOUNTING TYPE	COLOUR
203617	LED Surface Profile 10mm anodized 2000 mm with milky cover	12mm	2000 mm	9,5 mm	16 mm	surface	anodized
203624	LED Surface Profile 10mm white 2000 mm with milky cover	12mm	2000 mm	9,5 mm	16 mm	surface	white
203631	LED Surface Profile 10mm black 2000 mm with milky cover	12mm	2000 mm	9,5 mm	16 mm	surface	black

LED Profile Corner set

IP20




LED line PRIME

SYMBOL	NAME	MAX STRIP WIDE	LENGHT	HIGH	WIDE	MOUNTING TYPE	COLOUR
203648	LED Corner Profile 10mm anodized 2000 mm with milky cover	12mm	2000 mm	16,6mm	16,6mm	Corner	anodized
203655	LED Corner Profile 10mm white 2000 mm with milky cover	12mm	2000 mm	16,6mm	16,6mm	Corner	white
203662	LED Corner Profile 10mm black 2000 mm with milky cover	12mm	2000 mm	16,6mm	16,6mm	Corner	black


LED Profile Recessed set

IP20



LED line PRIME

SYMBOL	NAME	MAX STRIP WIDE	LENGHT	HIGH	WIDE	MOUNTING TYPE	COLOUR
203679	LED Recessed Profile 10mm anodized 2000 mm with milky cover	12mm	2000 mm	9,5 mm	16 mm	Recessed	anodized
203686	LED Recessed Profile 10mm white 2000 mm with milky cover	12mm	2000 mm	9,5 mm	16 mm	Recessed	white
203693	LED Recessed Profile 10mm black 2000 mm with milky cover	12mm	2000 mm	9,5 mm	16 mm	Recessed	black

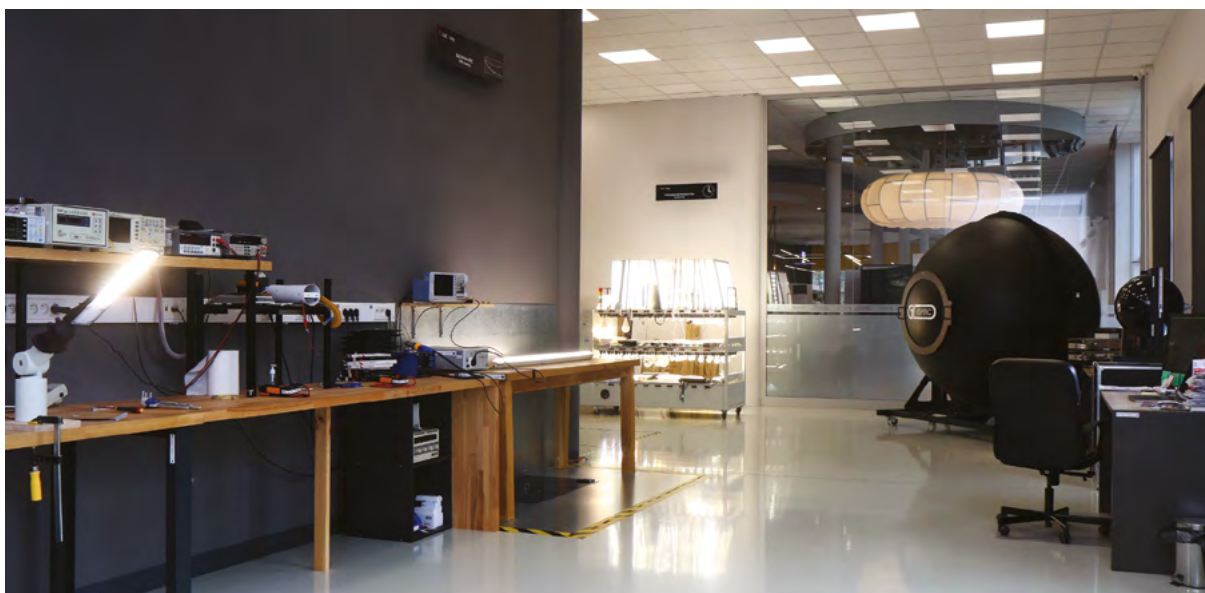

Quality without compromise

LED line LAB's most important goal is to create and verify products so that they meet all, even the most restrictive directives and standards, which are the company's current standard. The great attention with which we treat product quality, i.e. failure-free, durability and safety, results in 99.54% compliance, i.e. our complaint rate is only 0.46%.

Quality tests are conducted on a continuous basis and apply to each batch of products - the condition for release for sale is a positive and complete quality test. Thanks to this, we are sure that in the hands of our customers get products with which there are no problems either at the stage of sale, investment implementation or use.

In search of optimal solutions

The task of the R&D department is to develop new products according to market expectations and needs. A full process is carried out - from conception, through prototyping, to production and implementation. Thanks to the analyses carried out, we know what products should be introduced to make the LED line offer as complementary and optimized as possible, and thus bring a higher level of return on investment.


Equipment at the highest available level

The investments made in LED line LAB enable us to achieve the highest quality parameters, which is especially appreciated by our business partners.



The laboratory has been equipped with high-end equipment such as:

- Photometric darkroom equipped with a goniophotometer
- Test stand for light and radiation parameters
- Stand for electromagnetic compatibility EMC measurements
- Stand for aging tests
- Stand for harmonic emission measurements
- Thermal test stand with equipment: 16-channel temperature meter and thermal imaging camera
- Test stand for voltage drops of LED tapes
- Test stand for dimmable light sources

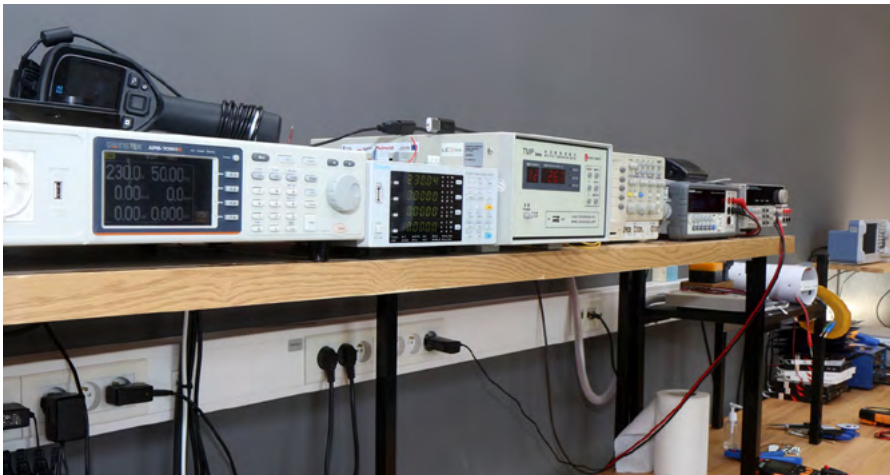

Expert support for designers

Thanks to the ability to generate authoritative IES and EULUMDAT files, designers working with us can create designs with a high degree of precision, which is particularly valuable given the expectations of the market, especially the investment market. We generate high-quality photometric files that, when imported into Dialux or Relux programs, allow us to select the right type and quantity of luminaires for any type of project.

Education that builds the future of the market

The LED market is growing rapidly, and thus becoming more demanding. Our mission, therefore, is not only to offer the most effective products and solutions, but also to constantly share knowledge and experience. Education raises market expectations, and we are ready to meet them. We provide training to our strategic business partners, distributors, customers and employees.



LED line

LEDIN Group Sp. z o.o.
Dębowa 1
07-410 Tobolice
Poland

kontakt@ledline.pl
www.ledline.eu